BEVERAGE-AIR

PROJECT: _____

ITEM # _____ QTY: _____

MODEL # _____

AIA # _____ SIS # _____

APPROVED: _____

WORKTOP REFRIGERATORS

Model: WTFR48AHC

TWO DOORS/ DUAL TEMP FREEZER/ REFRIGERATOR



7 YEAR WARRANTY

Parts, Labor, and Compressor

CABINET CONSTRUCTION

- Stainless steel front, sides, doors and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel worktop for added durability
- 4" Removable backsplash for flexibility and ease of cleaning
- Dual Temp: left side refrigerator, right side freezer units provide two different operating temperature zones for different types of products
- Interior thermometer is standard
- Self-closing door with 120˚ stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- Field-reversible door (hinge kit not included)
- Four (4) epoxy-coated steel wire shelves
- 6" Casters, two (2) with brakes standard

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Additional shelves
- Shelf clips
- Glass door option
- Right or left hinged door
- Locks
- Wire shelf divider
- 3" Casters
- 6" legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Refrigerator maintains product temperatures between 36°F and 38°F
- Freezer maintains product temperature from -10°F and below

3779 Champion Blvd., Winston-Salem, NC 27105
888-845-9800 Fax: 336-245-6453
Beverage-Air.com Sales@bevair.com

Please verify qualifying units by visiting:
www.energystar.gov/cfs


Specifications are subject to change without prior notice.

Date Issued 10/26 Printed in U.S.A.


BEVERAGE-AIR

Worktop Refrigerators
Model: WTFR48AHC


PLAN VIEW

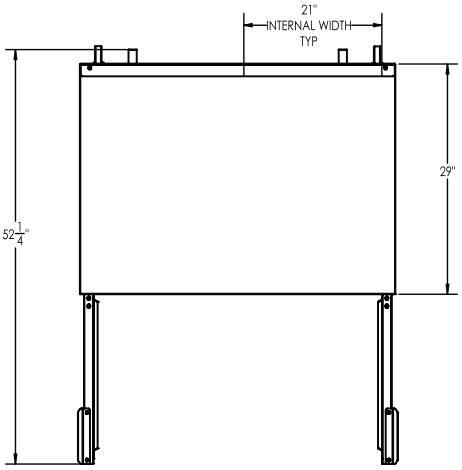

ELEVATION VIEW

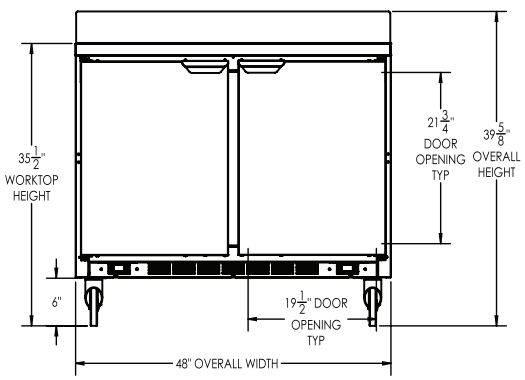

SIDE VIEW

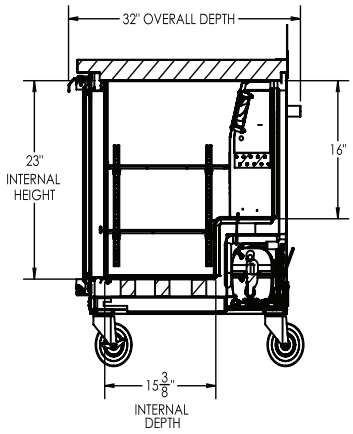

EXTERNAL DIMENSIONAL DATA	
Width Overall (in)	48”
Depth Overall (in)	32”
Height Overall (in)	39 5/8”
Number of Doors	2
Depth with Door Open 90 °	52 1/4”
Door Openings (in)	19 1/2” x 21 3/4”
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft).	F 5.31 / R 5.31
Internal Width Overall (in)	(2) 21”
Internal Depth Overall (in)	15 3/8”
Internal Height Overall (in)	23”
Number of Shelves	4

*NOTE: Remote units are field wired and come with 6” legs.
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Required Clearance: 3” Bottom & 2” Rear

ELECTRICAL DATA	
Full Load Amps	(F) 2.5 (R) 2.0
Voltage	115/60/1
Nema Plug (8’ cord)	(2) 5-15P
REFRIGERATION DATA	
Horsepower	(F) 1/4 (R) 1/6
Capacity (BTU/Hr)	(F) 857 (R) 1110
Heat Rejection (BTU/Hr)	2950.5
Charge (lbs/grams/ounces)	(F) 0.0992 / 45 / 1.59 (R) 0.1323 / 60 / 2.12
SHIPPING DATA	
Gross Weight - Crated	314 lbs.
Height - Crated (in)	38”
Width - Crated (in)	51”
Depth - Crated (in)	33”

ELECTRICAL CONNECTION



115/601
NEMA 5-15P

Unit pre-wired at factory and include 8’ long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 10/26 | Printed in U.S.A.

WELBILT
an Ali Group Company