Project:_____

Location:_____

Item #:_____ Quantity:_____

Model #:_____

MODEL: IRR-AGN300CR
IRR-AGN600CR

Slimline Reach-in Refrigerators



IRR-AGN300CR



IRR-AGN600CR

General Strengths

- ✓ ***Sanitation.*** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ ***Doors.*** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ ***Control systems.*** Higher precision in managing temperature settings. Greater ability for the adjustment of temperatures ranges as per the end user's requirement.
- ✓ ***100% Tested.*** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ ***Lighting.*** LED lighting in cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate División
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599
www.infrico.us
sales@infrico.com

Project:_____

Location:_____

Item #:_____ Quantity:_____

Model #:_____

MODEL: IRR-AGN300CR
IRR-AGN600CR

Slimline Reach-in Refrigerators

STANDARD FEATURES

- **Exterior**
  - AISI 304 Stainless Steel.
  - Completely injected compact structure.
- **Interior**
  - AISI 304 Stainless Steel.
  - Wide rounded corners to aid cleaning.
  - LED lighting, RGB.
  - Internal drain.
- **Door**
  - Self-closing with stay open feature.
  - Integrated door handles.
  - Stainless Steel covered hinges.
  - Triple chamber snap in door seals for easy removal.
  - Door lock provided.
  - Double pane glass door, tempered and low-e.
- **Insulation**
  - CFC- Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation.
  - Low GWP & Zero ODP effect.
- **Casters**
  - 4" diameter casters.
  - Locks provided on front set.

OPTIONAL FEATURES

- ✓ Stainless Steel wire shelf.
- ✓ Set of 6” legs, height adjustable from 5” to 8”.
- ✓ Additional slide kits.
- ✓ Electrical connection is 230 V / 1 ph / 50 Hz (Plug type and consumption varies).
- ✓ IRR-AGN300CR – 1.64 A

  IRR-AGN600CR – 1.74 A

- **Shelving**
  - (4/8) Four plastic coated wire shelves single door with stainless steel tray slides included.
  - Dimensions WxD: 12-51/64” x 20-55/64” (325 x 530 mm).
  - Tray slides are compatible with 12”x 20” (305x660mm) sheet pans.
- **Refrigeration**
  - Temperature and defrost regulated by digital controller.
  - Evaporative pan.
  - Evaporator coil coated with anti-corrosion material.
  - **Refrigeration capacity:**

    IRR-AGN300CR– 1510 Btu/h(14ºF)/ 443 W(-10ºC).

    IRR-AGN600CR– 2117 Btu/h(14ºF)/ 621 W(-10ºC).
- **Electrical**



  - Cord and NEMA 5-15P plug,
  - Electrical connection is 115V / 1ph / 60 Hz.
- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

INFRICO-North America Corporate División
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com

Project:_____

Location:_____

Item #:_____ Quantity:_____

Model #:_____


MODEL: IRR-AGN300CR
IRR-AGN600CR


Slimline Reach-in Refrigerators

MODELS	Dimensions (inches) (mm)			Doors	Shelves	Ref.	Ref.Weight (Lbs.) (gr.)	Temperature Range (ºF) (ºC)	Cond. Unit (H.P)	Capacity (Cu.Ft.) (L)	Case Amps 115V	Net weight (Lbs.) (Kg.)
	W	D	H									
IRR-AGN300CR	19 (482)	27-7/8 (709)	82-1/16 (2085)	1	4	R290	0,22 (100)	36 ºF/43 ºF (+2ºC/+6ºC)	1/3	11 (325)	3,60	300 (136)
IRR-AGN600CR	38-3/8 (974)	27-7/8 (709)	82-1/16 (2085)	2	8	R290	0,24 (110)	36 ºF/43 ºF (+2ºC/+6ºC)	3/8	26,30 (745)	4,85	414 (188)

PLAN VIEW

ELEVATION | RIGHT VIEW | PLANT VIEW

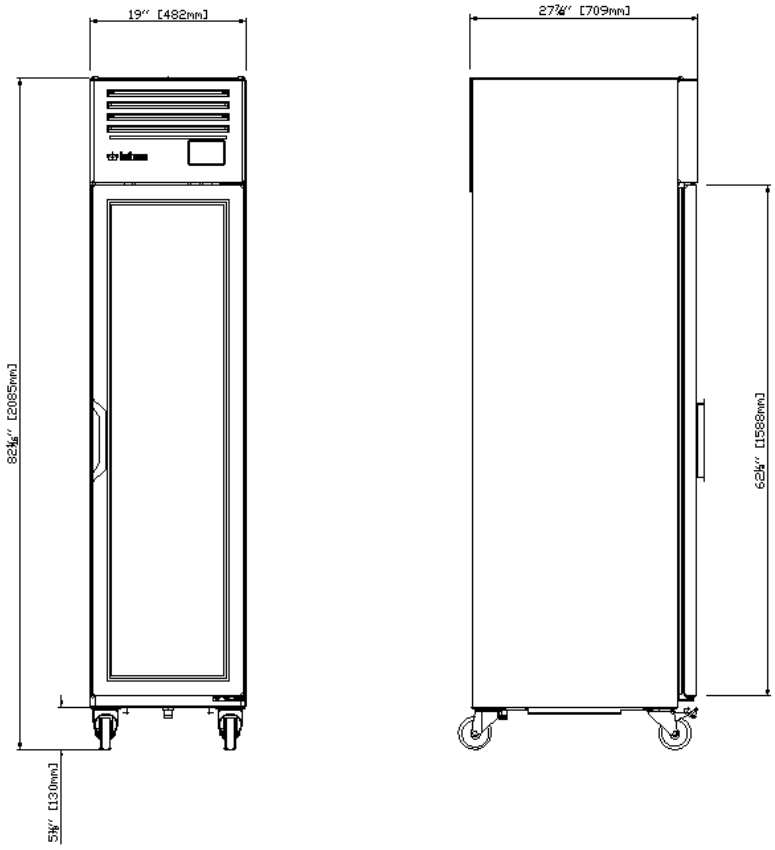

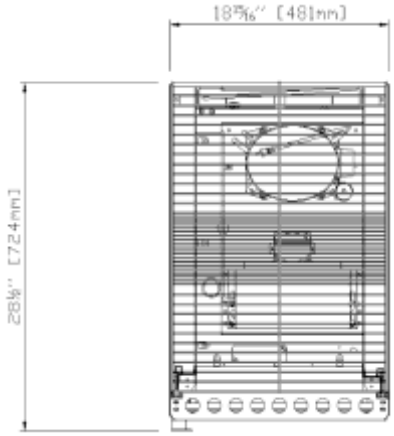

IRR-AGN300CR

Revision:01 Date: 04/27/2026 IRR-AGN300_600CR

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate Division
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599
www.infrico.us
sales@infrico.com

Project:_____

Location:_____


Item #:_____ Quantity:_____

Model #:_____

MODEL: IRR-AGN300CR
IRR-AGN600CR

Slimline Reach-in Refrigerators

ELEVATION	RIGHT VIEW	PLANT VIEW

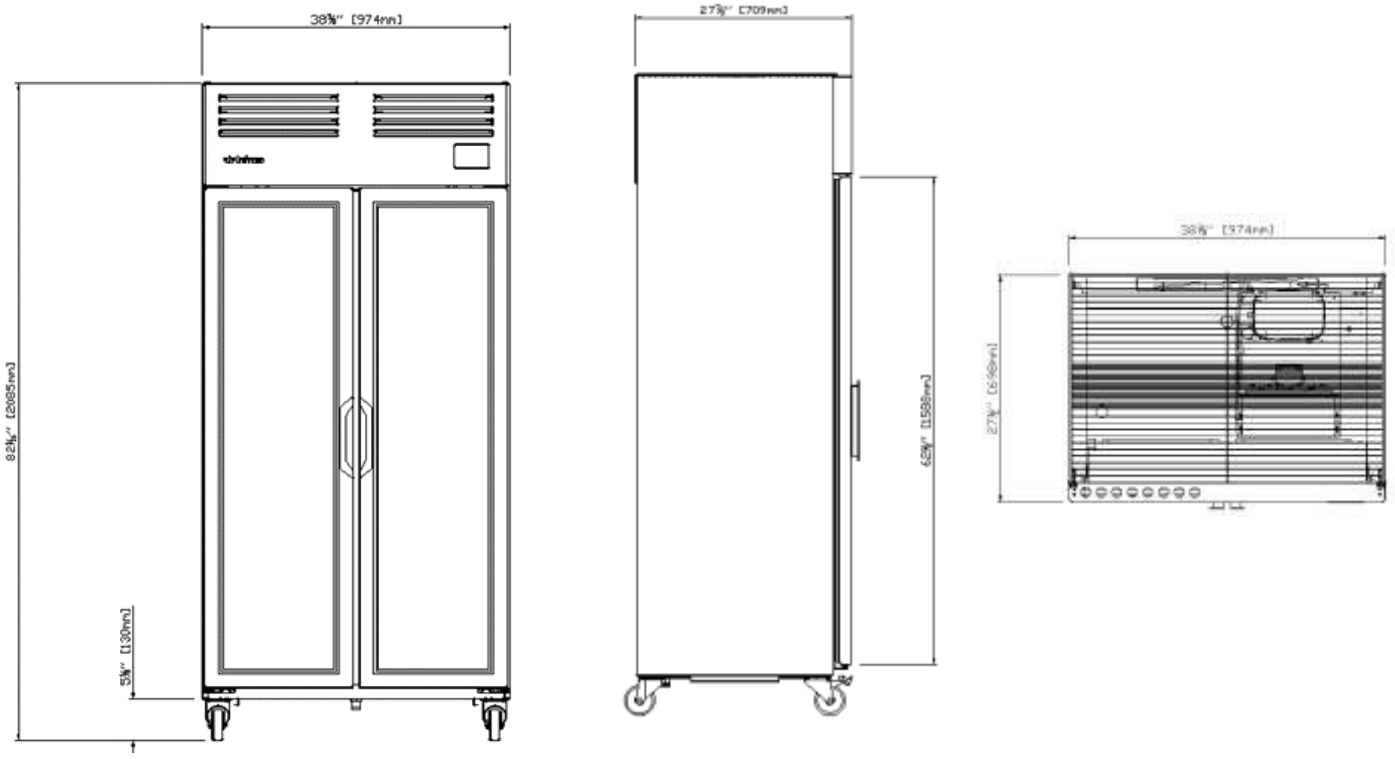

IRR-AGN600CR

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate División
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599
www.infrico.us
sales@infrico.com