



VACUUM PACKING MACHINE SU-520GP L 230/50-60/1

Tabletop model. 20m³/h. 555 mm.

P/N 1141115



FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE



SALES DESCRIPTION

555 mm sealing bar.

20 m³/h Busch vacuum pump.

Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 25-programme memory. Blocking option.
- ✓ "Pause" button.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with Automatic decompression.
- ✓ Stainless steel body and chamber. Long-shaped, deep-drawn chamber.
- ✓ Damped transparent lid of high durability polycarbonate.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.

INCLUDES

- ✓ Filling plate
- ✓ Bluetooth connectivity
- ✓ Inert gas flush (4 injectors).
- ✓ Printer connection

OPTIONAL

- ☐ Printer
- ☐ Vacuum packing pouches
- ☐ Vac-Norm external vacuum kit, containers and accessories
- ☐ Bag cutting kit
- ☐ Support for liquids
- ☐ Additional filling plates

ACCESSORIES

- ☐ Bag cutting kits
- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kits
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ Trolley for vacuum packing machines
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB Desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 20 m³/h

Pump capacity (60 Hz): 20 m³/h

Bar length: 555 mm

Total loading: 750 W

Vacuum pressure (maximum): 2 mbar

Electrical supply: 230 V / 50-60 Hz / 1 ~ (5.5 A)

Internal dimensions

- ✓ Width: 568 mm
- ✓ Depth: 431 mm
- ✓ Height: 215 mm

External dimensions (WxDxH)

- ✓ Depth: 552 mm
- ✓ Height: 513 mm (230V) / [v:dim_ext_alto_2] (120V)
- ✓ Width: 634 mm
- ✓ Depth: 552 mm
- ✓ Height: 513 mm

Net weight: 70.4 Kg

Noise level (1m.): 75 dB(A)

Background noise: 32 dB(A)

Crated dimensions

786 x 612 x 685 mm

Gross weight: 79 Kg






VACUUM PACKING MACHINE SU-520GP L 230/50-60/1

Tabletop model. 20m³/h. 555 mm.



P/N 1141115

FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE

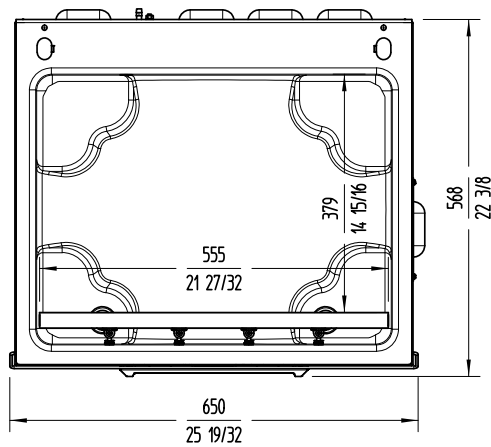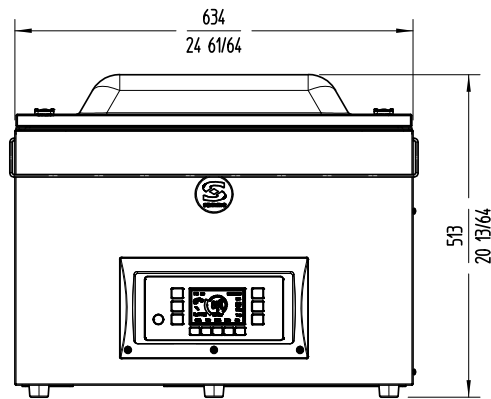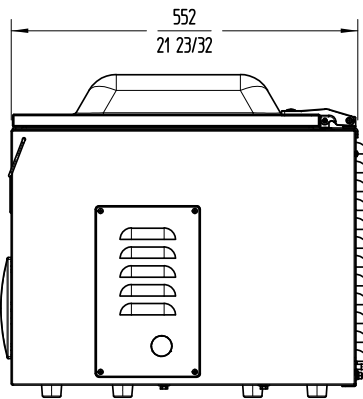

www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road

Troon Industrial Park

LE4 9LS - Leicester

uksales@sammic.com

Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet
updated 05/10/2022