Oasis

Non-Refrigerated Self-Service Case 34"D

Structural Concepts®
DELIVERING FRESH. ALWAYS.™

- **B37D** 35-5/8"L x 34-1/4"D x 82-1/4"H
- **B47D** 47-5/8"L x 34-1/4"D x 82-1/4"H



B37D

Included

- Casters (non-locking) w/ levelers
- One piece formed ABS plastic tub
- One year parts & labor warranty
- Rear wall spacer (removable to fit through door opening)
- Top light (LED 4000K)

Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Powder coated Silversan Black	• Laminate (stock/non-stock colors) • Powder coated (stock/non-stock colors) • Stainless steel
INTERIOR COLOR	• Powder coated Silversan Black	• Powder coated Designer White • Stainless steel
LOWER FRONT PANEL COLOR	• Powder coated Silversan Black	• Stainless steel (must choose stainless exterior)
REAR EXTERIOR COLOR	• Powder coated Silversan Black	• Stainless steel
BASE SUPPORT	• Casters (non-locking) w/ levelers	
END PANELS	• Full w/stainless steel mirror interior	• Cutaway w/ glass • None (synchronized defrost required)
COVER/CURTAIN	• None	[1] • Night curtain, retractable, non-locking • Removable solid security cover, locking • Roll-down security cover, locking
PRICE TAG MOLDING	• None	• Universal price tag molding (clear w/ open top)
REAR DOORS	• None (solid back panel)	• Rear loading hinged doors, locking
SHELVING	• Metal shelves (4), non-lighted	• Metal shelves (4), lighted (LED 4000K)
ELECTRICAL CONNECTION	• 6' Straight blade power cord	
MISCELLANEOUS		• Second year parts & labor warranty

Option Notes: 1 - One cover/curtain type per model


Oasis


Non-Refrigerated Self-Service Case 34"D

Structural Concepts®
DELIVERING FRESH. ALWAYS.™


Intended Environment:	Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
Zone	**Intended Product To Be Displayed**	**Warmest Avg Prod Temp ° F**
1	Packaged non-refrigerated products	Ambient

PLAN VIEW

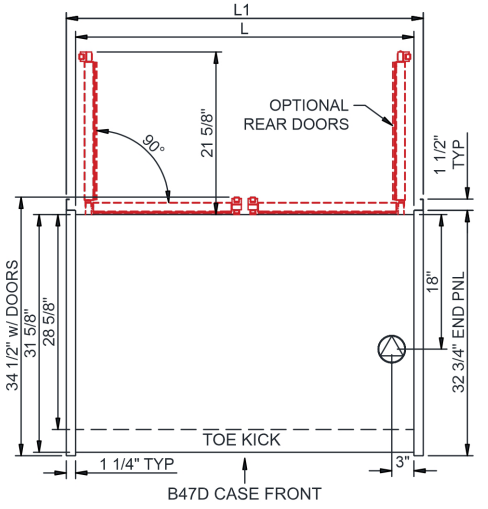

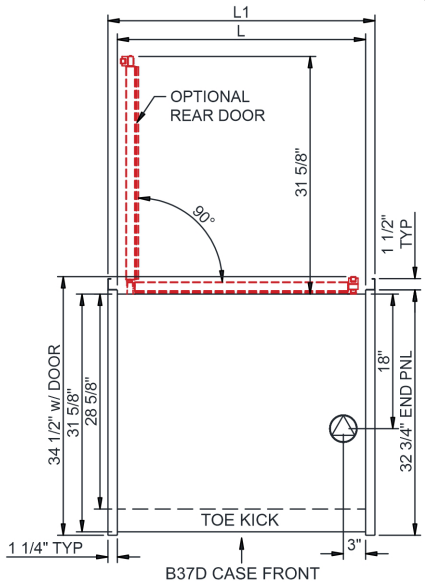

SIDE VIEW

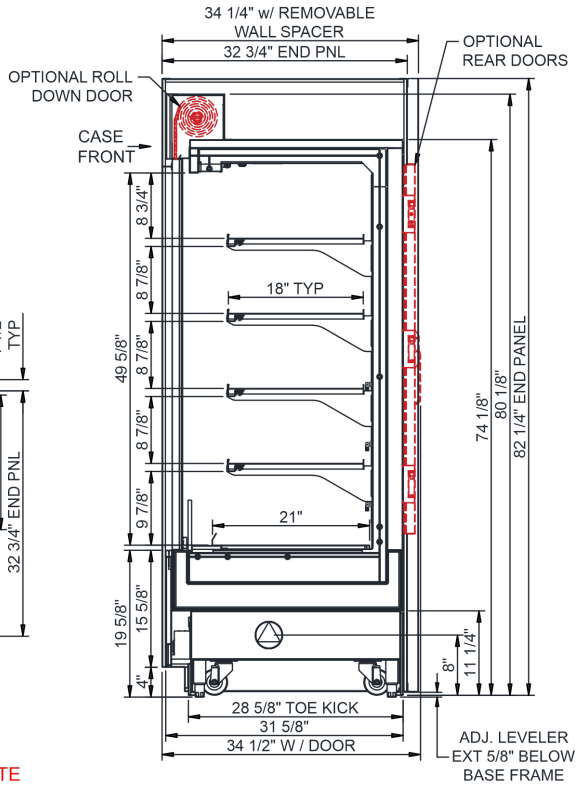

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH $\frac{3}{4}$" OR 1$\frac{1}{2}$" PVC TUBE).
REFRIGERATION LINE CONNECTION.
REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
SELF-CONTAINED CASE SERVICE ACCESS AREA.
DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
B37D	33.13	35.63	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	1.00	34	2+G	5-15P or L5-15P	N/A	N/A	N/A	650
B47D	45.13	47.63	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	1.00	48	2+G	5-15P or L5-15P	N/A	N/A	N/A	750

*** Does not include electric defrost on freezer models.

Regulatory Approvals:	
None	

DOE 2017 Energy Efficiency Compliant

Important Notes:

1) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
2) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
3) If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.

⚠ **WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Placement of Case

Consider where the display case will be positioned relative to walls, ceilings, HVAC vents, windows, and other equipment discharging warm air.

The 5′ - 10′ - 15′ Rule

Stay 5′ away from an exterior window

Direct sunlight increases the heat load on the front of the display resulting in the refrigeration system having to work harder and possible condensation on the case.

Remain 10′ away from HVAC ceiling vents

Air blowing on the front of the display interrupts the air curtain and causes product temperatures to increase.

Minimum 4″ clearance to walls & ceilings.
Refer to spec sheets & design guide for further information.

With service display cases that have a glass front, air blowing on the front glass causes condensation to develop.

Position the display 15′ away from exterior doors

Air drafts from the front exterior doors interrupt the air curtain, allowing warm air to penetrate the inside of the display, affecting product temperature.

