# R-SERIES

3-SECTION GLASS DOOR
PASS-THRU REFRIGERATOR

| | | | |
|---|---|---|---|
| Project Name: | Location: | | AIA #: |
| Item #: | Qty: | Model #: | SIS #: |

## R-SERIES - STAINLESS STEEL EXTERIOR & INTERIOR




Shown on optional casters


DRR Dynamic Response Refrigeration

*Shown on optional 6" casters*

## PLAN VIEW

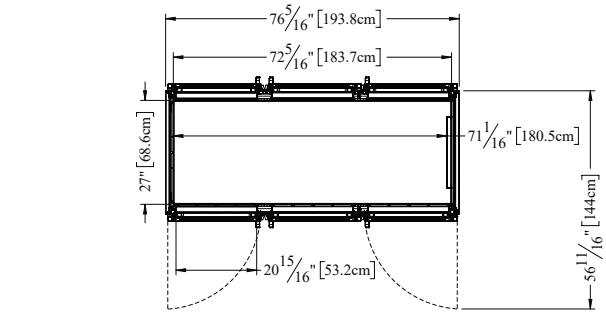



TOP VIEW

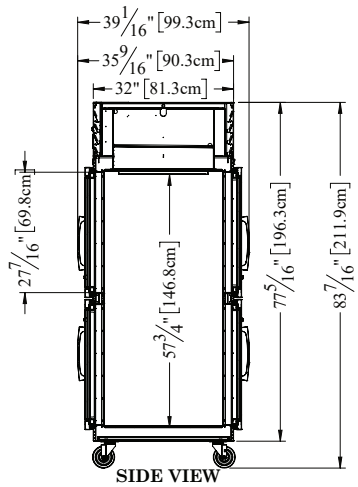


SIDE VIEW

RHT332NPUT-HHG

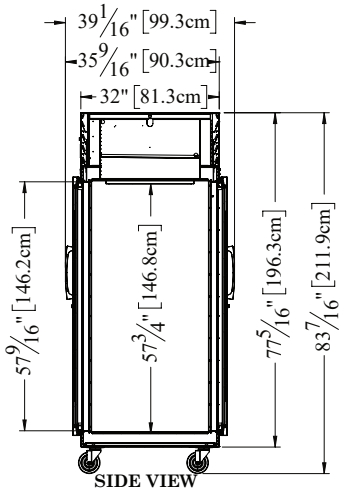


SIDE VIEW

RHT332NPUT-FHG

## SPECIFICATIONS

| | |
|---|---|
| *DIMENSIONAL DATA* | |
| Capacity cu. ft. | 76.3 (2159.2 L) |
| Length in. | 76-5/16 (193.8 cm) |
| Overall Depth in. | 39-1/16 (99.3 cm) |
| Overall Height in.[2] | 83-7/16 (211.9 cm) |
| *ELECTRICAL DATA* | |
| Horsepower[1] | 1-1/4 |
| Amps | 13.5 |
| Voltage | 115/60/1 |
| NEMA | 5-20P |
| *REFRIGERATION DATA* | |
| Refrigerant | R-290 |
| Charge Amount oz. | 4.5 (127.6 g) |
| BTU/HR | 5120 |

When ordering please specify:
Voltage, Hinging, and Options



NEMA 5-20P

1. Based on 90°F ambient & 20°F evaporator.
2. 12" top clearance preferred for optimum performance & service access.
*For additional voltage options contact factory.

Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).

ENERGY STAR® Listed Commercial Refrigerator
For full listing visit energystar.gov


2026 © Traulsen • 4401 Blue Mound Road | Fort Worth, TX 76106 • 1 (800) 825-8220 • www.traulsen.com

# R-SERIES

3-SECTION GLASS DOOR
PASS-THRU REFRIGERATOR

| | | | |
|---|---|---|---|
| Project Name: | Location: | | AIA #: |
| Item #: | Qty: | Model #: | SIS #: |

## ELEVATED PERFORMANCE

• Dynamic Response Refrigeration™: A coordinated system that combines the multi-patented Smart Control™ platform with Predictive Defrost™, a Thermostatic Expansion Valve, and a Variable-Speed Compressor to optimize temperature stability, recovery, and efficiency. The system adapts to workload demands to minimize downtime, while delivering critical alerts, power-loss tracking, and recovery data to support food safety.

• StayClear™ Condenser Coil: Front-facing, wide-fin design resists grease and debris buildup to ensure continuous airflow, improve efficiency, and extend compressor life

• Load-Sure™ Guard: Side-mounted air duct that protects proper airflow and facilitates proper product loading

• EZ-Clean™ Door Gaskets: Magnetic, snap-in design with chemical resistance and a single-channel profile that exposes debris for faster, more effective cleaning

• EZ-Clean Tray Racks (option): One-piece, stainless-steel design simplifies cleaning. Lightweight and fully removable for fast sanitation. Includes (2) pairs per section; available in 5, 6, 7, or 9 levels. Each level accommodates:

  • (1) 18" × 26" pan
  • (2) 14" × 18" pans
  • (2) 12" × 20" pans

## REFRIGERATION SYSTEM

• Self-contained, top-mounted system uses minimal GWP R-290 refrigerant

• System operates at 34-38°F (1.1-3.3°C) to maintain consistent, food-safe temperatures

• High humidity evaporator coil located outside the food zone; complete electro-deposition coating on coil

## CABINET CONSTRUCTION

• Stainless steel exterior and interior

• Exterior top, back, and bottom is constructed of heavy gauge galvanized steel

• Cabinet is insulated with an average of 2" (5.1 cm) thick high density, non-CFC foamed-in-place polyurethane

• A set of (4) 6" (15.2 cm) high legs

• 9' cord & plug provided

## DOORS

• Removable, plug cylinder locks

• Guaranteed for life cam-lift hinges

• Doors are self-closing with a stay-open feature

• Door hinges include a concealed switch that automatically activate interior LED lighting

## FACTORY-INSTALLED INTERIORS

• (3) adjustable, coated wire shelves per section supported on shelf pins

## FACTORY-INSTALLED OPTIONS

• #1 Type trayslides — Accommodate (1) 18" x 26" pan or (2) 14" x 18" pans; adjustable to 2" O.C.

• #4 Type trayslides — Accommodate up to (19) 18" x 26" pans

• Universal Type Trayslides — Accommodate (1) 18" x 26" pans, (2) 14" 20" pans, or (2) 12" x 20" pans; (4) pairs per half section

• Additional coated wire or optional stainless steel shelves

• Optional 208-230/115/60/1 or 208-230/60/1 voltage

• Kool Klad™ exterior laminate

• Set of (4) 4-1/8" (10.5 cm) casters; (2) with brakes, (2) without brakes

• Set of (4) 6" (15.2 cm) casters; (2) with brakes, (2) without brakes

• 4-1/2" high base; for use with standard legs

• 6" high kickplate; for use with standard legs

• Remote application available; consult factory

## WARRANTY

• Six-year parts and labor warranty

• Seven-year compressor parts warranty

| | | |
|---|---|---|
| **Approved by:** | **Approved by:** | **Date:** |


2026 © Traulsen • 4401 Blue Mound Road | Fort Worth, TX 76106 • 1 (800) 825-8220 • www.traulsen.com