



## Glo-Ray® Designer Dual Infrared Aluminium Strip Heaters with Lights

### Models:

GR2AL -18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

GR2AHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

Glo-Ray® Designer Aluminum Dual Infrared Strip Heaters allow side-by-side mounting of two warmers to provide a deeper holding area, keeping hot food at optimum serving temperatures. The lights illuminate and complement food perfectly. These modern front-of-the-house warmers have 3" spacers Standard with optional 6" spacers. Units are available in *Designer* colors to match most décors.

### Standard features

- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food
- Sturdy continuous aluminum housings eliminate sagging
- Widths from 21.5" to 87.5" (546 X 2223 mm)
- 14" (356 mm) *Designer* non-adjustable Stands Standard
- Available in a variety of models, configurations, colors and accessories to provide unlimited flexibility
- Designer colors and inset panels allow the unit to match surrounding décor\*
- Black corner caps and inset panels standard
- Standard coated shatter-resistant incandescent or optional halogen lights enhance product displays while safeguarding food from bulb breakage
- Optional sneeze guards
- Remote control installation is required - must chose RMB
- Additional reflector styles and lower wattage elements available, consult factory for more information

**NOTE:** Install Remote Box outside Heat Zone or damage will occur.



For operation, location and safety information, please refer to the Installation and Operating Manual.




**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350  
[www.hatcocorp.com](http://www.hatcocorp.com) | [customerservice@hatcocorp.com](mailto:customerservice@hatcocorp.com) | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#)

Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_

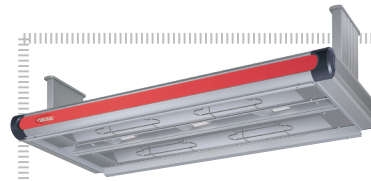

GR2AHL-36D with optional overhead mounts and optional Designer color Inset Panels (black Corner Caps Standard)

GR2AL-48D with Standard Designer non-adjustable stands and optional Designer color Inset Panels (black Corner Caps Standard)



### Options (available at time of purchase only)

#### Housing

- ☐ 15" (381 mm) ☐ 18" (457 mm)

Designer Color for Housing – Aluminum finish Standard\*

- ☐ Warm Red ☐ Black ☐ Gray Granite ☐ White Granite  
☐ Navy Blue ☐ Hunter Green ☐ Antique Copper

#### Inset Panel Designer Color – Black Standard\*

- ☐ Warm Red ☐ Black ☐ Gray Granite ☐ White Granite  
☐ Navy Blue ☐ Hunter Green ☐ Antique Copper

#### ☐ Dark Gray Corner Caps – Black Standard\*

#### ☐ No Control – Requires selection of RMB2-xx control

#### Remote Box in Designer Color – Aluminum finish Standard\*

- ☐ Warm Red ☐ Black ☐ Gray Granite ☐ White Granite  
☐ Navy Blue ☐ Hunter Green ☐ Antique Copper

#### Sneeze Guards

- ☐ 7.5" (191 mm) – One Side ☐ 7.5" (191 mm) – Two Sides  
☐ 14" (356 mm) – One Side ☐ 14" (356 mm) – Two Sides

#### Designer Non-Adjustable Stands – 14" (356 mm) Designer Stand Standard

- ☐ 10" (254 mm) ☐ 12" (305 mm) ☐ 16" (406 mm)

Designer Color – Aluminum finish Standard\*

- ☐ Warm Red ☐ Black ☐ Gray Granite ☐ White Granite  
☐ Navy Blue ☐ Hunter Green ☐ Antique Copper

#### ☐ Overhead Mounts 4" (102 mm) in lieu of Standard 14" (356 mm) Designer Stands

Designer Color – Aluminum finish Standard\*

- ☐ Warm Red ☐ Black ☐ Gray Granite ☐ White Granite  
☐ Navy Blue ☐ Hunter Green ☐ Antique Copper

#### ☐ 60 Watt Halogen Bulb in lieu of standard Display Light

#### ☐ No Bulbs

#### ☐ Extra Lamps – Installed (max. two per ft. less one – one per ft. is standard)

#### Extended Power (Electrical) Leads

- ☐ 1'-5' (305-1525 mm) ☐ 6'-10' (1829-3048 mm)  
☐ 11'-15' (3352-4572 mm) ☐ 16'-20' (4877-6096 mm)

### Accessories

Chef LED Light Bulb – Bulbs must be rotated down 120V

- ☐ 3000K Warm halogen ☐ 4000K Cool fluorescent

230V – CE for input voltages above 200V

- ☐ 3000K Warm halogen ☐ 4000K Cool fluorescent

\*Non-standard color are non-returnable






# Glo-Ray® Infrared Designer Dual Aluminum Strip Heaters with Lights

Models: GR2AL -18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

GR2AHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

## GR2AL-D and GR2AHL-D

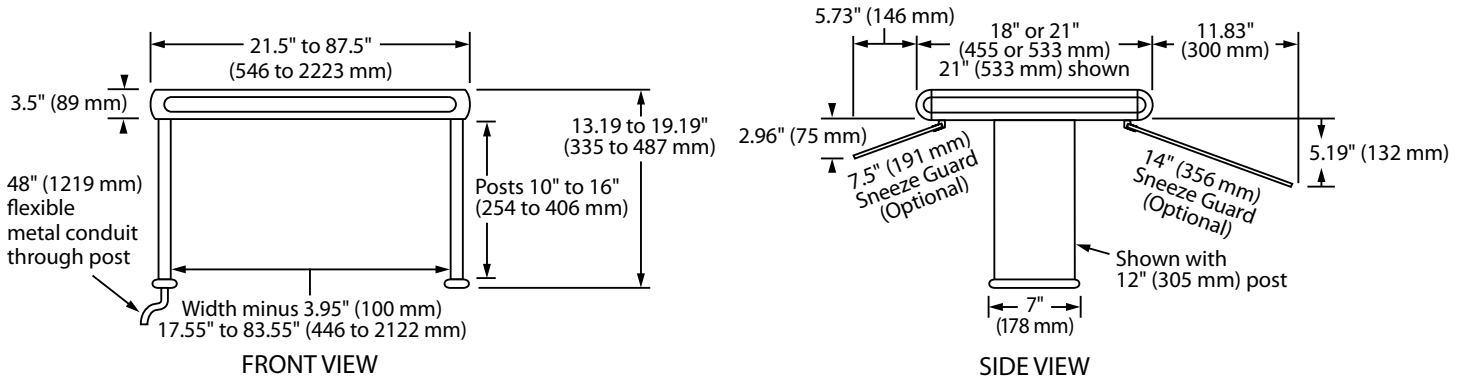

## SPECIFICATIONS

### Glo-Ray® Infrared Designer Aluminum Strip Heaters with Lights

#### Dimensions (without Non-Adjustable Stands)

21.5" - 87.5" W x 18.0"-21.0" H x 3.5" D (546 - 2223 x 455-533 mm x 89 mm)

The shaded areas contain electrical information for International models

| Standard Watt |                           |           |         |                                  | High Watt  |                           |           |           |                                  | Both Models     |                 |
|---------------|---------------------------|-----------|---------|----------------------------------|------------|---------------------------|-----------|-----------|----------------------------------|-----------------|-----------------|
| Model         | Volts single phase        | Watt      | Amps    | Approx. Ship Weight <sup>▲</sup> | Model      | Volts single phase        | Watt      | Amps      | Approx. Ship Weight <sup>▲</sup> | Number of Bulbs | Width           |
| GR2AL-18D     | 120                       | 620       | 5.2     | 28 lbs. (13 kg)                  | GR2AHL-18D | 120                       | 820       | 6.8       | 28 lbs. (13 kg)                  | 2               | 21.5" (546 mm)  |
|               | 120/208                   |           | 3.4     |                                  |            | 120/208                   |           | 4.4       |                                  |                 |                 |
|               | 120/240                   |           | 3.1     |                                  |            | 120/240                   |           | 3.9       |                                  |                 |                 |
|               | 220-230 (CE) <sup>‡</sup> | 600-656   | 2.7-2.9 |                                  |            | 220-230 (CE) <sup>‡</sup> | 801-876   | 3.6-3.8   |                                  |                 |                 |
|               | 230-240 (CE) <sup>‡</sup> | 569-620   | 2.5-2.6 |                                  |            | 230-240 (CE) <sup>‡</sup> | 752-820   | 3.3-3.4   |                                  |                 |                 |
| GR2AL-24D     | 120                       | 820       | 6.8     | 32 lbs. (15 kg.)                 | GR2AHL-24D | 120                       | 1120      | 9.3       | 32 lbs. (15 kg.)                 | 2               | 27.5" (699 mm)  |
|               | 120/208                   |           | 4.4     |                                  |            | 120/208                   |           | 5.8       |                                  |                 |                 |
|               | 120/240                   |           | 3.9     |                                  |            | 120/240                   |           | 5.2       |                                  |                 |                 |
|               | 220-230 (CE) <sup>‡</sup> | 801-876   | 3.6-3.8 |                                  |            | 220-230 (CE) <sup>‡</sup> | 1101-1204 | 5.0-5.2   |                                  |                 |                 |
|               | 230-240 (CE) <sup>‡</sup> | 752-820   | 3.3-3.4 |                                  |            | 230-240 (CE) <sup>‡</sup> | 1028-1120 | 4.5-4.7   |                                  |                 |                 |
| GR2AL-30D     | 120                       | 1020      | 8.5     | 35 lbs. (16 kg.)                 | GR2AHL-30D | 120                       | 1440      | 12.0      | 35 lbs. (16 kg.)                 | 2               | 33.5" (851 mm)  |
|               | 208                       |           | 5.3     |                                  |            | 208                       |           | 7.3       |                                  |                 |                 |
|               | 240                       |           | 4.8     |                                  |            | 240                       |           | 6.5       |                                  |                 |                 |
|               | 220-230 (CE) <sup>‡</sup> | 1001-1094 | 4.6-4.8 |                                  |            | 220-230 (CE) <sup>‡</sup> | 1421-1552 | 6.5-6.7   |                                  |                 |                 |
|               | 230-240 (CE) <sup>‡</sup> | 936-1020  | 4.1-4.3 |                                  |            | 230-240 (CE) <sup>‡</sup> | 1322-1440 | 5.7-6.0   |                                  |                 |                 |
| GR2AL-36D     | 120                       | 1330      | 11.1    | 40 lbs. (19 kg.)                 | GR2AHL-36D | 120                       | 1780      | 14.8      | 40 lbs. (19 kg.)                 | 3               | 39.5" (1003 mm) |
|               | 120/208                   |           | 7.0     |                                  |            | 120/208                   |           | 9.2       |                                  |                 |                 |
|               | 120/240                   |           | 6.3     |                                  |            | 120/240                   |           | 8.2       |                                  |                 |                 |
|               | 220-230 (CE) <sup>‡</sup> | 1301-1423 | 5.9-6.2 |                                  |            | 220-230 (CE) <sup>‡</sup> | 1751-1913 | 8.0-8.3   |                                  |                 |                 |
|               | 230-240 (CE) <sup>‡</sup> | 1221-1330 | 5.3-5.5 |                                  |            | 230-240 (CE) <sup>‡</sup> | 1635-1780 | 7.1-7.4   |                                  |                 |                 |
| GR2AL-42D     | 120                       | 1530      | 12.8    | 46 lbs. (21 kg.)                 | GR2AHL-42D | 120 <sup>★</sup>          | 2080      | 17.3      | 46 lbs. (21 kg.)                 | 3               | 45.5" (1156 mm) |
|               | 120/208                   |           | 8.0     |                                  |            | 120/208                   |           | 10.6      |                                  |                 |                 |
|               | 120/240                   |           | 7.1     |                                  |            | 120/240                   |           | 9.4       |                                  |                 |                 |
|               | 220-230 (CE) <sup>‡</sup> | 1501-1641 | 6.8-7.1 |                                  |            | 220-230 (CE) <sup>‡</sup> | 2051-2241 | 9.3-9.7   |                                  |                 |                 |
|               | 230-240 (CE) <sup>‡</sup> | 1405-1530 | 6.1-6.4 |                                  |            | 230-240 (CE) <sup>‡</sup> | 1911-2080 | 8.3-8.7   |                                  |                 |                 |
| GR2AL-48D     | 120                       | 1840      | 15.3    | 47 lbs. (22 kg.)                 | GR2AHL-48D | 120 <sup>★</sup>          | 2440      | 20.3      | 47 lbs. (22 kg.)                 | 4               | 51.5" (1308 mm) |
|               | 120/208                   |           | 9.7     |                                  |            | 120/208                   |           | 12.6      |                                  |                 |                 |
|               | 120/240                   |           | 8.7     |                                  |            | 120/240                   |           | 11.2      |                                  |                 |                 |
|               | 220-230 (CE) <sup>‡</sup> | 1802-1969 | 8.2-8.6 |                                  |            | 220-230 (CE) <sup>‡</sup> | 2402-2625 | 10.9-11.4 |                                  |                 |                 |
|               | 230-240 (CE) <sup>‡</sup> | 1690-1840 | 7.3-7.7 |                                  |            | 230-240 (CE) <sup>‡</sup> | 2240-2440 | 9.7-10.2  |                                  |                 |                 |
| GR2AL-54D     | 120 <sup>★</sup>          | 2090      | 17.4    | 50 lbs. (23 kg.)                 | GR2AHL-54D | 120 <sup>★</sup>          | 2740      | 22.8      | 50 lbs. (23 kg.)                 | 4               | 57.5" (1460 mm) |
|               | 120/208                   |           | 10.9    |                                  |            | 120/208                   |           | 14.0      |                                  |                 |                 |
|               | 120/240                   |           | 9.7     |                                  |            | 120/240                   |           | 12.4      |                                  |                 |                 |
|               | 220-230 (CE) <sup>‡</sup> | 2052-2243 | 9.3-9.7 |                                  |            | 220-230 (CE) <sup>‡</sup> | 2702-2953 | 12.3-12.8 |                                  |                 |                 |
|               | 230-240 (CE) <sup>‡</sup> | 1920-2090 | 8.3-8.7 |                                  |            | 230-240 (CE) <sup>‡</sup> | 2516-2740 | 10.9-11.4 |                                  |                 |                 |

★ Must order with an RMB2 for Canada.

▲ Shipping weight includes packaging, and does not include RMB (Remote Box), must order an RMB.

‡ CE approved units for 220-230V utilize a 220V heating system; 230-240V CE units utilize a 240V heating system.

✓ 120 volt models with infinite controls not available.

**NOTE:** Units rated for 120/208 or 120/240 volt are manufactured with a 120 volt circuit for the incandescent lights and a 208 or 240 volt circuit for the heating element(s).

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[customerservice@hatcocorp.com](mailto:customerservice@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)



# Glo-Ray® Infrared Designer Dual Aluminum Strip Heaters with Lights

Models: GR2AL -18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

GR2AHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

## SPECIFICATIONS

### Glo-Ray® Infrared Designer Aluminum Strip Heaters with Lights

#### Dimensions (without Non-Adjustable Stands)

21.5" - 87.5" W x 18.0"-21.0" D x 3.5" H (546 - 2223 mm x 455-533 mm x 89 mm)

The shaded areas contain electrical information for international models

| Standard Watt            |                           |      |           |                                  | High Watt                 |                           |           |           |                                  | Both Models     |                 |
|--------------------------|---------------------------|------|-----------|----------------------------------|---------------------------|---------------------------|-----------|-----------|----------------------------------|-----------------|-----------------|
| Model                    | Volts single phase        | Watt | Amps      | Approx. Ship Weight <sup>▲</sup> | Model                     | Volts single phase        | Watt      | Amps      | Approx. Ship Weight <sup>▲</sup> | Number of Bulbs | Width           |
| GR2AL-60D                | 120 <sup>★</sup>          | 2400 | 20        | 55 lbs. (25 kg.)                 | GR2AHL-60D                | 120 <sup>★</sup>          | 3100      | 25.8      | 55 lbs. (25 kg.)                 | 5               | 63.5" (1613 mm) |
|                          | 120/208                   |      | 12.6      |                                  |                           | 120/208                   |           | 16.0      |                                  |                 |                 |
|                          | 120/240                   |      | 11.3      |                                  |                           | 120/240                   |           | 14.2      |                                  |                 |                 |
|                          | 220-230 (CE) <sup>‡</sup> |      | 10.7-11.2 |                                  |                           | 220-230 (CE) <sup>‡</sup> |           | 13.9-14.5 |                                  |                 |                 |
|                          | 230-240 (CE) <sup>‡</sup> |      | 9.6-10.0  |                                  |                           | 230-240 (CE) <sup>‡</sup> |           | 12.4-12.9 |                                  |                 |                 |
| GR2AL-66D                | 120 <sup>★</sup>          | 2620 | 21.8      | 67 lbs. (31 kg.)                 | GR2AHL-66D <sup>↗</sup>   | 120 <sup>★</sup>          | 3420      | 28.5      | 67 lbs. (31 kg.)                 | 5               | 69.5" (1765 mm) |
|                          | 120/208                   |      | 13.7      |                                  |                           | 120/208                   |           | 17.5      |                                  |                 |                 |
|                          | 120/240                   |      | 12.2      |                                  |                           | 120/240                   |           | 15.5      |                                  |                 |                 |
|                          | 220-230 (CE) <sup>‡</sup> |      | 11.7-12.2 |                                  |                           | 220-230 (CE) <sup>‡</sup> |           | 15.3-16.0 |                                  |                 |                 |
|                          | 230-240 (CE) <sup>‡</sup> |      | 10.5-11.0 |                                  |                           | 230-240 (CE) <sup>‡</sup> |           | 13.7-14.3 |                                  |                 |                 |
| GR2AL-72D                | 120 <sup>★</sup>          | 2910 | 24.3      | 75 lbs. (35 kg.)                 | GR2AHL-72D <sup>↗</sup> Ⓢ | 120 <sup>★</sup>          | 3810      | 31.8      | 75 lbs. (35 kg.)                 | 6               | 75.5" (1918 mm) |
|                          | 120/208                   |      | 15.3      |                                  |                           | 120/208                   |           | 19.6      |                                  |                 |                 |
|                          | 120/240                   |      | 13.6      |                                  |                           | 120/240                   |           | 17.4      |                                  |                 |                 |
|                          | 220-230 (CE) <sup>‡</sup> |      | 13.0-13.5 |                                  |                           | 220-230                   |           | 17.1-17.8 |                                  |                 |                 |
|                          | 230-240 (CE) <sup>‡</sup> |      | 11.6-12.1 |                                  |                           | 230-240 (CE) <sup>‡</sup> |           | 15.2-15.9 |                                  |                 |                 |
| GR2AL-84D <sup>↖</sup> Ⓢ | 120 <sup>★</sup>          | 3420 | 28.5      | 82 lbs. (38 kg.)                 | GR2AHL-84D <sup>↖</sup> Ⓢ | —                         | —         | —         | 82 lbs. (38 kg.)                 | 7               | 87.5" (2223 mm) |
|                          | 120/208                   |      | 17.9      |                                  |                           | 120/208                   | —         | 23.2      |                                  |                 |                 |
|                          | 120/240                   |      | 16.0      |                                  |                           | 120/240                   | 4520      | 20.6      |                                  |                 |                 |
|                          | 220-230 (CE) <sup>‡</sup> |      | 15.2-15.9 |                                  |                           | 220-230                   | 4453-4868 | 20.2-21.2 |                                  |                 |                 |
|                          | 230-240 (CE) <sup>‡</sup> |      | 13.7-14.3 |                                  |                           | 230-240                   | 4152-4520 | 18.1-18.8 |                                  |                 |                 |

★ Must order with an RMB2 for Canada.

▲ Shipping weight includes packaging, and does not include RMB (Remote Box), must order an RMB.

‡ CE approved units for 220-230V utilize a 220V heating system; 230-240V CE units utilize a 240V heating system.

↗ 120 volt models with infinite controls not available.

Ⓢ 120 volt models contain tandem (end-to-end) elements that may be individually controlled.

Ⓢ Remote Control Box required

**NOTE:** Units rated for 120/208 or 120/240 volt are manufactured with a 120 volt circuit for the incandescent lights and a 208 or 240 volt circuit for the heating element(s).

## SWITCH LOCATION

Remote only

## TOGGLE SWITCH

Amps: Max. 15 amps

## INFINITE SWITCH

Max. 12.2 amps

## LEADS

5' (1524 mm) through 1/2" conduit in Stand cavity is standard

## ELEMENT HEIGHT REQUIREMENTS

(Refer to the Installation section of the Manual on the Hatco website)

or follow this file path: [www.hatcocorp.com](http://www.hatcocorp.com) > Resources > Choose Remote Box

With 3" (76 mm) or 6" (152 mm) Spacer

### Standard Watt

Height: 10"-14" (254-356 mm)

Target Width: 18" (457 mm)

### High Watt

Height: 14"-18" (356-457 mm)

Target Width: 24" (610 mm)

## PRODUCT SPECS

### Designer Infrared Designer Dual Aluminum Foodwarmers with Lights

The Infrared Designer Dual Aluminum Foodwarmer with Lights shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A. The foodwarmer shall be a Glo-Ray model ... , rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width. The Glo-Ray shall consist of an aluminum housing and include as standard equipment 14" (356 mm) Designer Stands. The infrared heating element shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation.

## REMOTE CONTROL ENCLOSURES

Must order one RMB control box per Strip Heater - If RMB2 is used, multiple warmers can be controlled from one box.



[Click here to download the RMB Choose Remote Box Excel Spreadsheet](#)

or follow this file path: [www.hatcocorp.com](http://www.hatcocorp.com) > Resources > Choose Remote Box

| Model (Series) | Width            | Switches                                                                       |
|----------------|------------------|--------------------------------------------------------------------------------|
| RMB-3          | 6" (150 mm)      | 2 toggles                                                                      |
| RMB-7          | 9.375" (239 mm)  | 2 toggles with indicator lights<br>or 1 toggle, 1 infinite and indicator light |
| RMB-14         | 14.375" (366 mm) | 2 Infinities with pilot lights                                                 |

Options shall include Designer Color Housing, Designer Color Inset Panel, Designer non-adjustable Stands in various sizes (available in Designer Colors), Overhead Mounts (available in Designer Colors), dark gray corner caps, Sneeze Guards, no Control, Halogen Bulb(s), no Bulbs, Extra Lamps, Extended Electrical Power Leads. All Designer Colors are anti-microbial paint.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[customerservice@hatcocorp.com](mailto:customerservice@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)