



ICEU220

Features

- Space-saving 610 mm wide undercounter design.
- Produces up to 114 kg of ice per day.
- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- Pure Ice® exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Ice-O-Matic's optional water filtration system provides protection against unpleasant tastes, odors and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Longest warranty in the industry. Purchase an Ice-O-Matic water filter with your cube ice maker, replace the filter every six months, and the evaporator warranty is extended to 7 years parts and labor (available in the U.S. and Canada only).
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.

Options & Accessories

WATER FILTERS			
Ice Machine Model	Manifold		Inline
	System	Replacement	System
ICEU220	IFQ1	IOMQ (I)	IFI4C / IFI8C
ICEU225			
ICEU226			

Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and *labor coverage*.

- Three years **Parts** and **Labor**.
- Five years **Parts** coverage on the evaporator and compressor.
- Seven years **Parts** and **Labor** on the evaporator when you purchase an Ice-O-Matic water filter with your cube ice maker and replace the filter every six months (available in the U.S. and Canada only).

Ice Form



CUBE

FULL CUBE DIMENSIONS	
W x D x H (mm)	22 x 22 x 22
HALF CUBE DIMENSIONS	
W x D x H (mm)	10 x 22 x 22

Space-Saving Solutions



- Front air discharge design for compact spaces.
- Low profile top saves counter space.
- Stores up to 34 kg of ice.
- Easy front access to ice.
- Available with an air-cooled or water-cooled condenser.





Air and Water Cooled

- A. Ice maker water in, 3/8" FPT.
- B. Bin and ice maker drain, 3/4" FPT.
- C. Hole for electrical connections, 7/8" (Cord on 115).
- D. Condenser water in, 3/8" FPT (water cooled units only).
- E. Condenser water out, 1/2" FPT (water cooled units only).

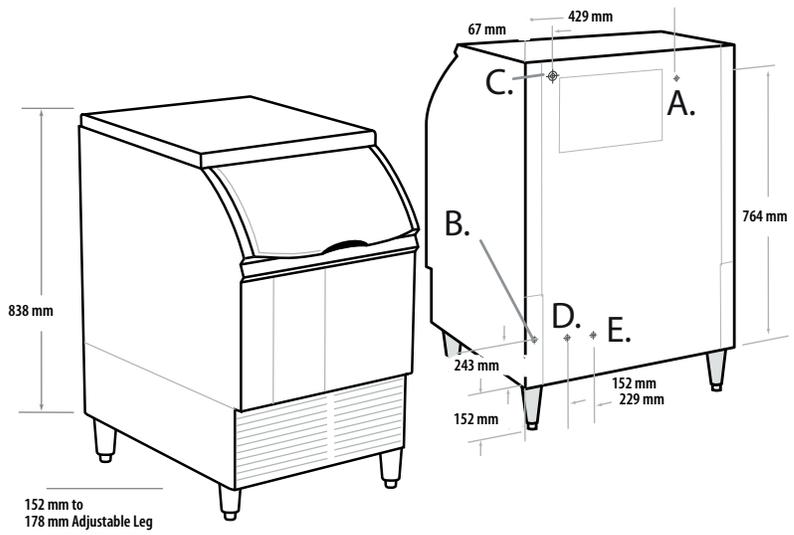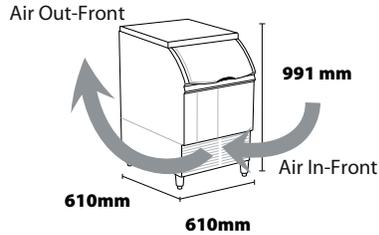

Front & Rear View

ICEU220/225/226 SELF CONTAINED CUBE ICE MAKER

Operating Requirements

	MINIMUM	MAXIMUM	
		60 Hz	50Hz
Ambient Temp. Range Air	10°C	38°C	43°C
Water Temp.	4.4°C		
Water Pressure	1.4 BAR	4.1 BAR	

Dimensions

ALL MODELS	
W x D x H (mm)	610 x 610 x 991

Specifications

Model Number	Cond. Unit	Ice Production per 24hrs		Water Usage liters per 45 kg of Ice 32°C air/21°C water		kWH Used per 45 kg of ice @ 32°C air/ 21°C water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size
		21°C air/ 10°C water kg	32°C air/ 21°C water kg	Potable	Condenser				
ICEU220A ★	Air	108	80	115	-	8.8	115/60/1	11.9	15
ICEU220W	Water	114	88	139	662	6.6		8.9	
ICEU225A	Air	96	65	123	-	8.8	230/50/1	4.9	16
ICEU225W	Water	95	79	138	590	6.3		4.1	
ICEU226A	Air	110	76	115	-	8.5	208-230/60/1	6.0	15
ICEU226W	Water	105	87	137	632	6.6		4.4	

NOTES:

Number of Wires: 3 (including ground)
 Approx. Shipping Weight kg: ICEU220A 73 • ICEU220W 73 • ICEU225A 73 • ICEU225W 73 • ICEU226A 73 • ICEU226W 73
 Refrigerant Type: R404A

★ENERGY STAR qualified machine. Please see our website www.iceomatic.com for the latest list of ENERGY STAR qualified machines and available rebates