SERV-WARE™ Product Spec Sheet

Range with Griddle

Item #
Project :
Qty :

Model No. SGR-6B-24G



SGR-6B-24G

Features:

- SGR-6B-24G - 6 Open top burners, 24” griddle, 2 ovens
- 30,000 BTU per open top burners
- 31,000 BTU per oven with U-shaped burner
- Fully welded frame for stability
- Stainless steel front, sides and back riser
- Covered pilot and burner covers to prevent clogging from spillage
- Durable stainless steel pilot
- Easily removable heavy duty cast grates/12” x 12”
- Pull out crumb tray with rounded edges to prevent heat transfer
- Casters installed
- Full size sheet pan fits side-to-side or front-to-back
- Oven thermostat adjusts from 250° to 550° F
- 2 Oven racks and 4 rack positions
- Built for natural gas and supplied with LP conversion kit

Warranty Info:

One Year

- Parts & Labor on entire unit.
- Valid in United States.
- Valid for commercial use only.

Revised 10/23/2026

SGR-6B-24G


SERV-WARE™
www.servware.com
Phone:(800).768.5953
Fax:(800).976.1299

Copyright © 2026 Serv-Ware Products LLC

SGR-6B-24G Range with Griddle

SERV-WARE™

Item #
Project :
Qty :

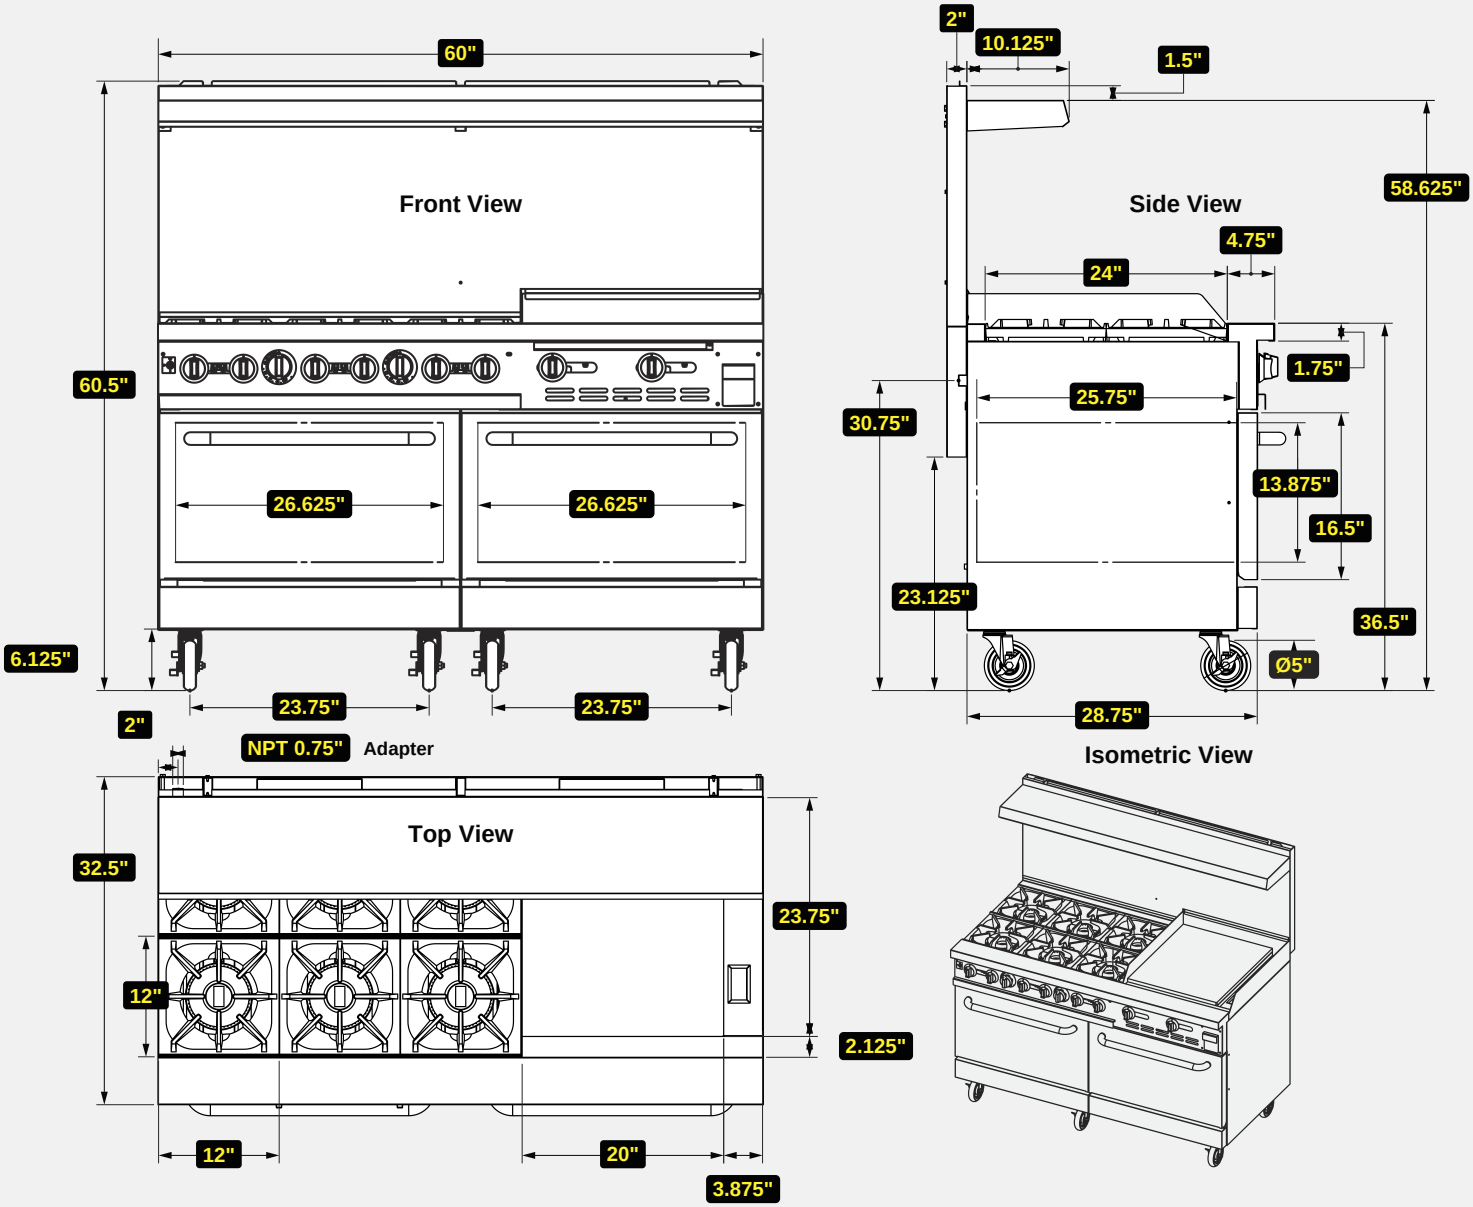

Technical Information:

MODEL #	DESCRIPTION	DIMENSIONS (W x D x H)	WEIGHT/LBS. (Shipping)
SGR-6B-24G	6 Burner w/ 24" Griddle + 2 Oven	60" W x 32.5" D x 60.5" H	865 lbs.

CONSTRUCTION

Stainless steel front, sides, back riser, high shelf, oven handle and bullnose. High temperature burner knobs with set screw. Casters installed. Porcelain door liner and oven bottom.

COOKING

Temperature Range	250°F – 550°F
Gas Line	¾
W.C. for Natural Gas	4 in.
W.C. for LP	10 in.

Intertek Intertek

Prop. 65 Warning for California Residents

WARNING: This product may contain chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

SERV-WARE™

Copyright © 2026 Serv-Ware Products LLC

Phone:(800).768.5953
Fax:(800).976.1299
www.servware.com