



GAS BOILING TOPS



G3121 Boiling Top

KEY FEATURES

- Energy efficient, high performance 5.3kW burners
 - *Quick heat up, reduced waiting time*
- Semi-sealed, pressed stainless steel hob
 - *Easy to remove and keep clean*
- Individual cast iron pan supports
 - *Long-lasting and robust*
- Mounted upon adjustable legs
 - *Can be installed upon any suitable surface*
- Laser-etched control icons
 - *Permanent, indelible markings*

MODELS and ACCESSORIES

G3121 Six burner boiling top

G3124 Four burner boiling top

- Fully integrated extended flue
- Splashplate and plateshelf (*not for use with extended flue*)
- Lift-off fryplate
- Suiting kit

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.


Install unit on a level, fireproof surface in a well-lit, draught free position. A clearance of 150mm should be observed between appliance and any combustible wall. Please consult the appliance installation manual for further details.





GAS BOILING TOPS

MODEL DIMENSIONS (in mm)

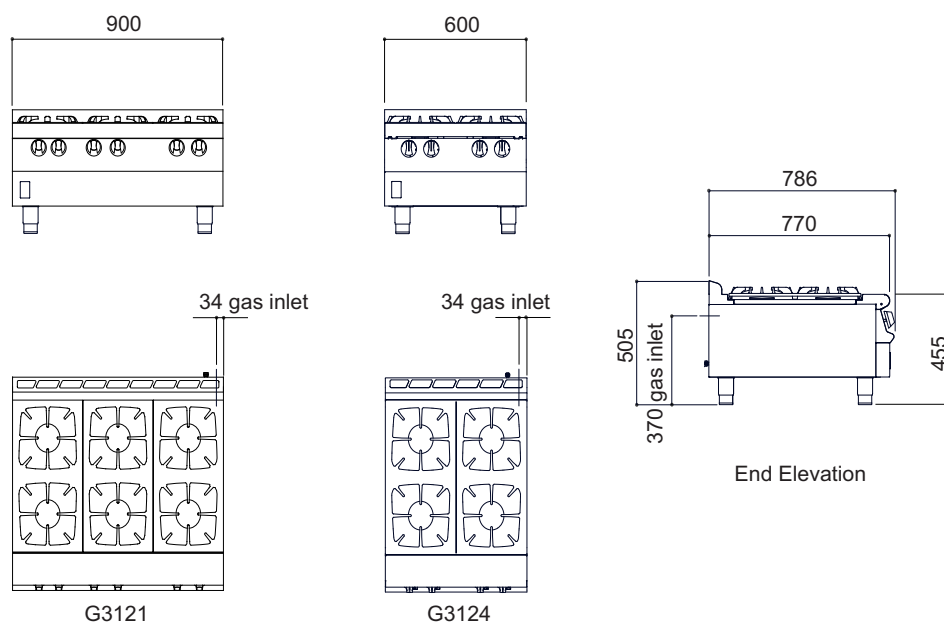

SPECIFICATION DETAILS

	G3121	G3124
Total rating * (natural and propane - kW)	31.8	21.2
Total rating * (natural and propane - btu/hr)	119,400	79,600
Inlet size (natural and propane)	3/4" BSP	3/4" BSP
Flow rate - natural (m ³ /hr)	3.30	2.20
Flow rate - propane (kg/hr)	2.30	1.60
Inlet pressure (natural and propane - mbar)	20 / 37	20 / 37
Operating pressure (natural and propane - mbar)	15 / 37	15 / 37
Hob burner rating * (natural and propane - kW)	5.3 x 6	5.3 x 4
Hob burner rating * (natural and propane - btu/hr)	19,900 x 6	19,900 x 4
Weight (kg)	75	54
Packed weight (kg)	83	60

Note: * denotes gross rating value