

Culino 60E Static Jacketed Kettle

Model – Culino 60E (4215203)

FEATURES

- Culino static jacketed kettle
- Electric heated version
- 316 Stainless steel bowl
- Flat panel digital controls
- Food temperature control (option)
- Multifunction timer (option)
- Automatic measured water filling (option)
- Electric tilting
- Measuring stick
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories




TECHNICAL DATA

Net Volume	60L	Electrical	Power 12 kW
Spare Volume	8 L		Voltage 400-415V,
Gross Volume	68 L		3P+N+E 50/60Hz
Dimensions			AMP 20A
Width	1047mm	Total Heat	12kW
Height	1039mm	Load	Latent 0.6 kW,
Depth	743mm		Sensible 2.6 kW
Connections		Waste	By kitchen
Water	Cold ø15mm		contractor
	Hot ø10mm	Nett Weight	179 kg

NOTE - Mandatory installation kit required for all installations, options are:

- Single kettle surface – 4215837
- Single kettle subsurface – 4215838
- Group kettle surface – 4215845
- Group kettle subsurface - 4215846

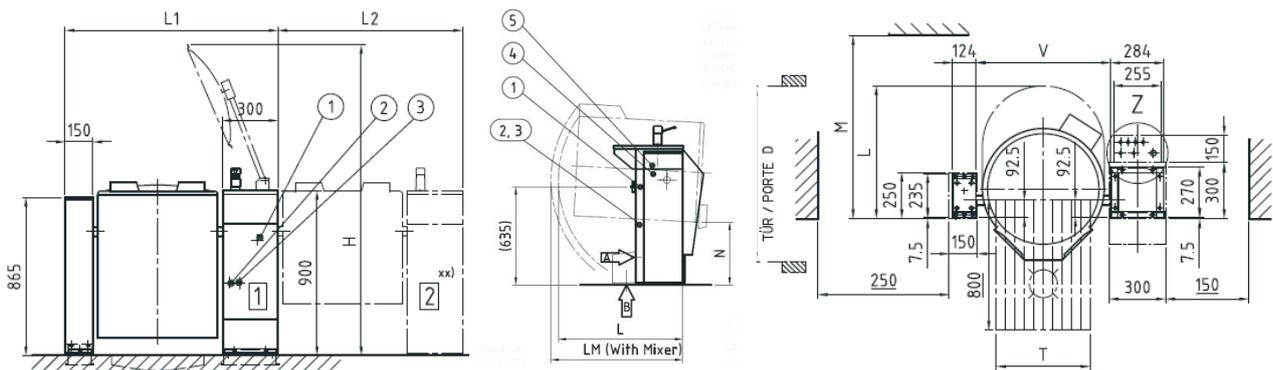

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

- (1) Electrical connection
- (2) Cold water connection
- (3) Hot water connection
- (4) Data cable (HACCP option)
- (5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	T mm	D mm	N mm	V mm
60E	1047	897	1040	630	820	1710	400	730	455	613

Disclaimer: All unit capacities are based on subjective testing.

In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.