



**P8P5 - Panther 800**  
**Series Free-standing Hot**  
**Cupboard - Plain Top - W**  
**1855 mm - 2.5 kW**

Helping to cater in demanding environments such as cafeterias, canteens and restaurants, the Panther 800 Series Hot Cupboard is perfect for plating and garnishing and as a pass to front of house staff, while it also provides extra workspace or can be used as a mobile workstation.

- ✔ Helping to cater in demanding environments such as cafeterias, canteens and restaurants
- ✔ Fan assisted hot cupboard provides even heat distribution, fast heat up and recovery times, and lower energy usage. Four shelf positions allow adjustment to meet individual needs.
- ✔ Fully 1/1 GN compatible hot cupboard for operational efficiency. Units available to take 5 x 1/1 GN containers up to 150mm deep.
- ✔ Accurate digital electronic control of the hot cupboard temperature, adjustable between 20 and 99 °C, ensures compliance with food hygiene regulations
- ✔ Double skinned construction provides efficient heat retention and a cool to touch exterior - safe and energy efficient. Removable doors and shelves allow access to the fully stainless steel interior for easy cleaning
- ✔ Supplied with two heavy duty multi-section chrome plated rod shelves capable of taking the heaviest loads

**Specifications**

**Summary** **Power and Performance**

<b>Range Name</b>	Panther	<b>Total Power kW</b>	2.5
<b>Power Type</b>	Electric	<b>Temperature Range °C</b>	20 - 99
<b>Unit Type</b>	Free-standing	<b>IP Rating</b>	IP24
<b>Available in UK Only</b>	No	<b>Plate Capacity</b>	476
<b>UK Warranty</b>	2 Years Parts and Labour Warranty	<b>Temperature Control</b>	Electronic
<b>Export Warranty</b>	Contact your local dealer		
<b>GTIN Code</b>	5056105103592		

**Key Specifications** **Weights and Dimensions**

<b>Number of Shelves included</b>	2	<b>Unit Height (External) mm</b>	900
<b>Number of Shelf Positions</b>	4	<b>Unit Width (External) mm</b>	1855
<b>Heated Base</b>	Yes	<b>Unit Depth (External) mm</b>	850
<b>Heated Gantry</b>	No	<b>Height (Internal) mm</b>	432
<b>Static or Mobile</b>	Mobile	<b>Width (Internal) mm</b>	1670
		<b>Depth (Internal) mm</b>	512
		<b>Shelf Dimensions Width mm</b>	1610
		<b>Shelf Dimensions Depth mm</b>	512
		<b>Net Weight Kg</b>	171

**Supply Connections** **Shipping**

<b>Requires Installation</b>	No	<b>Packed Weight Kg</b>	201
<b>Requires Electrical Supply</b>	Yes	<b>Packed Height cm</b>	110
<b>UK 3 Pin Plug</b>	Yes	<b>Packed Width cm</b>	188
<b>Requires Hardwiring</b>	No	<b>Packed Depth cm</b>	90
<b>Electrical Supply Rating Watts</b>	2,500		
<b>Single Phase Amps</b>	10.9		
<b>Single Phase Voltage</b>	230		

**Available Options**

**Overshelf or Gantry**

<b>PG5A</b>	PG5A - Ambient Gantry
<b>PG5H</b>	PG5H - Heated Gantry
<b>PS5A1</b>	PS5A1 - 1 Ambient Overshelf
<b>PS5A2</b>	PS5A2 - 2 Ambient Overshelves
<b>PS5A3</b>	PS5A3 - 3 Ambient Overshelves
<b>PS5H1</b>	PS5H1 - 1 Heated Overshelf
<b>PS5H2</b>	PS5H2 - 2 Heated Overshelves
<b>PS5H3</b>	PS5H3 - 3 Heated Overshelves

**Door Locks**

<b>PDL5</b>	PDL5 - Lockable Door
-------------	----------------------

**Corner Guards**

<b>PCG</b>	PCG - Corner Guards[Set of Four]
------------	----------------------------------

**Trayslides**

<b>PTS5</b>	PTS5 - Tray Slide
-------------	-------------------


**Legs/Castors**

<b>PLK</b>	PLK - Legs[non chargeable]
------------	----------------------------

**Available Accessories**

<b>PLK/S</b>	PLK/S - LEG KIT[FOR CONVERSION IN THE FIELD]
<b>PPB8</b>	PPB8 - ADDITIONAL PUSHBAR

**Technical Picture**

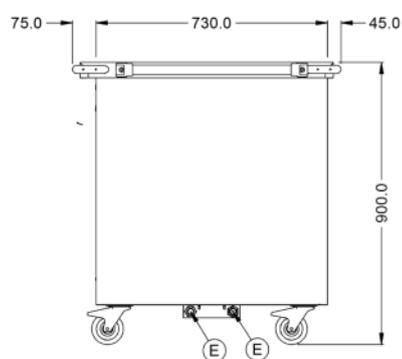

**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 503250  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm