



**BEVERAGE-AIR®**

PROJECT: \_\_\_\_\_  
 ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
 APPROVED: \_\_\_\_\_

## BAR EQUIPMENT - GLASS & PLATE FROSTER

**Model: GF48HC-B**

**TOP LOADER**



### 7 YEAR WARRANTY Parts, Labor, and Compressor

#### CABINET CONSTRUCTION

- Exterior features durable black painted steel
- Interior construction utilizes galvanized steel
- Top includes easy glide, stainless steel lids (1) and stainless steel counter top with edge
- Top loading
- Four (4) adjustable wire dividers
- Two (2) shelf ledges standard with three (3) mounting points
- Flexibility in design provides for plate storage and chilling
- Automatic defrost of coil is standard
- Built-in condensate evaporator system
- No floor drain or additional plumbing is needed



#### OPTIONS & ACCESSORIES

- Locks
- Stainless steel interior
- Remote option\* (refrigerant must be specified at time of order, see note on back on page)

#### REFRIGERATION SYSTEM


- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Chills glasses and plates at 0°F and below (factory setpoint is 0°F)




# BEVERAGE-AIR®

## Glass & Plate Froster Model: GF48HC-B


PLAN VIEW

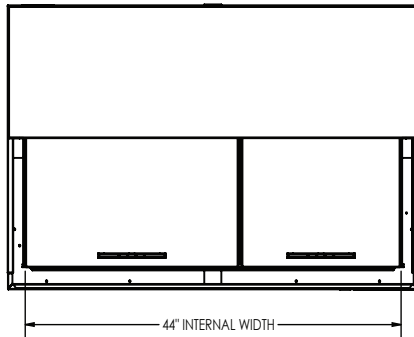

ELEVATION VIEW

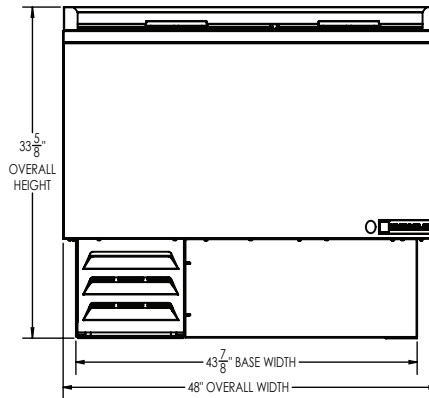

SIDE VIEW

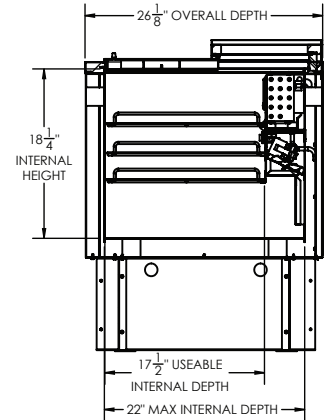

### EXTERNAL DIMENSIONAL DATA

|                     |         |
|---------------------|---------|
| Width Overall (in)  | 48"     |
| Depth Overall (in)  | 26 1/8" |
| Height Overall (in) | 33 5/8" |
| Number of Lids      | 2       |

### INTERNAL DIMENSIONAL DATA

|                               |         |
|-------------------------------|---------|
| NET Capacity (cubic ft.)      | 9.65    |
| Internal Width Overall (in)   | 44"     |
| Internal Depth Overall (in)   | 22"     |
| Internal Height Overall (in)  | 18 1/4" |
| Number of Dividers            | 4       |
| 12 oz. Mugs Chilling Capacity | 164     |
| 8" Plate Chilling Capacity    | 250     |

\*NOTE: Remote units are field wired and come with 6" legs.  
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

### ELECTRICAL DATA

|                     |          |
|---------------------|----------|
| Full Load Amps      | 3.5      |
| Voltage             | 115/60/7 |
| Nema Plug (8' cord) | 5-15P    |

### REFRIGERATION DATA

|                           |                   |
|---------------------------|-------------------|
| Horsepower                | 1/2               |
| Capacity (BTU/Hr)         | 1624              |
| Heat Rejection (BTU/Hr)   | 2436              |
| Charge (lbs/grams/ounces) | 0.1323 / 60 / 2.1 |

### SHIPPING DATA

|                       |     |
|-----------------------|-----|
| Gross Weight - Crated | 292 |
| Height - Crated (in)  | 38" |
| Width - Crated (in)   | 52" |
| Depth - Crated (in)   | 30" |

### ELECTRICAL CONNECTION



115/60/1  
NEMA 5-15P

Unit pre-wired at factory and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 8/25 | Printed in U.S.A.