

E111IX SOFT SERVE GRAVITY-FED SINGLE FLAVOR COUNTERTOP MACHINE

DESCRIPTION

Stoelting's E111I-B Soft Serve Gravity-Fed Single Flavor Countertop Machine, with Stoelting's high-efficiency evaporator system which can handle peak demands. The hermetic compressor provides quiet operation and years of dependable service.



Every machine includes Stoelting's White Glove Service. One call does it all – customer service, technical service, parts or warranty information, installation, startup, sales, on-site service dispatch and much more. Available 24 hours a day, seven days a week year-round.

ITEMS

- ☐ **E111X-302I-B** Air-cooled, single-phase

ACCESSORIES & OPTIONS

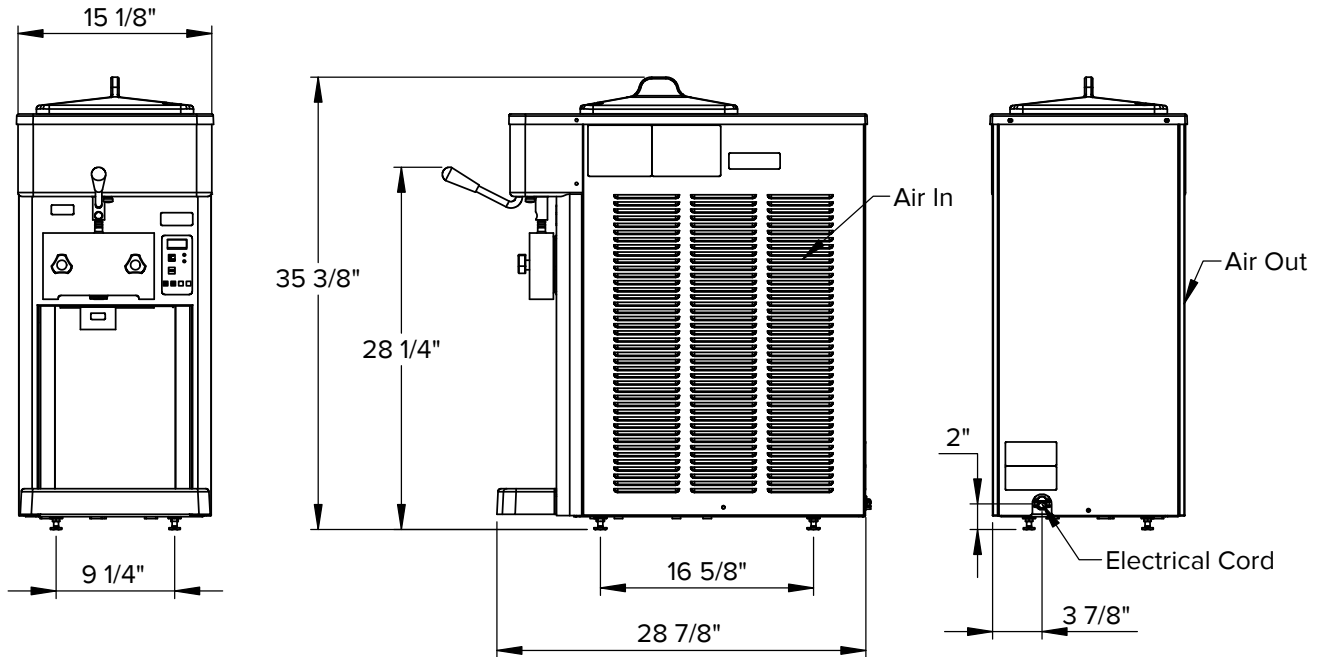
- ☐ **4158310** FS1 Floor Stand 24" x 15" x 31"

FEATURES

- Food-grade plastic blades provide quiet operation and superior durability.
- Simplified design for quick assembly after cleaning.
- Adjust the dispense rate to meet your requirements.
- Highly efficient auger design gently folds the entire contents of the freezing cylinder, delivering a thick, smooth, and creamy product.
- Self-closing spigot eliminates waste and ensures precise portion control.
- Compact counter-top design saves valuable counter space.
- Long-wearing parts offer lower preventative maintenance costs.
- Tamper resistant controls for self-serve applications.
- Reliable and quiet with the combination of Stoelting's evaporator system and the Scroll™ compressor.
- Direct drive motor.

IntelliTec™ Control

- Lighted display communicates with operator for worry-free operation.
- Constant monitoring for ease of troubleshooting.
- Precision-controlled refrigeration system.

E111I-B SOFT SERVE GRAVITY-FED SINGLE FLAVOR COUNTERTOP MACHINE**DIMENSIONS**Height dimensions may vary $\pm 1/2$ "**GENERAL SPECIFICATIONS**

Freezing Cylinder				Hopper Capacity gallon (L)	Drive Motor (hp)	Weight lb (kg)	Crated Weight lb (kg)
Capacity gallon (L)	Compressor						
	Btu/hr	Refrigerant	Charge (oz)				
0.5 (1.89)	4,500	R-448A	30	3.38 (12.79)	1/2	206 (93.4)	250 (113.4)

- Indoor use only.
- Maximum ambient temperature: 100°F (37.8°C).
- Requires a dedicated electrical circuit.
- Units require 3" (7.6 cm) air space on both sides.
- Details on CAD Revit Symbols Libraries are available on www.stoelting.klclcad.com website.

ITEM NUMBER SPECIFICATIONS

Model Number	Cooling	Phase	Volts	Hz	Running Amps	Cord with Plug (Included)
E111X-302I-B	Air	1	220-240	50	13	NA

**Service Information**

800-319-9549 (U.S. Toll Free)
 920-894-2293 (Outside the U.S.)
www.stoeltingfoodservice.com
www.vollrath.com