



Project _____
Item # _____
Quantity _____

Drop-In Induction Dry Well


Model: IWELB-FUL-A

Hatco's Drop-In Induction Dry Well features a simple, robust design and offers an energy efficient, plumbing-free solution to maintain food at the right temperatures for safety and quality. This unit is adjustable with little effort and can hold either a 2.5" or 4" (64 or 102 mm) deep, full-size pan. The well evenly and consistently heats the pan to keep foods hot and fresh.


Standard features

- Durable and tough glass-ceramic well bottom can be easily adjusted to accommodate a 2.5" or 4" (64 or 102 mm) deep pan
- Made for use with an unlimited combination of normal, full-size, half-size, third-size and quarter-size stainless steel pans
- Contains two heat zones with two temperature sensors in each zone
- An easy-to-use, mountable control panel that can adjust heating temperatures in Fahrenheit, Celsius or by five preset temperature levels between 150° and 210°F (66° and 99°C)
- Features a sensor that prohibits the unit to turn on unless a pan is present
- Can be top or bottom mounted into a countertop

*IWELB-FUL-A
shown with 2.5" (64 mm) deep pan
& bezel*



IWELB-FUL-A adjusted for a
2.5" (64 mm) deep pan

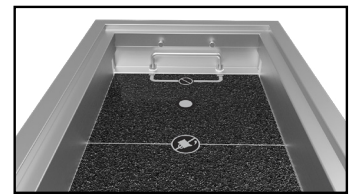

IWELB-FUL-A adjusted for a
4" (102 mm) deep pan

Accessories

Rectangular Stainless Steel Food Pans:

- ☐ Third-Size (2.5" [64 mm] H) ☐ Half-Size (2.5" [64 mm] H)
☐ Full-Size (2.5" [64 mm] H) ☐ Full-Size (4" [101 mm] H)

Bezels for one unit or for grouping multiple units:

- ☐ IWELBEZEL-1N ☐ IWELBEZEL-2N
☐ IWELBEZEL-3N ☐ IWELBEZEL-4N

Stainless Steel Wire Trivets

- ☐ Half-Size ☐ Full-Size



For operation, location and safety information, please refer to the Installation and Operating Manual.



www.hatcocorp.com

customerservice@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)


[Chat](#)



Drop-In Induction Dry Well

Models: IWELB-FUL-A


IWELB-FUL-A Model

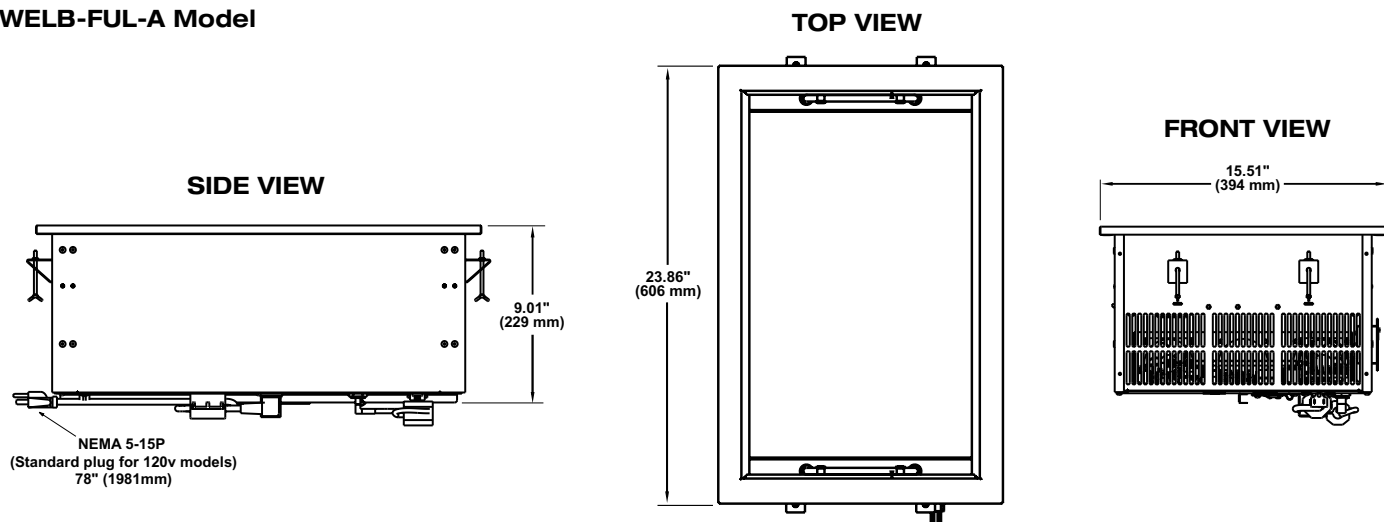

SPECIFICATIONS Drop-In Induction Dry Well


The shaded areas contain electrical information for International model

Models	Dimensions (W x D x H)	Voltage	Watts	Amps	Hz	Cord	Shipping Weight
IWELB-FUL-A	23.86" x 15.51" x 9.01" (606 x 394 x 229 mm)	120	720	6.7	50-60	NEMA 5-15P	43 lbs. (20 kg)
		208		4.3		NEMA 6-15P	
		240		3.9			
		220-230-240		4.1-4.0-3.9		BS-1363	
		220/60		4.1	60	BS-1363	

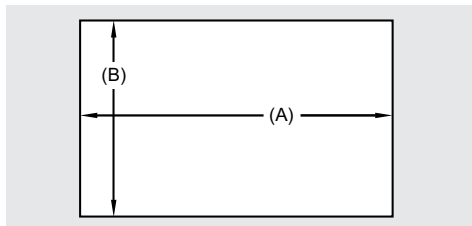

Cutout Dimensions for Countertops


Model	Width (A)	Depth (B)
IWELB-FUL-A	22.25" (565 mm)	14.13" (359 mm)



Cutout Dimensions for Control Panel

Model	Width (A)	Height (B)
IWELB-FUL-A	5.47" (139 mm)	2.17" (55 mm)

PLUG CONFIGURATIONS

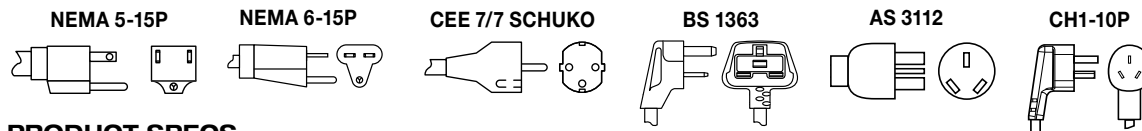

PRODUCT SPECS Drop-In Induction Dry Well

The Drop-In Induction Dry Well shall be manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Drop-In Induction Dry Well shall be rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width. It shall consist of a housing with an aluminum base with dual generator coils and a glass-ceramic well bottom. It shall include a remote control panel with a temperature control in five power levels, F° or C°, a

USB port for updates and future access to additional operating models, two food temperature probes per heating zone, and a 71" (1800 mm) power cord and plug.

Warranty consists of 24/7 parts and service assistance (US and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



www.hatcocorp.com

customerservice@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)

[Chat](#)