



EG-24S

APW Wyott electric countertop griddle will be constructed in the U.S.A. with a corrosion-resistant stainless steel body. The griddle plate will be 0.75-inch (19 mm) thick and will have a polished steel surface. The heating elements will allow control of each twelve [12] inch (305 mm) section and have an independent control for each section. The temperature will be controlled by snap-action thermostats from 150° F (66° C) up to 450° F (232° C). The unit will have one [1] grease drawer. The griddles will be ready to hard-wire to an appropriate electrical connection. Models will operate on 208 V/240 V service. The griddles will be supplied with four [4] inch (102 mm) tall legs that have an adjustment of 1.375 inches (35 mm).

APW Wyott electric griddles are designed to be reliable, efficient, and accurate. Each twelve [12] inch (305 mm) section has its own independent temperature control and the griddle surface is 0.75-inch (19 mm) thick, providing even cooking of a variety of products at the same time.

### WARRANTY

These units come with a one [1] year warranty for parts and labor.

### CERTIFICATIONS


Certified by the following agencies:



### FEATURES AT A GLANCE

- 3,000–4,000 watts per twelve inch (305 mm) section of griddle, with individual controls for each section
- Positive-off, snap-action thermostat allows for precise control of temperature from 150° F (66° C) to 450° F (232° C)
- Stainless steel bullnose and front panel
- 0.75-inch (19 mm) thick polished steel surface
- 3.25-inch wide front grease trough

## EQUIPMENT DIMENSIONS (EG-24S SHOWN BELOW)

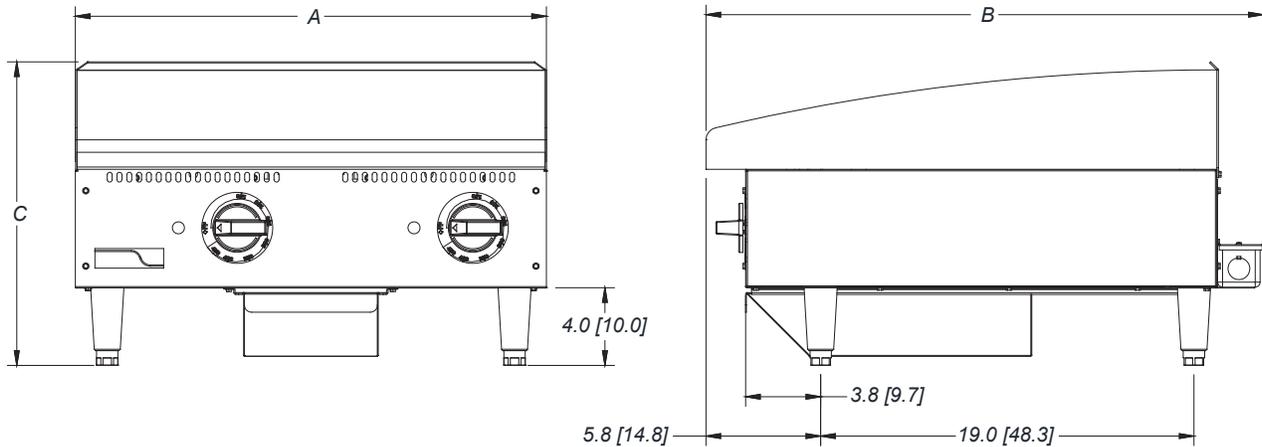

## MECHANICAL SPECIFICATIONS

| Model # | Overall Dimensions                 |                       | Leg Width      | Ship Weight<br>(lbs. / Kilos) | Installed Weight<br>(lbs. / Kilos) |
|---------|------------------------------------|-----------------------|----------------|-------------------------------|------------------------------------|
|         | Width (A) x Height (C) x Depth (B) | (inches / mm)         |                |                               |                                    |
| EG-24S  | 24" x 15.5" x 28.5"                | (61.0 x 39.4 x 48.3)  | 19" (48.3)     | 175 (79.4)                    | 165 (74.8)                         |
| EG-36S  | 36" x 15.5" x 28.5"                | (91.4 x 39.4 x 48.3)  | 32.75" (83.2)  | 262 (118.9)                   | 247 (112.0)                        |
| EG-48S  | 48" x 15.5" x 28.5"                | (121.0 x 39.4 x 48.3) | 44.75" (113.7) | 350 (158.9)                   | 330 (149.7)                        |

## NORMAL AMPS PER LINE WIRE

| Model # | 208V | 240V | Phase | Amps | 208V 3PH |    |      | 240V 3PH |      |      | 208V | 240V |
|---------|------|------|-------|------|----------|----|------|----------|------|------|------|------|
|         |      |      |       |      | X        | Y  | Z    | X        | Y    | Z    | 1 PH | 1 PH |
|         |      |      |       |      |          |    |      |          |      |      |      |      |
| EG-24S  | 675  | 120  | 1     | 5.6  | 14.4     | 25 | 14.4 | 16.7     | 28.9 | 16.7 | 28.9 | 33.3 |
| EG-36S  | 825  | 120  | 1     | 6.9  | 25       | 25 | 25   | 28.9     | 28.9 | 28.9 | 43.3 | 50   |
| EG-48S  | 975  | 120  | 1     | 8.1  | 38.2     | 25 | 38.2 | 44.2     | 28.9 | 44.2 | 57.8 | 66.7 |

## 3 PHASE LOADING KW PER LINE WIRE

| Model # | 208V   | 240V   | Phase | Amps | 208V 50/60 HZ |     |     | 240V 50/60 HZ |      |      |
|---------|--------|--------|-------|------|---------------|-----|-----|---------------|------|------|
|         |        |        |       |      | X-Y           | Y-Z | X-Z | X-Y           | Y-Z  | X-Z  |
|         |        |        |       |      |               |     |     |               |      |      |
| EG-24S  | 6,008  | 8,000  | 3     | 3    | -             | 4   | 4   | -             | 28.9 | 16.7 |
| EG-36S  | 9,012  | 12,000 | 3     | 3    | 3             | 4   | 4   | 4             | 28.9 | 28.9 |
| EG-48S  | 12,016 | 16,000 | 3     | 3    | 6             | 4   | 4   | 8             | 28.9 | 44.2 |

Freight Class: 100  
 FOB: Smithville, 37166

APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.