


# C35D



**Buttress Group Ltd.**  
Top Station Road, Brackley,  
Northants NN13 7UG, UK

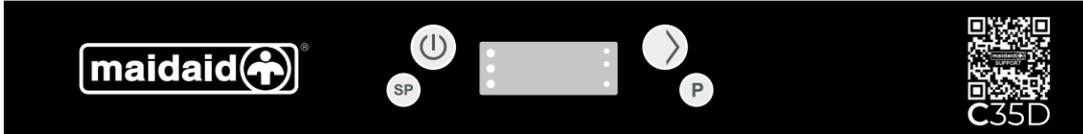

↗ ↓	Overall dimensions (W x D x H)	mm	<b>401 x 490 x 590</b>
	Packaging dimensions (W x D x H)	mm	<b>470 x 590 x 750</b>
	Gross weight	Kg	<b>30</b>
	Net weight	Kg	<b>27</b>
	Cubic volume	m <sup>3</sup>	<b>0.21</b>
☐	Rack size	mm	<b>350 x 350</b>
	Door opening	mm	<b>260</b>
	Max useable height	mm	<b>240</b>
	Rack guide rails		<b>embossed</b>
	Body construction		<b>stratified double skin</b>
🔥	Tank construction		<b>welded - stamped base</b>
	Tank volume	L	<b>7</b>
	Tank heating element	kW	<b>1.4</b>
	Surface scrap trays		<b>composite (2.5mm mesh)</b>
	Wash arms		<b>parallel (quick release)</b>
🌡️	Wash pump type		<b>single flow</b>
	Wash pump power	kW	<b>0.15</b>
	Wash temperature	°C	<b>60 - 65 (adjustable)</b>
	Boiler type		<b>pressurised</b>
🔥	Boiler volume	L	<b>2.6</b>
	Breaktank		<b>no</b>
	Boiler heating element	kW	<b>2.6</b>
🌡️	Rinse booster pump		<b>no</b>
	Rinse booster pump power	kW	<b>n/a</b>
	Rinse temperature	°C	<b>65 - 80 (adjustable)</b>
	Rinse arms		<b>parallel (quick release)</b>
🚰	Drain system		<b>partial drain</b>
	Drain filter		<b>triple filter</b>
	Drain pump		<b>yes</b>
💧	Rinse aid dispenser	<i>peristaltic</i>	<b>yes</b>
	Detergent dispenser	<i>peristaltic</i>	<b>yes</b>
🍷	Water consumption per cycle	L	<b>2.0</b>
	Inlet water pressure	bar	<b>2.0 - 4.0</b>
	Fast program (GLS1)	sec	<b>75</b>
	Total programs	<i>programs</i>	<b>5</b>
	Total power	kW	<b>2.75</b>
⚡	Electric connection	V-Ph-Hz	<b>230-240V 1N 50Hz</b>
	<i>Alternative</i>		<b>not convertible</b>
🔌	Fuse	A	<b>13 (moulded plug)</b>
	Water softener		<b>no</b>




## Supplied with

Flat rack	2
Cutlery rack	1
Electric cable	1
Drain hose	1
Fill hose	1

# C35D



**Buttress Group Ltd.**  
Top Station Road, Brackley,  
Northants NN13 7UG, UK

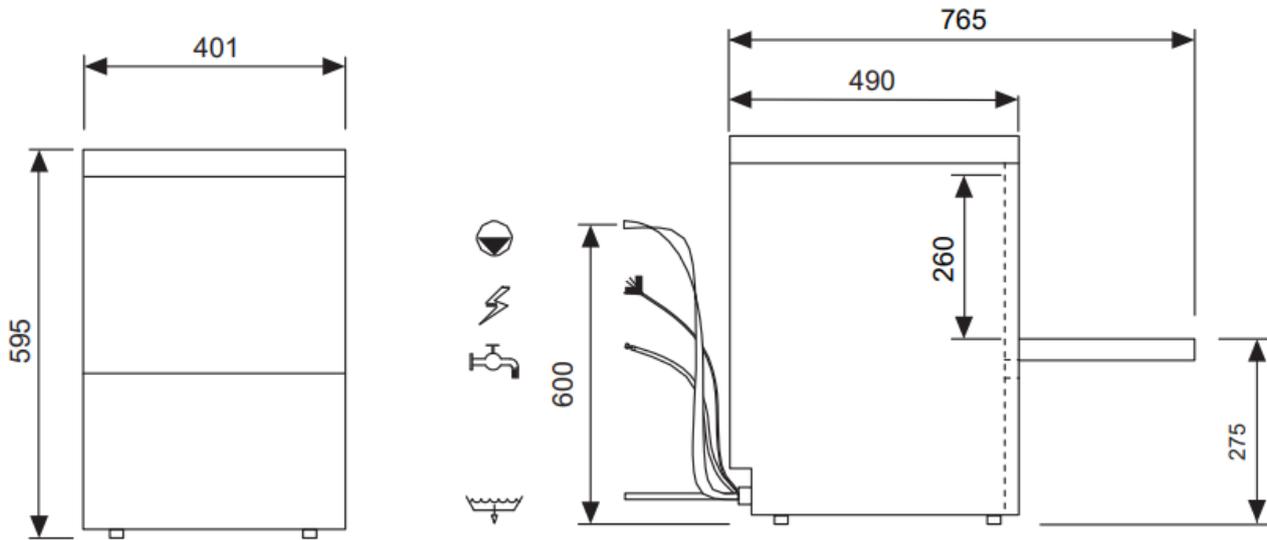

All services must be within 1 metre