

Culino 150E Static Jacketed Kettle

Model – Culino 150E (4215206)

FEATURES

- Culino static jacketed kettle
- Electric heated version
- 316 Stainless steel bowl
- Flat panel digital controls
- Food temperature control (option)
- Multifunction timer (option)
- Automatic measured water filling (option)
- Electric tilting
- Measuring stick
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories




TECHNICAL DATA

Net Volume 150L
Spare Volume 19 L
Gross Volume 169 L
Dimensions
Width 1360mm
Height 1039mm
Depth 965mm
Connections
Water Cold ø15mm
Hot ø10mm

Electrical Power 20 kW
Voltage 400-415V,
3P+N+E 50/60Hz
AMP 32A
Total Heat Load 20kW
Latent 1.0 kW,
Sensible 4.3 kW
Waste By kitchen contractor
Net Weight 250 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215839
Single kettle subsurface – 4215840
Group kettle surface – 4215843
Group kettle subsurface - 4215844

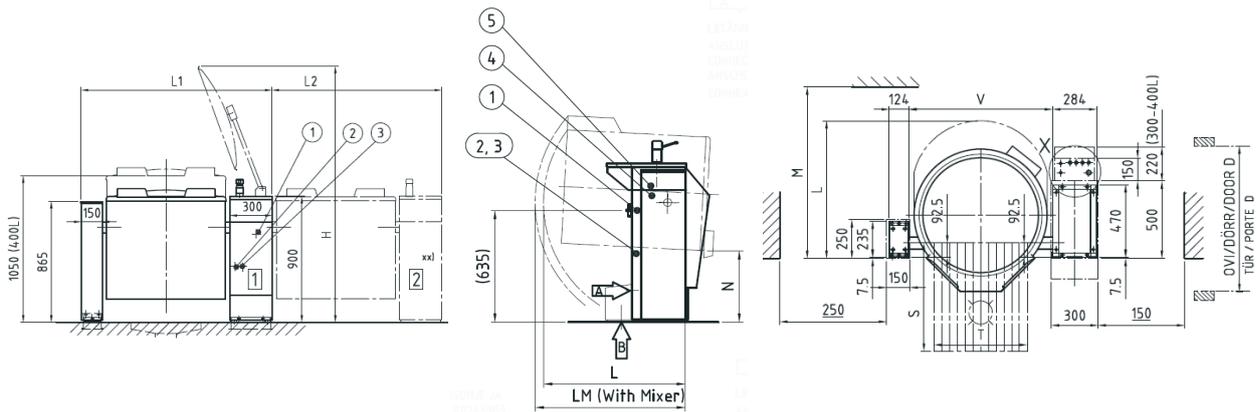

Finland
metos.com/manufacturing

Metos Oy Ab
Ajhjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

- (1) Electrical connection
- (2) Cold water connection
- (3) Hot water connection
- (4) Data cable (HACCP option)
- (5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	S mm	T mm	D mm	N mm	V mm
150E	1360	1210	1010	895	910	1980	800	600	945	420	926

Disclaimer: All unit capacities are based on subjective testing.

In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.