

145 Kg/24h (maximum*)

Modular Ice Maker:
SLIM M145 17g - Air Cooled

- USB
- BLUETOOTH
- WI-FI
- TOUCH CONTROL
- RAINBOW TECHNOLOGY
- SAFE ICE
- PROGRAMMED OZONE CYCLE
- SCHEDULED PRODUCTION



ICE TYPE

	PCS / CYCLE	ICE weight
DICE 22X22X24 mm	168	10 g
LARGE 29X29X24 mm	110	17 g

ICE PRODUCTION

Kg/24h
lbs/24h

Air Cooled Unit

Air Temp.	Water Temp.			
	32° 90°	21° 70°	15° 60°	10° 50°
10°	122	139	143	145
50°	269	306	315	325
21°	110	124	130	134
70°	242	273	287	295
32°	95	106	108	111
90°	209	234	238	245
38°	81	89	96	99
100°	179	196	212	218

Water Cooled Unit

Air Temp.	Water Temp.			
	32° 90°	21° 70°	15° 60°	10° 50°
10°	122	139	143	145
50°	269	306	315	320
21°	110	124	130	134
70°	243	273	287	295
32°	112	120	126	128
90°	247	265	278	282
38°	108	116	122	124
100°	238	256	269	273

FEATURES

- 2 year warranty
 - 3 years on evaporator & compressor
- Stainless steel construction
- Air or water cooled
- Sanitisation cycle
- Touch sensitive button
- Acoustic and luminous alarms
- Report HACCP alarms
- External cube weight adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Supplied with 13 amp moulded plug
- My Ice APP
 - Programmable ice production
 - Machine performance

OPTIONS

- Ozone sanitisation
 - Prevents biofilm & microbial growth
- Rainbow technology
- Patented evaporator treatment
- Machine variants
 - SLIM M145W 17g water cooled
 - SLIM M145 10g air cooled
 - SLIM M145W 10g water cooled

SPECIFICATIONS

SLOPE BIN

MSB105 - MSB155 - MB255

DIMENSIONS

WxDxH (mm)
560x620x575

630x690x740

VOLTAGE

220-240/50/1

REFRIGERANT

R290
GWP=3
Ton CO2 equivalent:
Air= 0
Water= 0

		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	kg	kg
SLIM M145 A	220-240/50/1		1131	650	13 ¹	13.0	7.7	53	65
SLIM M145 W	220-240/50/1		1131	590	13 ¹	10.1	54.3	53	66

*130 Kg/24hr average production @ 21°C ambient air temp. & 15°C incoming water water temp.


¹ Verify supplied with 13 amp moulded plug

Tel. 0345 130 8070
sales@maidaid-halcyon.co.uk
www.maidaid.co.uk

145 Kg/24h



Modular Ice Makers:
SLIM M145 10g - SLIM M145 17g - SLIM M145 145W 10g - SLIM M145W 17g

DIMENSIONS

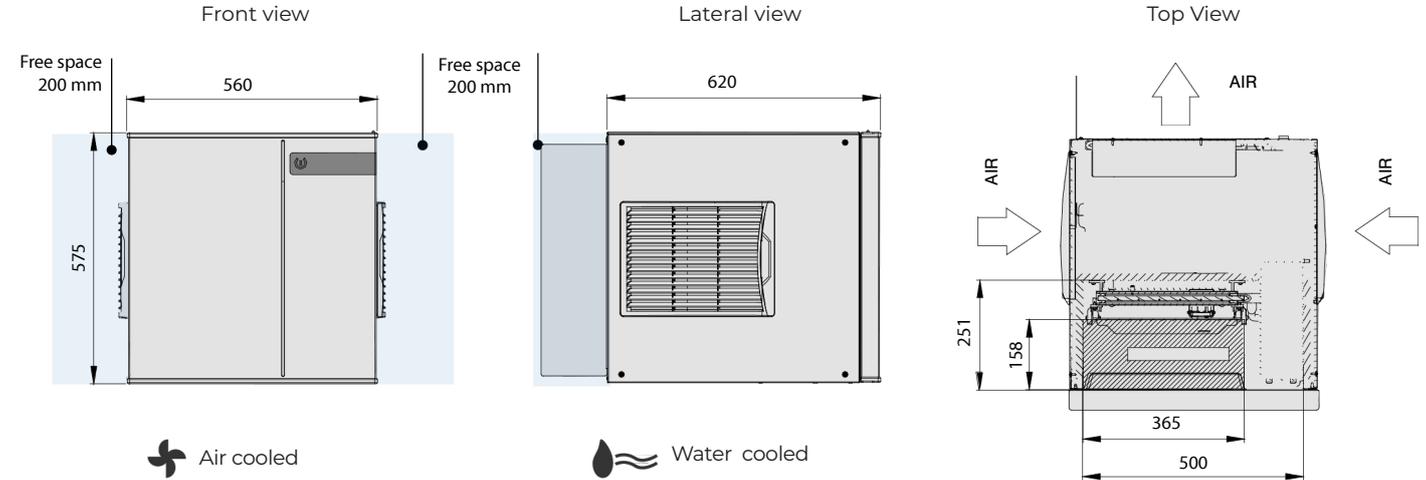

Air cooled

Water cooled

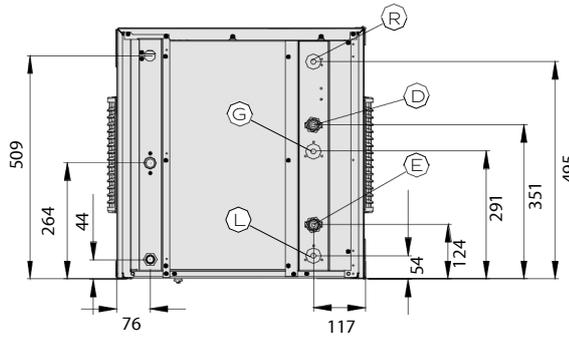
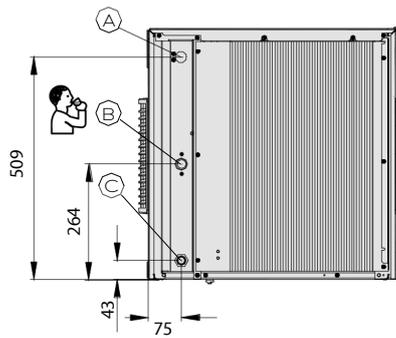


- (A)** Electrical supply cable
- (B)** Potable water inlet 3/4
- (C)** Water drain \varnothing 20mm
- (D)** Condenser water inlet 3/4 GAS
- (E)** Condenser water outlet 3/4 GAS
- (G)** Discharge gas split line 1/2" male quick connection
- (L)** Suction gas split line 1/2" male quick connection
- (R)** Remote electrical connection for condenser fans

TOUCH CONTROL

APP MyICE

Control and monitor your ice machines directly from a smartphone

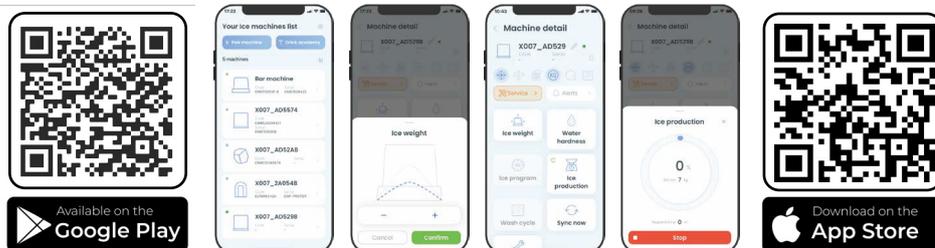

Touch Sensitive Stand-by / Start button (LED with a seamless colour transition from white to red)

Operating requirements

	Min.	Max
Air Temperature	10°C	40°C
Water Temperature	5°C	35°C
Water Pressure	1 Bar (14psi)	5 Bar (70psi)
Water conductivity	20 μ S	500 μ S
Electrical supply	-10%	+10%

Rejected Heat	1781 W
Air Volume	590 m ³ /h

Tel. 0345 130 8070
sales@maidaid-halcyon.co.uk
www.maidaid.co.uk