

Bulk Storage - Standard Depth Drawer Units

Fridge to Freezer Unit + Cover Top (VCS3)
Fridge Only Unit + Cover Top (HCS3)



Blast Chill (BC)
A BC option is available in 1,2 or all 3 VCS Drawers for added functionality

VCS3/CT & HCS3/CT
Standard Castors (C)
Cover Top (T)

Bulk Storage - Shallow Depth Drawer Units

Fridge to Freezer Unit + Solid Worktop (VLS3)



VLS3/CW
Standard Castors (C)
Solid Worktop (W)

Hydrocarbon R600a Refrigerant

(also available in HFC R404a) (R600a only)

 VCS R2 Energy Rating: B Consumption: 761 kWh/annum Capacity: 86 L Frost-free: 5 days Temp range: 40°C-40°C	 VLS R2 Energy Rating: B Consumption: 781 kWh/annum Capacity: 65 L Frost-free: 5 days Temp range: 40°C-40°C	 HCS R2 Energy Rating: A+ Consumption: 239 kWh/annum Capacity: 86 L Frost-free: 5 days Temp range: 40°C-40°C
Standard Drawer 'B' Energy Rating in Freezer Mode	Shallow Drawer 'B' Energy Rating in Freezer Mode	A+ Fridge Drawer
'A' Energy Rating in Fridge Mode (Consumption 307 kWh/annum)	'A' Energy Rating in Fridge Mode (Consumption 325 kWh/annum)	A+ Energy Rating (Consumption 239 kWh/annum)

Storage Capacity	
Standard Drawer	Shallow Drawer
Gastronorm Pans 4 x 1/1 GN pans 100 mm Deep or equivalent	Gastronorm Pans 4 x 1/1 GN pans 75 mm Deep or equivalent
Maximum Weight 40 kg of Food	Maximum Weight 30 kg of Food
Volume 86 Litres	Volume 68 Litres

Applications

- Provides back-up storage, close to the point of use, for maximum efficiency during busy service periods
- With our Low Velocity Cooling system, food can be packed into the drawer without leaving any air gaps - there are no 'hot spots' in an Adande Drawer
- On request, Adande units can be arranged in mixed configurations, combining Standard Depth with Shallow Drawers & Multi Temperature with Fridge Only Drawers

Temperature Flexibility

Foods can be stored at the optimum set point anywhere in the range

+15°C ↔ -22°C

 for Standard & Shallow Drawers

+15°C ↔ 0°C

 for A+ Fridge Drawers

Climate Testing

Tested to **Climate Class 4** (30°C & 55% relative humidity) for temperature and energy consumption and to **Climate Class 5** (40°C & 40% relative humidity) for temperature

Electrical


Mains Supply
230 Vac 50 Hz

Power Socket (included)
Correct 2 or 3 Pin Plug fitted for each country

Mains Lead (included)
2 Metre Coiled Lead


Plan View |

Bulk Storage Units
Standard Depth Drawers
• Fridge to Freezer Unit (VCS3)
• Fridge Only Unit (HCS3)
& Shallow Depth Drawers (VLS3)
with Open Drawer

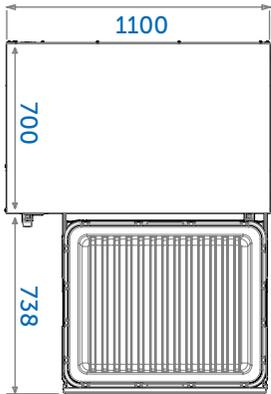


Elevations |

Bulk Store - Standard Depth 3 Drawer
• Fridge to Freezer Unit (VCS3)
• Fridge Only Unit (HCS3)
Standard Castors (C) Solid Worktop (W)

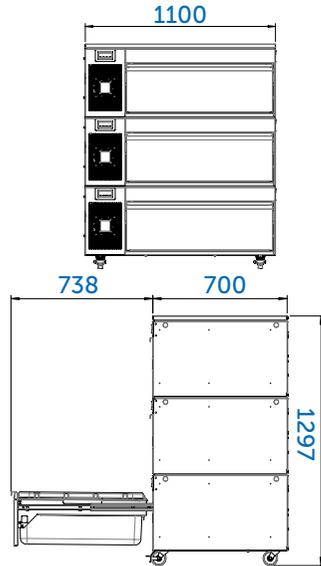

VCS3/CW & HCS3/CW

Bulk Store - Shallow Depth 3 Drawer
Fridge to Freezer Unit (VLS3)
Standard Castors (C)
Cover Top (T)

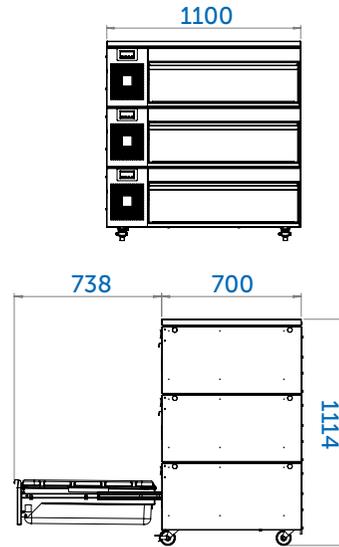

VLS3/CT

Tops |



Three Drawer Modules |



Base |



OPTIONS

Standard and Shallow Drawer Specifications (Temperature Range +15°C to -22°C)

STANDARD DEPTH DRAWER UNITS + COVER TOP (T)	Standard Castor Base (C)	
Finished Height	1288 mm	VCS3/CT
Load Bearing Capacity	0 kg	
SHALLOW DEPTH DRAWER UNITS + COVER TOP (T)	Standard Castor Base (C)	
Finished Height	1114 mm	VLS3/CT
Load Bearing Capacity	0 kg	

STANDARD DEPTH DRAWER UNITS + SOLID WORKTOP (W)	Standard Castor Base (C)	
Finished Height	1297 mm	VCS3/CW
Load Bearing Capacity	180 kg	
SHALLOW DEPTH DRAWER UNITS + SOLID WORKTOP (W)	Standard Castor Base (C)	
Finished Height	1123 mm	VLS3/CW
Load Bearing Capacity	180 kg	

Standard Drawer Specifications (Temperature Range +15°C to 0°C)

STANDARD DEPTH DRAWER UNITS + COVER TOP (T)	Standard Castor Base (C)	
Finished Height	1288 mm	HCS3/CT
Load Bearing Capacity	0 kg	

STANDARD DEPTH DRAWER UNITS + SOLID WORKTOP (W)	Standard Castor Base (C)	
Finished Height	1297 mm	HCS3/CW
Load Bearing Capacity	180 kg	