

LEG TYPE, GAS-FIRED KETTLES

TILTING, 2/3 STEAM JACKETED

"SPLASH PROOF SERIES"

40, 60, or 80 GALLONS (150, 225, or 300 LITERS)

Cleveland Standard Features

- High efficiency Power Burner Heating System (62% to 65% efficiency)
- Fast Heat-up and Recovery Time, 140M BTU's on 40 gallon models, 190M BTU's on 60 gallon and larger
- Insulated Heat Exchanger
- Automatic Ignition System
- Steam Jacket permanently filled with treated, distilled water. Venting and/or refilling not required.
- Solid State Controls, for Temperature and Low Water Safety, in a plug-in Control Module
- Control Panel includes:
 - Precise, consistent temperature control: less than $\pm 1^{\circ}\text{C}$ variance (ideal for simmering).
 - L.E.D. Indicators for Heat Cycle and Low Water Warning.
 - Power "on/off" Switch
- Front mounted combination Pressure/Vacuum Gauge
- Type 304 Stainless Steel with #4 finish on kettle and supports
- Tilt Mechanism of roller bearings and case hardened self-locking worm and segment gear
- Support Legs with level adjustable feet, flanged for floor bolting
- 50 psi Steam Jacket Rating and Safety Valve
- Standard voltage is 115 volts, 60 Hz, single-phase, supplied with cord and plug
- Standard for natural gas operation
- Typical approvals include AGA, CSA, CE, NSF and ASME

Options & Accessories

- ☐ Type 316 Stainless Steel Kettle Liner for high acid food products (316)
- ☐ Pan Carrier (PCK)
- ☐ Flow Diverter (FD)
- ☐ Food Strainer (FS)
- ☐ Kettle Markings (KM)
- ☐ Cooking Baskets and Tri-Basket Supports (BS and TBS)
- ☐ Drain Strainers (DS-)
- ☐ Faucet Mounting Bracket (FBKT)
- ☐ 2" or 3" diameter Tangent Draw-Off Valve with Drain Strainer (TD2 or TD3*), *TD3 for 60 and 80 gallon only and will raise height of kettle by 5-5/8" (143mm)
- ☐ 3" diameter Butterfly Valve (BV3)

MODELS: ☐ KGL-40-T ☐ KGL-80-T
☐ KGL-60-T




Shown with optional Spring Assisted Cover and 2" Tangent Draw-Off Valve





Short Form Specifications

Shall be CLEVELAND, Gas-Fired Tilting Kettle, Model KGL- ____ T; ____ gallons, 2/3 Steam Jacketed, Power Burner Heating System, Insulated Heat Exchanger, 50 psi Steam Jacket Rating. Infinite Variable Temperature Control, L.E.D. indicators for Heat Cycle and Low Water Warning, Automatic Ignition System.

- ☐ Spring-assisted, hinged, rotatable, domed Stainless Steel Cover (CHS-)
- ☐ Hot and Cold Water Faucet with Swing Spout (DPK)
- ☐ Kettle Accessory Kit (KAK) includes:
 - ☐ Clean-up Brush (CB)
 - ☐ 36" Kettle Paddle (KP)
 - ☐ 36" Kettle Whip (KW)
 - ☐ 36" Kettle Brush (KB)
 - ☐ Draw-off Brush (DB)
 - ☐ 24 oz. Ladle (KL)
- ☐ Automatic Water Meter (GMF or LMF)
- ☐ Measuring Strip (MS)
- ☐ Option for Propane Gas operation
- ☐ Correctional Package
- ☐ Heat Deflector Shield (HS001)

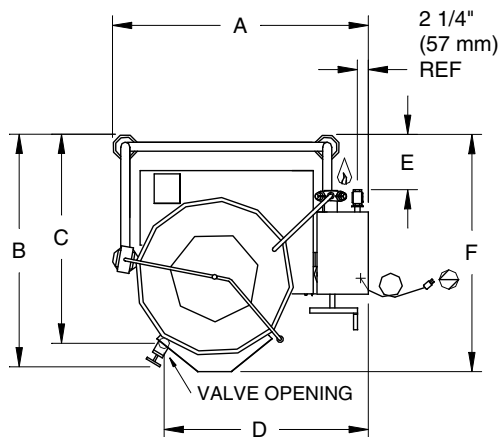

NOTE: TD3, 3" tangent draw off will raise height of kettle by 5-5/8" (143mm). Available on 60 & 80 gallon models only.

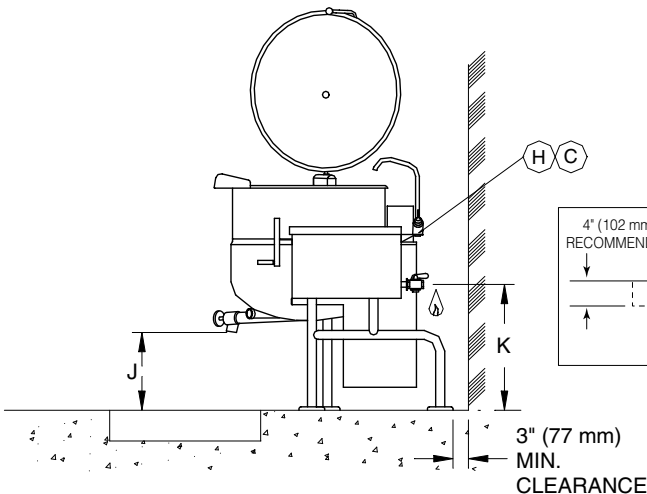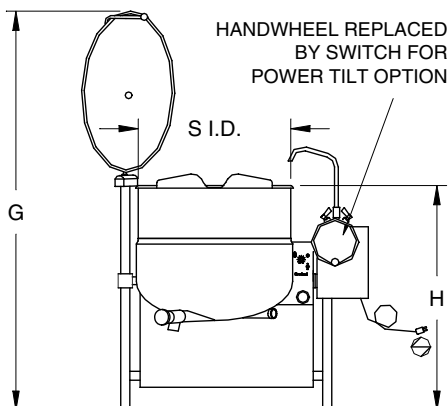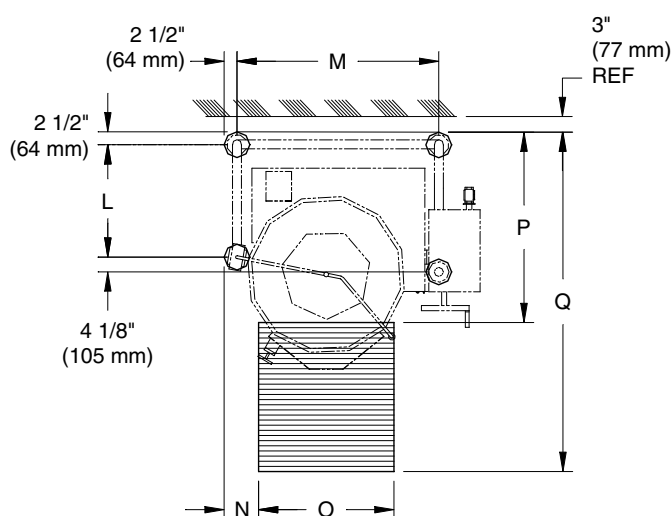

UNIT SHOWN WITH OPTIONAL 2" TANGENT DRAW-OFF VALVE, SPRING ASSIST COVER AND HOT & COLD WATER FAUCET.

CAPACITIES: (in 8 oz. servings, other sizes may be calculated)
 40 Gallon / 150 liters . . . 640 servings
 60 Gallon / 225 liters . . . 960 servings
 80 Gallon / 300 liters . . . 1280 servings

DIMENSIONS

GALS./LITERS		A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	S.I.D.
40	IN	45 3/4	42 1/2	38	35	9	42 1/4	71	40 1/2	15 1/2	23 1/4	19	35 3/4	4 3/8	24	33	63	26
150	mm	1163	108	966	889	229	1074	1804	1029	394	591	483	909	112	610	839	1601	661
60	IN	49 3/8	46	41 1/2	37	11 3/4	47 1/4	75	43 3/4	15 1/4	24 1/2	22	39 3/8	6	28	37	68	29 1/2
225	mm	1255	1169	1055	940	299	1201	1905	1112	388	623	559	1001	153	712	940	1728	750
80	IN	53	49	44 1/2	39	14 3/4	51	78	44 3/4	14	25	25	43	7	30	40	72	33
300	mm	1347	1245	1131	991	375	1296	1982	1137	356	635	635	1093	178	762	1016	1829	839

 GAS				 ELECTRIC	WATER  	CLEARANCE
NATURAL		PROPANE		120V-1 Phase, 60 Hz, 10 amps	  ½" dia. Soft Copper Tubing (each) When ordered with optional faucet.	RIGHT = 0"
Piping: ¾" N.P.T.		Piping: ¾" N.P.T.				LEFT = 0"
Supply pressure:		Supply pressure:				REAR = 3"
4.00" W.C. minimum		4.00" W.C. minimum				Allow 6" space minimum from rear and sides when located near combustible walls. 12" recommended on right side for service
14.00" W.C. maximum		14.00" W.C. maximum				
Manufacturer must be notified if unit will be operated above 2,000 ft. altitude.						

NOTES:

Cleveland Range reserves right of design improvement or modification, as warranted.
 Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes.
 Installation of backflow preventers, vacuum breakers and other specific code requirements is the responsibility of the owner and installer.
 Cleveland Range equipment is built to comply with applicable standards for manufacturers. Included among those approval agencies are U.L., A.G.A., NSF, ASME/N.Bd., CSA, CGA, ETL and others.