PROJECT:	
ITEM #	QTY: _
MODEL #	-

CABINET CONSTRUCTION

20 Gauge Stainless Steel Door

· Heavy-Duty Cylinder Locks

Hinged Front Shroud

FEATURES

Stainless Steel Exterior And Interior

Stainless Steel Interior Door Liner

Low Profile Vertical Door Handles

 Energy Saving Thermal Breaker Stainless Steel Breaker Caps **3** Silver Freeze Wire Shelves

 Expansion Valve Technology Manager's Lockout Feature

Environmental Concerns Hot Gas Condensate Evaporator

REFRIGERATION

Anti-Condensate Perimeter Heater Variable Speed Compressor Technology

Consistent Product Temperatures

One Piece, Snap-In Magnetic Door Gaskets

6" High Adjustable Stainless Steel Legs • 8' Cord And Plug (see electrical data for details)

Full Electronic Control With Touchpoint Interface

Stay-Open Door Feature For Easy Product Loading

Magnetic Door Switch Automatically Activates Interior LED Light

EXTRA WIDE PASS-THRU SOLID DOOR FREEZER

FS-1D-S1-EW-PT-HC



EXCLUSIVE WARRANTY

- **6 Year Parts & Labor Warranty**
- 7 Year Compressor Warranty
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)





OPTIONS & ACCESSORIES

- Secure-Temp[™] Technology
- Stainless Steel Case Back
- Stainless Steel Kick Plate
- Exterior Door Laminate

Rev 9/1/23 Printed in U.S.A.

• Door Swing Orientation (at time of order)

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

- Heat Shield (left, right)
- Tray Slides (type A & A/C)
- 3", 6" Casters Or 6" Seismic Legs

FlexTemp Models Maintain Between 0°F And 20°F

Refrigeration System Uses R-290 Refrigerant To Comply With All

Adaptive Defrost For Reduced Energy Consumption And More

• Epoxy Coated Evaporator Coil, Located Out Of The Food Zone

Freezer Capable Of Maintaining Product Temperature -10°F

Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs


- Correctional Package
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note)


Additional Shelves


- - APPROVAL: ____



FS-1D-S1-EW-PT-HC

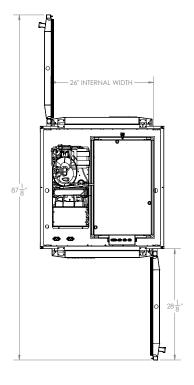

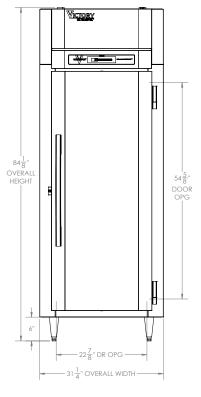

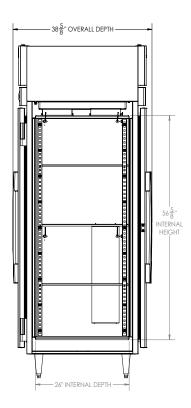

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top and	3" rear clearance	is required
-------------	-------------------	-------------

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	26.06	Cabinet Voltage**	115/60/1	Height	88″
Width, Overall (in.)	31 1/4"	Total Amperes	9.1	Width	41"
Depth, Overall (with handle)	38 5/8″	NEMA Plug (8' cord)	5-15P	Depth	41"
Height Overall (6″ legs)	84 1/8″	REFRIGERATION DATA		Crated Weight	460 lbs
Depth, Door Open 90°	87 1/8"	Condensing Unit Size, HP	3/4	*NOTE: Remote units are field wired and comes with 6" legs. Refrigerant must be specified at time of order.	
Door Openings (in.)	22 7/8" x 54 5/8"	Refrigerant	R-290		
No. Of Doors/Shelves	2/3	Capacity (BTU/HR) (100°F/-20°F)	2450		
		Heat Rejection (BTU/HR)	3675		
		Charge (Ibs/grams)	0.2866/130		

** NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Victory recommends using a HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com Rev. 9/1/23 Printed in U.S.A.

an Ali Group Company

