
Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

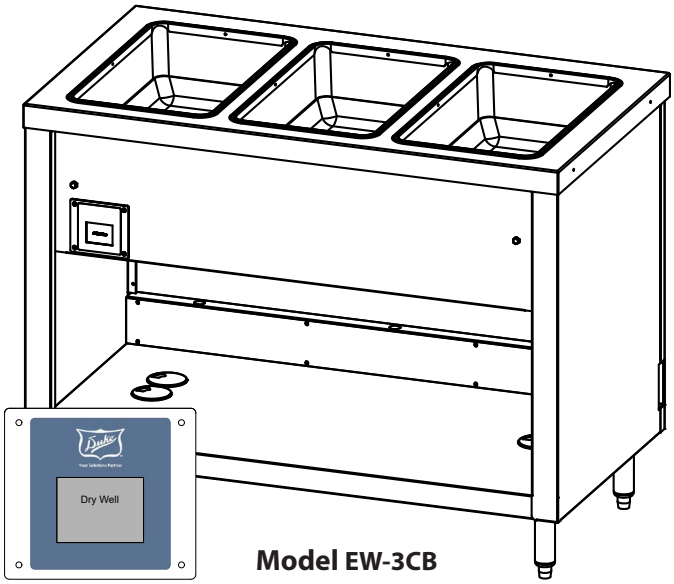

Model EW-3CB

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmaduke® Ganged Waterless Well

Hot Food Units - Standard

- ❑ EW-2CBPG/EW-2CBSS 2 top openings
- ❑ EW-3CBPG/EW-3CBSS 3 top openings
- ❑ EW-4CBPG/EW-4CBSS 4 top openings
- ❑ EW-5CBPG/EW-5CBSS 5 top openings
- ❑ EW-6CBPG/EW-6CBSS 6 top openings

TOP:

- ■ 16 gauge, 300 Series stainless steel
- ■ Die-stamped openings 11 7/8" x 19 7/8"

Heat Compartments:

- ■ 6 ½" deep wells Dry operation only
- ■ Includes Silicone bottom pad
- ■ Fully Insulated wells
- ■ Rope Element in each compartment
- ❒ 120, 208 or 240 volt A/C
- ■ Single Phase standard

BODY AND INTERIOR SHELF:

- ❑ Stainless Steel body
- ❑ Painted body w/ choice of 12 powder coat colors
- ▪ Full bottom shelf to match body
- ▪ Stainless Steel Front Panel w/ Control screen
- ▪ 6" polished stainless steel adjustable legs

CONTROLS:

- ■ Standard intuitive, easy to use touch screen control – One control for all wells
- ■ Easily adjusted presets LOW/MED/HIGH
- ■ Built in WIFI and Bluetooth for future connectivity

OPTIONS:

- ❑ 14 gauge tops
- ❑ Backsplash
- ❑ Recessed top (to accommodate griddles, fryers, etc.)
- ❑ Adaptor plates
- ❑ 3-phase wiring
- ❑ Optional outlet for overhead LED lights
- ❑ 6', 8' or 10' Cord and plug
- ❑ Heated base module
- ❑ Electric outlet in base
- ❑ Sliding Doors
- ❑ Pass-thru construction
- ❑ Veneered plastic laminate panels on body
- ❑ Powder coat paint in 12 colors
- ❑ Casters (add cord and plug), 5" swivel with locks
- ❑ Food shields
- ❑ Tray slides
- ❑ Work shelves
- ❑ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34"

Certifications

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Specification subject to change


WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning


A.I.A. File No. 35-C-13

Catalog No. Waterless Well


Food Warmer Ganged Waterless Well


Ganged Waterless Well Standard Counter

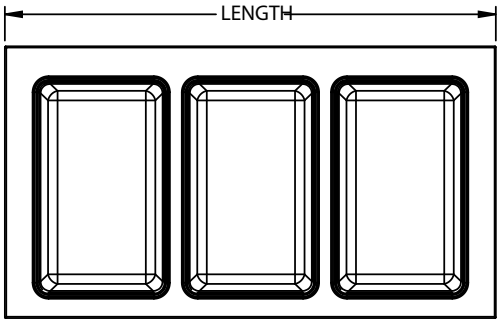


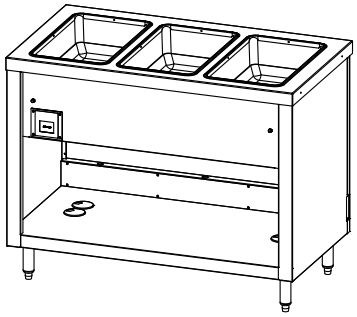


Control Specifications

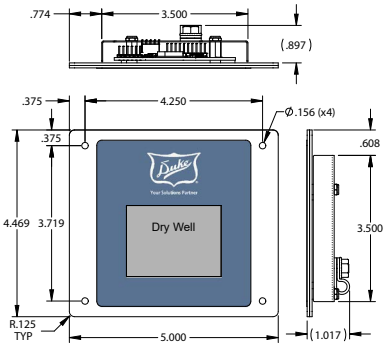

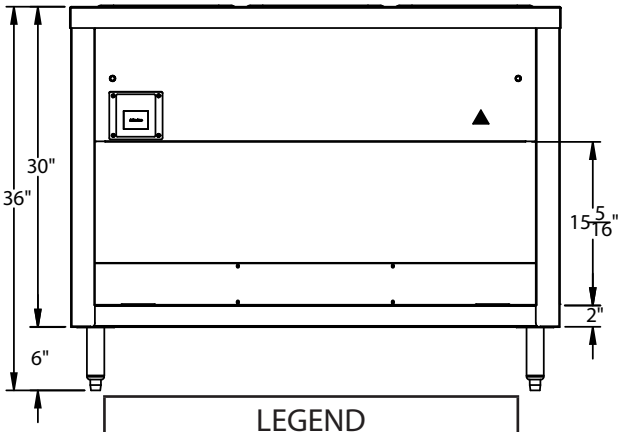

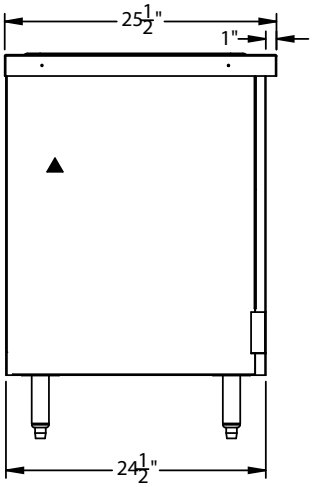

Control Cutout



LEGEND	
▲	ELECTRICAL CONNECTION

DIMENSIONS: **FREIGHT CLASS: 150**

Model		Length		Depth		Height		Top Openings	Cube ft. Crated	Weight	
Enameled	Stainless	in	cm	in	cm	in	cm			lbs	kg
EW-2-CBPG	EW-2-CBSS	32	81.3	25-1/2	64.8	36	91.4	2	28.1	210	95.5
EW-3-CBPG	EW-3-CBSS	46	116.8	25-1/2	64.8	36	91.4	3	39.6	264	120.0
EW-4-CBPG	EW-4-CBSS	60	152.4	25-1/2	64.8	36	91.4	4	51.2	344	156.4
EW-5-CBPG	EW-5-CBSS	74	188.0	25-1/2	64.8	36	91.4	5	62.3	433	196.8
EW-6-CBPG	EW-6-CBSS	88	223.5	25-1/2	64.8	36	91.4	6	74.3	527	239.6

ELECTRICAL SPECIFICATIONS: **Cord & NEMA plug NOT included**

Model	120V 665W			208V 500W			240V 665W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
EW-2-CBPG/SS	1414	11.8	5-15	1084	5.2	6-20	1414	5.9	6-20
EW-3-CBPG/SS	2083	17.4	L5-30	1588	7.6	6-20	2083	8.0	6-20
EW-4-CBPG/SS	2748	22.9	L5-30	2088	10	6-20	2748	11.5	6-20
EW-5-CBPG/SS	3417	28.5	5-50	2592	12.5	6-20	3417	14.2	6-20
EW-6-CBPG/SS	N/A			3092	14.9	6-20	4082	17.0	L6-30

Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Your Solutions Partner

Printed in U.S.A

© 2025, Duke Manufacturing Co.