

DIRECT GAS COOKER LT.50

CODICE
CR0990139

MODELLO
D73/10PGD05

SERIE
DIAMANTE70

Project:
Rev:
Zone:
Location:



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

Possibility of hot or cold water loading
Stainless steel tank with aisi 316 bottom

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

DIRECT GAS COOKER LT.50

Project:
Rev:
Zone:
Location:



CODICE
CR0990139

MODELLO
D73/10PGD05

SERIE
DIAMANTE70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990139
DEFINITION	D73/10 PGD05 GAS COOKER DIR. M60 50LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	72,800 Kg
VOLUME (net)	0,381
PACKAGE LENGTH	660,000 mm
PACKAGE WIDTH	850,000 mm
PACKAGING HEIGHT	1150,000 mm
PACKAGE VOLUME	0,645 m3
GROSS PACKING WEIGHT	82,000 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0,015 kW
GAS POWER	10,50
GAS POWER (G25.3/25mbar)	10,00
IP GRADE	IPX4
CERTIFIED MODEL	D73/10 PGD05

DIRECT GAS COOKER LT.50

Project:
 Rev:
 Zone:
 Location:




CODICE
CR0990139

MODELLO
D73/10PGD05


SERIE
DIAMANTE70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

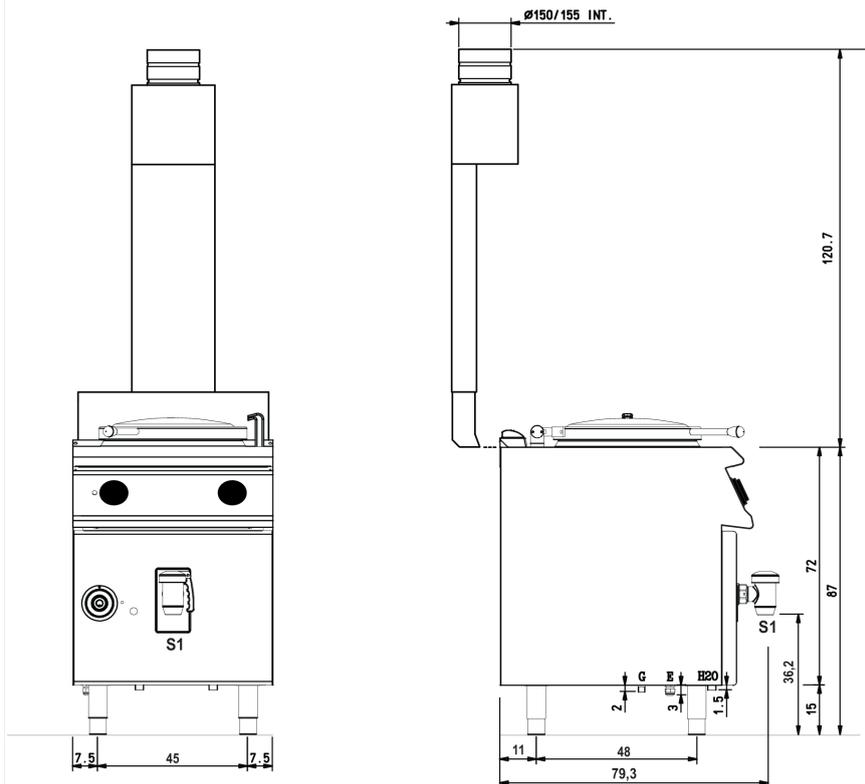

(D) 73/10 PGD05



Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacchi arrivo acqua - Wasseranschluss - Water inlet
 Arrivée eau - Union de agua - Wateraansluiting
- A1** = Calda - Heiss - Warm - Chaude - Caliente - Warm
- A2** = Fredda - Kalt - Cold - Froid - Fria - Koude
- EN ISO 228-1 G 3/4**
- E** Pressacavo entrata linea elettrica
 Stopfbuchse - Electric cable stress relief
 Presse étoupe de câble él. - Pisacable
 Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection -
 Arrivée gaz - Union de gas - Gasaansluiting
- EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)**
- S1** Scarico acqua - Wasserablauf - Water outlet
 Vidange de l'eau - Desaguadero
 Wateraftapaansluiting
 1 1/2"

DIRECT GAS COOKER LT.50

Project:
Rev:
Zone:
Location:



CODICE
CR0990139

MODELLO
D73/10PGD05

SERIE
DIAMANTE70

Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

Possibility of hot or cold water loading



Stainless steel tank with aisi 316 bottom



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



DIRECT GAS COOKER LT.50

Project:
Rev:
Zone:
Location:



CODICE
CR0990139

MODELLO
D73/10PGD05

SERIE
DIAMANTE70

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	9C5	
MA97348000	9CV5	
CR0599730	7C8	
CR0599740	7CV8	
MA97349000	9-I5	
CR0592789	ZF6	
CR0592830	ZG	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0599649	7ZL	