

# STGRF12 TOWER COUNTER SERIES CHILLED

COSSIGA

STGRF12-SD






PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors
- Solid front or sliding front doors
- Deck forced refrigeration
- Two adjustable shelves - flat or angled
- Ticket strips on shelves and base

Maximum shelf load weight 15kg spread evenly

STGRF12

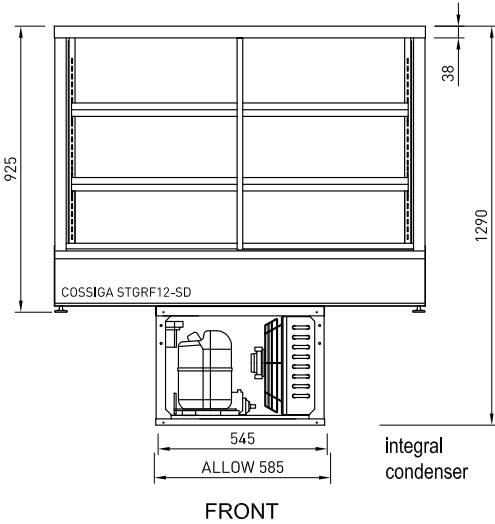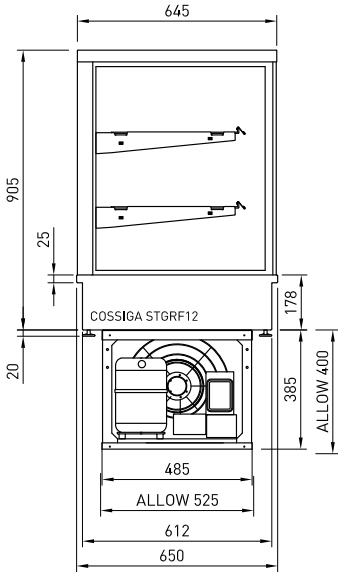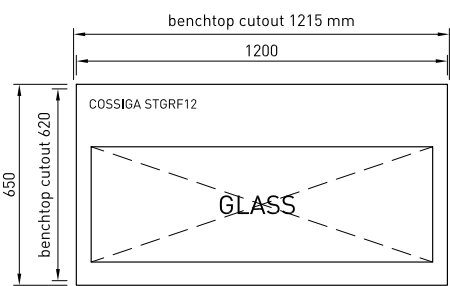

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| MODEL                 | CABINET        |               |                | SHELVING | SHELVING | OPERATING<br>TEMP | SHELF      | BASE<br>TRAY | TOTAL<br>FOOD | DISPLAY<br>M <sup>2</sup> | INTERNAL<br>VOLUME<br>M <sup>3</sup> | FREQUENCY | REFRIGERANT | POWER      |     | CONNECTION<br>ELECTRICAL POWER<br>CORD 2200MM |               | VOLTAGE      | PACKED FOR SHIPPING |               |                |        |
|-----------------------|----------------|---------------|----------------|----------|----------|-------------------|------------|--------------|---------------|---------------------------|--------------------------------------|-----------|-------------|------------|-----|-----------------------------------------------|---------------|--------------|---------------------|---------------|----------------|--------|
|                       | LENGTH<br>[MM] | DEPTH<br>[MM] | HEIGHT<br>[MM] |          |          |                   |            |              |               |                           |                                      |           |             | KW<br>230V | AMP | NZ/AUS<br>10 AMP                              | UK<br>13 AMP  |              | LENGTH<br>[MM]      | DEPTH<br>[MM] | HEIGHT<br>[MM] | WEIGHT |
| STGRF12<br>STGRF12-SD | 1200           | 650           | 925            | 212      | 2 + BASE | 3-5               | 1090 X 445 | 1140 x 415   | 175           | 1.32                      | 0.60                                 | 50/60 HZ  | R290        | 1.15       | 5.0 | 3 PIN<br>PLUG                                 | 3 PIN<br>PLUG | 220-<br>240V | 1300                | 730           | 1450           | 219    |