

**UTILITY CARTS, ENCLOSED****All Stainless Steel, Enclosed on Three Sides****"UCE" SERIES**

*Utility carts enclosed on three sides for secure storage, serving, and durability during transport*

- 1** Transport, serve, and store with FWE's heavy-duty UCE series enclosed Queen Mary utility carts - enclosed on three sides to protect less stable items such as dishes during transport or storage
- 2** All-welded construction with extra welds at critical points means lasting durability. The 16 gauge stainless steel shelves can easily transport your heaviest loads
- 3** Each stainless steel shelf has 6.5 to 9.5 square feet of working space. Models available with 3 to 6 shelf configurations
- 4** Easily transport over thresholds and various terrains - Large 8" EZ Roll polyurethane casters and heavy-duty base frame improve impact resistance, durability, and stability
- 5** Tubular push handles provide comfortable control
- 6** Full perimeter, non-marking bumper protects the unit and walls from dents and scratches
- 7** Quick and easy customization - custom sizing and shelf spacing are available to fit your unique operation

**\*Two year limited warranty****MODEL NOMENCLATURE**


Utility Cart, Enclosed    Space Between Shelves, In.  
**UCE** - **3** **15** - **62** Full Unit Width, In.  
 Number of Shelves



Heavy-Duty Welded  
Stainless Steel Construction



Tubular Welded Base Frame



Large EZ Roll Casters





Custom Sizing and  
Spacing Available

**STAINLESS STEEL**

SPECIFICATIONS

UTILITY CARTS, ENCLOSED

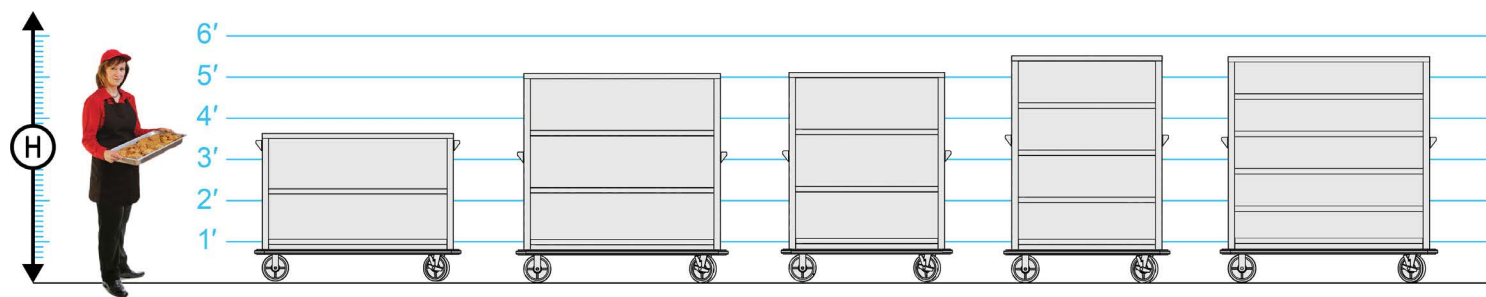

| MODEL NUMBER | NUMBER OF SHELVES [A] | SHELF CLEARANCE (mm) | SHELF SIZE (mm)              | OVERALL EXTERIOR DIMENSIONS IN. (mm)<br>(Height Includes Casters) |           |            | CONSULT FACTORY FOR SHIPPING CLASS |                    |
|--------------|-----------------------|----------------------|------------------------------|-------------------------------------------------------------------|-----------|------------|------------------------------------|--------------------|
|              |                       |                      |                              | HIGH "H"                                                          | DEEP "D"  | WIDE "W"   | CASTER SIZE                        | SHIP WT. LBS. (KG) |
|              | 3                     | 15" (381)            | 53.5" x 23.75" (1358 x 603)  | 44.5" (1131)                                                      | 28" (712) | 62" (1575) | 8"                                 | 325 (148)          |
|              | 4                     | 15" (381)            | 53.5" x 23.75" (1358 x 603)  | 61" (1550)                                                        | 28" (712) | 62" (1575) | 8"                                 | 360 (164)          |
|              | 4                     | 15" (381)            | 41.5" x 23.75" (1054 x 603)  | 61" (1550)                                                        | 28" (712) | 50" (1270) | 8"                                 | 270 (123)          |
|              | 5                     | 12" (304)            | 39.75" x 23.75" (1010 x 603) | 65.5" (1664)                                                      | 28" (712) | 48" (1220) | 8"                                 | 320 (146)          |
|              | 6                     | 9" (228)             | 53.5" x 23.75" (1358 x 603)  | 64.25" (1632)                                                     | 28" (712) | 62" (1575) | 8"                                 | 450 (205)          |

[A] Number of shelves includes top surface.

**CONSTRUCTION.** Heliarc welded construction of stainless steel. Welded tubular base frame shall be 1.5" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing stress plates at corners. Three-sided enclosed 20 gauge stainless steel exterior.

**BUMPER.** Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking vinyl cushion. Shall be continuous, with corner cut-outs to facilitate cleaning.

**CASTERS.** 8" maintenance-free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded-in-place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

**PUSH BAR HANDLE.** Heavy-duty 1" diameter tubular stainless steel push handles.

**SHELVES.** Shelf made of heavy-duty I6 gauge stainless steel.

- SHELVES
- Custom shelf size & spacing
- Reinforced shelves
- CASTERS
- Upgraded casters
- 6 caster configuration
- DOORS
- Locking doors
- EXTRAS
- Top corner bumpers