

PROJECT:		
ITEM #		
MODEL #		
AIA #	SIS #	

CABINET CONSTRUCTION

20 Gauge Stainless Steel Door

Low Profile Vertical Door Handle

Heavy-Duty Cylinder LockStainless Steel Interior Door Liner

Hinged Front Shroud
Energy Saving Thermal Breaker
Stainless Steel Breaker Caps
3 Silver Freeze Wire Shelves

Expansion Valve Technology
Manager's Lockout Feature
Anti-Condensate Perimeter Heater
Variable Speed Compressor Technology

**Environmental Concerns** 

Hot Gas Condensate Evaporator

**Consistent Product Temperatures** 

REFRIGERATION

FEATURES

· Stainless Steel Exterior And Interior

Stay-Open Door Feature For Easy Product Loading

· One Piece, Snap-In Magnetic Door Gaskets

6" High Adjustable Stainless Steel Legs
8' Cord And Plug (see electrical data for details)

Full Electronic Control With Touchpoint Interface

Magnetic Door Switch Automatically Activates Interior LED Light

Refrigeration System Uses R-290 Refrigerant To Comply With All

Adaptive Defrost For Reduced Energy Consumption And More

Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
 Freezer Capable Of Maintaining Product Temperature -10°F

Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs

# **SOLID DOOR REACH-IN FREEZER**

## FS-1D-S1-HC



## **EXCLUSIVE WARRANTY**

- ▶ 7 Year Parts, Labor and Compressor
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)





## **OPTIONS & ACCESSORIES**

- Stainless Steel Case Back
- Stainless Steel Kick Plate
- Exterior Door Laminate
- Door Swing Orientation (at time of order)
- Additional Shelves
- Heat Shield (left, right)
- Tray Slides (type A & A/C)
- 3", 6" Casters Or 6" Seismic Legs
- FlexTemp Models Maintain Between 28°F And 38°F
- Correctional Package
- Remote Models\* (6" legs only) (refrigerant must be specified at time of order, see note)

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 | fax: (800) 253-5168 Sales@VictoryRefrigeration.com | VictoryRefrigeration.com


Rev. 10/1/24 Printed in U.S.A.







# FS-1D-S1-HC



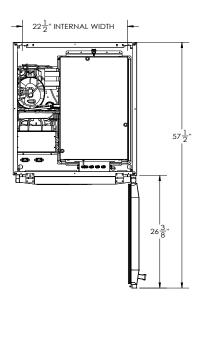

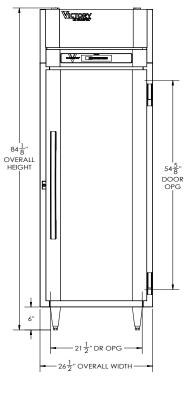

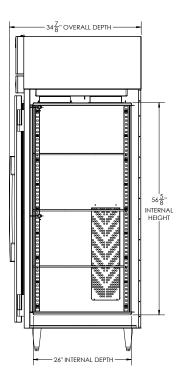

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

### 12" Top clearance is required

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	21.01	Cabinet Voltage**	115/60/1	Height	88″
Width, Overall (in.)	26 1/2"	Total Amperes	9.1	Width	35″
Depth, Overall (with handle)	34 7/8″	NEMA Plug (8' cord)	5-15P	Depth	41″
Height Overall (6" legs)	84 1/8″	REFRIGERATION DATA		Crated Weight	390 lbs
Depth, Door Open 90°	57 1/2"	Condensing Unit Size, HP	3/4	*NOTE: Remote units are field wired and comes with 6" legs. Refrigerant must be specified	
Door Opening (in.)	21 1/2' x 54 5/8"	Refrigerant	R-290		
No. Of Doors/Shelves	1/3	Capacity (BTU/HR) (100°F/-20°F)	2450		
		Heat Rejection (BTU/HR)	3675	at time of order.	
		Charge (Ibs/grams/ounces)	0.2866 / 130 / 4.59		

\*\* NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Victory recommends using either an Eaton, SCF20, or HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.

### 3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 Fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 10/1/24 Printed in U.S.A.

