



DISHWASHER SRC-3300IS6CV 400/50/3N

122/183 baskets per hour (up to 3.300 plates/hour)

1302616



SALES DESCRIPTION

Enhanced washing + double rinsing.
2 speeds.

- ✓ Fully stainless steel jacket.
- ✓ Inlet and outlet splash guards are standard.
- ✓ Stainless steel central rack feed system.
- ✓ Process cycles are divided by rubber curtains.
- ✓ Automatic cycle start.

Economy

- ✓ Energy saving rinse supply switch.
- ✓ Pressure controller in the rinse section to limit consumption.
- ✓ Programmed automatic stops if there is no loading.
- ✓ Stop and freezing of timer when the limit switch actuates.

Cleaning and maintenance

- ✓ Wide pivoting door allowing access for cleaning or inspection purpose.
- ✓ Detachable arms and dispersers for easier cleaning.
- ✓ Sloped removable stainless steel filters with independent removable basket.
- ✓ Easy boiler emptying by loosening a hose.
- ✓ Failures are easily detected thanks to the warning lights.
- ✓ Easy to repair without moving the machine.

Washing

- ✓ Stainless steel wash arms and deep-drawn dispersers.
- ✓ Efficient and durable wash arm dispersers.
- ✓ Powerful, self-draining vertical wash pump.
- ✓ Easy to install detergent dispenser intake in washing tank. Rinsing

Rinsing

- ✓ Stainless steel rinse arms and powerful, stainless steel, deep-drawn dispersers.
- ✓ Automatic boiler filling with no failure risk for heating elements.
- ✓ Temperature control with high precision probes.
- ✓ Visualization and adjustment of washing and rinsing temperatures in the digital display by pressing a button.
- ✓ Easy to install rinse aid dispenser intake in boiler.

INCLUDES

- ✓ Inlet and outlet splash guards are standard.

ACCESSORIES

- ☐ Drying units
- ☐ Manual water softeners
- ☐ Automatic water softeners
- ☐ 500 x 500 mm. baskets
- ☐ Inserts, supplements & similar
- ☐ Loading table for corner situation for rack conveyor dishwashers
- ☐ Central sorting tables
- ☐ Double connection central sorting table
- ☐ Single exit tables
- ☐ Roller conveyor and corner roller conveyor
- ☐ Machined curve
- ☐ CA Extraction hood
- ☐ EV Extraction hood with motor
- ☐ CV Extraction hood with steam condensation
- ☐ Connecting tables for Pass-Through dishwashers and rack conveyors
- ☐ Drying unit for corner situation



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road
Troon Industrial Park
LE4 9LS - Leicester

uksales@sammic.com
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved



WARE WASHING
RACK CONVEYOR DISHWASHERS

product sheet
updated 07/10/2020



DISHWASHER SRC-3300IS6CV 400/50/3N

122/183 baskets per hour (up to 3.300 plates/hour)



1302616

SPECIFICATIONS

Production

- ✓ Production baskets/hour: 122 / 183
- ✓ Production plates/hour: 2196 / 3294

Wash

- ✓ Temperature: 55 °C - 65 °C
- ✓ Wash tank capacity: 100 l
- ✓ Pump: 3.5 Hp / 2600 W
- ✓ Wash heating element: 9000 W

Pre-rinse

- ✓ Temperature: 65 °C - 75 °C
- ✓ Pre-rinse basin capacity: 15 l
- ✓ Pump: 0.2 Hp / 150 W
- ✓ Pre-rinse heating element: 6000 W

Rinse

- ✓ Temperature: 80 °C - 90 °C
- ✓ Water consumption: 330 l/h
- ✓ Rinse heating element: 18000 W
- ✓ Boiler capacity: 20 l

Drag

- ✓ Drag motor power: 0.25 Hp / 180 W

Drying

- ✓ Air flow: 1300 m³/h
- ✓ Fan power: 1 Hp / 750 W
- ✓ Dryer heater element: 6000 W

Mist condenser

- ✓ Fan power CV (HP): 1 Hp
- ✓ Fan power CV (W): 750 W

Electrical supply: 400 V / 50 Hz / 3N ~
(69.3 A)

Loading

- ✓ Total installed power: 37770 W

External dimensions (WxDxH)

- ✓ Width: 2700 mm
- ✓ Depth: 829 mm
- ✓ Height: 1881 mm

Net weight: 410 Kg

Water Intake: 3/4 "


Drain diameter: 1 1/2 "

Noise level (1m.): 71 dB(A)

Crated dimensions

980 x 3100 x 1940 mm

Gross weight: 512 Kg.

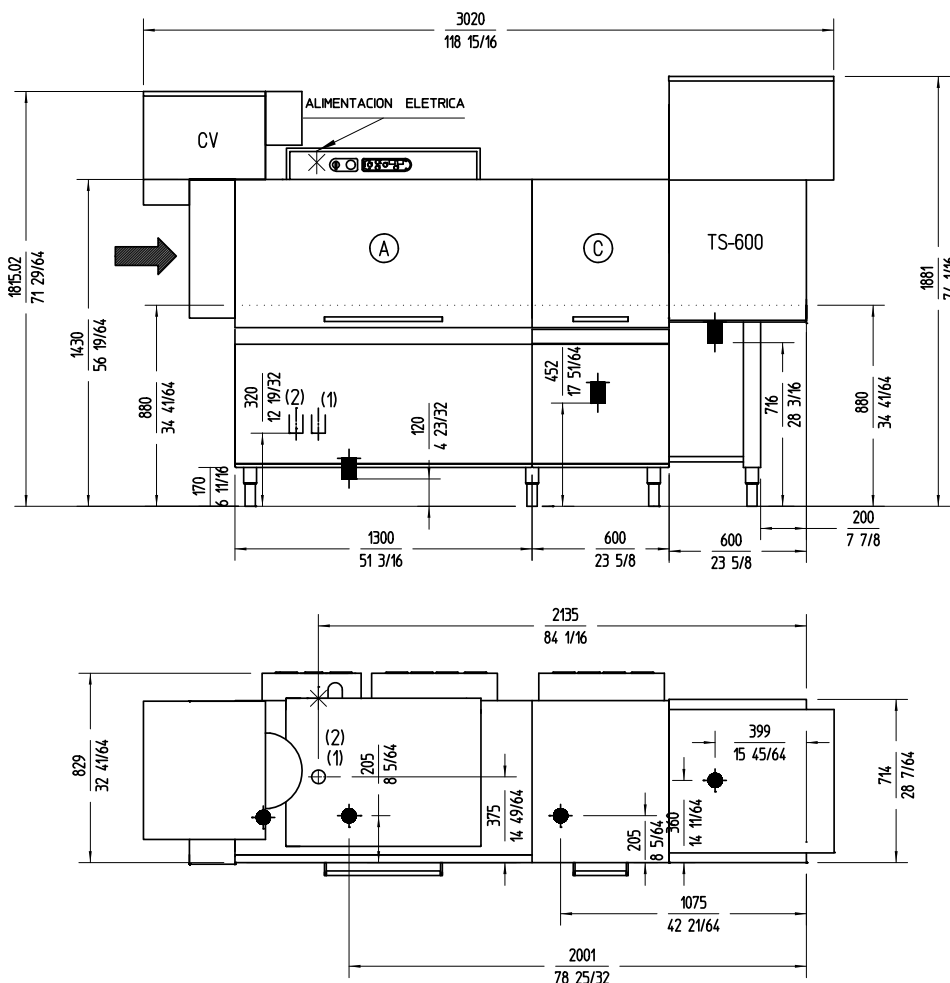

WARE WASHING
RACK CONVEYOR DISHWASHERS



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road

Troon Industrial Park

LE4 9LS - Leicester

uksales@sammic.com

Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet
updated 07/10/2020