
Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

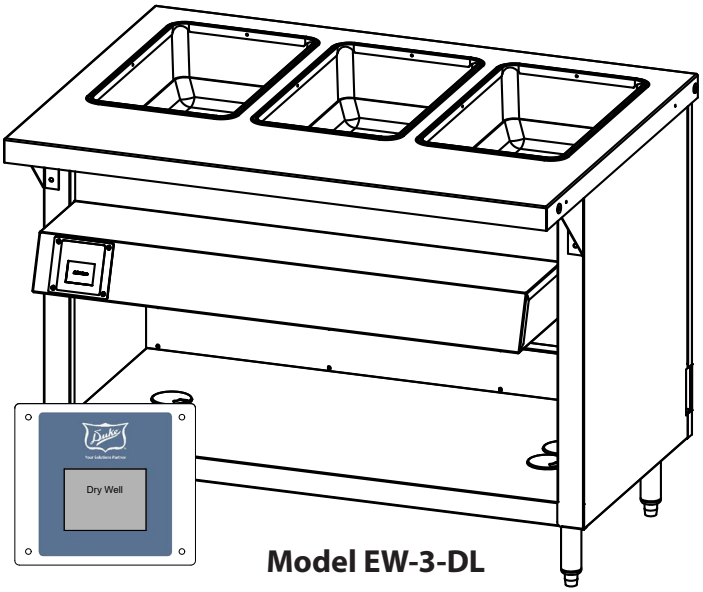

Model EW-3-DL

OPTIONS:

- ❑ 14 gauge tops
- ❑ Backsplash
- ❑ Recessed top (to accommodate griddles, fryers, etc.)
- ❑ Adaptor plates
- ❑ Three-phase wiring
- ❑ 6', 8' or 10' Cord and plug
- ❑ Heated base module
- ❑ Sliding Doors
- ❑ Pass-thru construction
- ❑ Veneered plastic laminate panels on body
- ❑ Casters (add cord and plug), 5" swivel with locks
- ❑ Foodshields
- ❑ Trayslides
- ❑ Workshelves
- ❑ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34"

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:
Thurmaduke® Ganged Waterless Well
Hot Food Units - Electric - Deluxe

❑	EW-2-DLPG/EW-2-DLSS	2 top openings
❑	EW-3-DLPG/EW-3-DLSS	3 top openings
❑	EW-4-DLPG/EW-4-DLSS	4 top openings
❑	EW-5-DLPG/EW-5-DLSS	5 top openings
❑	EW-6-DLPG/EW-6-DLSS	6 top openings

TOP:
- ■ 16 gauge, 300 Series stainless steel
- ■ Die-stamped openings 11 7/8" x 19 7/8"
- ■ Integral carving/work surface

Heat Compartments:
- ■ 6 ½" deep wells Dry operation only
- ■ Includes Silicone bottom pad
- ■ Fully Insulated
- ■ Rope Element in each compartment
- ❑ 120, 208 or 240 volt A/C
- ■ Single Phase standard

BODY AND INTERIOR SHELF:
- ❑ Stainless Steel body
- ❑ Painted body
- ■ Full bottom shelf to match body
- ■ 6" polished stainless steel adjustable legs

INTEGRAL DISHSHELF:
- ■ Heavy gauge, one piece stainless steel - 8-1/2" wide

CONTROLS:
- ■ Standard intuitive, easy to use touch screen control – One control for all wells
- ■ Easily adjusted presets LOW/MED/HIGH
- ■ Built in WIFI and Bluetooth for future connectivity

AGENCY LISTINGS:

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Specification subject to change

WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning


A.I.A. File No. 35-C-13


Catalog No. Waterless Well

THURMADUKE® Ganged Waterless Well - Deluxe


Thurmaduke®


Ganged Waterless Well Deluxe

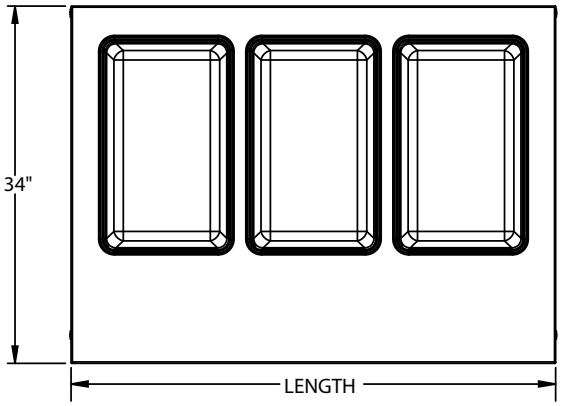


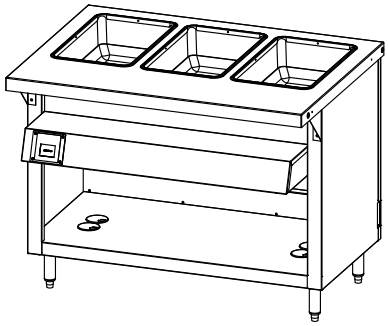


Control Specifications

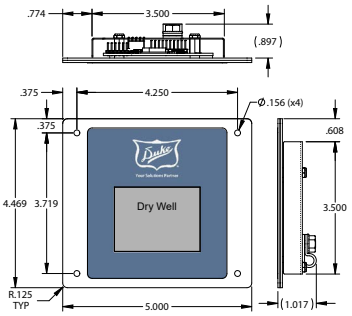

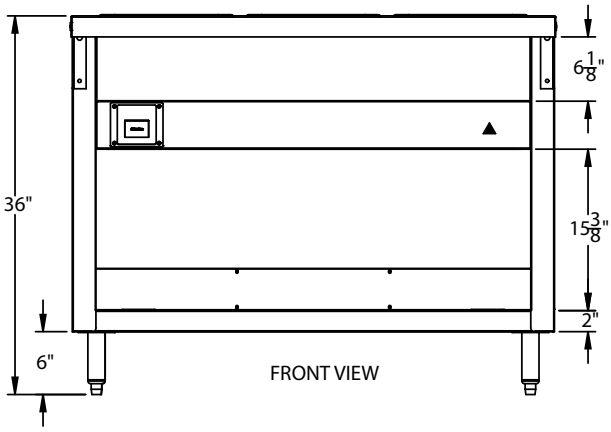

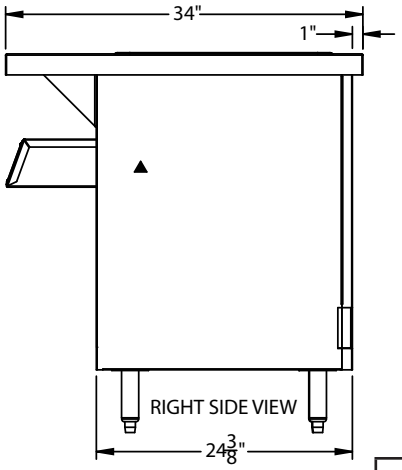

Control Cutout

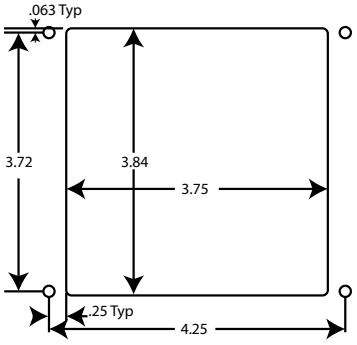

LEGEND
▲ ELECTRICAL CONNECTION

DIMENSIONS:

FREIGHT CLASS: 150

Model		Length		Width		Height		Top	Cube ft.	Weight	
Enameled	Stainless	in	cm	in	cm	in	cm	Openings	Crated	lbs	kg
EW-2-DLPG	EW-2-DLSS	32	81.3	34	86.4	36	91.4	2	27.0	255	115.9
EW-3-DLPG	EW-3-DLSS	46	116.8	34	86.4	36	91.4	3	38.1	335	152.3
EW-4-DLPG	EW-4-DLSS	60	152.4	34	86.4	36	91.4	4	49.2	410	186.4
EW-5-DLPG	EW-5-DLSS	74	188.0	34	86.4	36	91.4	5	60.2	495	225.0
EW-6-DLPG	EW-6-DLSS	88	223.5	34	86.4	36	91.4	6	71.3	595	270.5

ELECTRICAL SPECIFICATIONS:

	120V 665W			208V 500W			240V 665W		
Model	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
EW-2-DLPG/SS	1414	11.8	5-15	1084	5.2	6-20	1414	5.9	6-20
EW-3-DLPG/SS	2083	17.4	L5-30	1588	7.6	6-20	2083	8.0	6-20
EW-4-DLPG/SS	2748	22.9	L5-30	2088	10	6-20	2748	11.5	6-20
EW-5-DLPG/SS	3417	28.5	5-50	2592	12.5	6-20	3417	14.2	6-20
EW-6-DLPG/SS	N/A			3092	14.9	6-20	4082	17.0	L6-30

Cord and NEMA plug NOT included

Duke Your Solutions Partner

Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A.
© 2025, Duke Manufacturing Co.