

Combi steamer

**FlexiCombi®**

Gas combi steamer FlexiCombi® MagicPilot 6.2 MAXI

MKN-No.: FKG COD621TG2



world of cooking

## Features

- **MagicPilot®** – touch and slide operating concept  
robust, wear-free, capacitive true colour touch screen,  
protected behind anti-reflective safety glass;  
display cleaning mode
- **MKN Guided Cooking** with autoChef®, ChefsHelp,  
VideoAssist, Favourites and BarcodeScan
- **autoChef®** – automatic cooking
- More than 250 preselected international cooking  
processes which can be individually modified
- More than 1200 cooking processes can be saved
- **Overview of individual favourites** on the start screen
- Cooking process protection against modification/deletion
- Adjustable language settings, full text search
- **ChefsHelp** – user information  
Insertion of information into text and graphics where  
required during the cooking process
- **VideoAssist** – interactive user assistance with clips  
featuring professional chefs
- Start cooking process with **BarcodeScan** in autoChef®
- **Manual operation concept** with 12 cooking modes:  
SoftSteaming, Steaming, ExpressSteaming, Convection,  
CombiSteaming, Perfection, low temperature cooking, ΔT,  
Sous vide, humidification, baking and rest function
- Cooking Steps function – up to 20 programme steps can  
be individually combined
- **WaveClean®** – automatic cleaning system
- **Integrated shower hose**
- **SES** – Steam Exhaust System,  
steam extraction for safe operation
- MFB digital forced air burner technology
- **CombiDoctor** – self diagnosis programme  
automatic self-test for all relevant appliance functions such  
as climate and cleaning functions
- **FamilyMix** – efficient utilization of the cooking chamber  
capacity. Products which can be cooked in the same  
cooking chamber climate are indicated in a clearly  
arranged list showing which products belong together.
- **MultiCook** – Intelligent cooking time control
- **QualityControl** – consistent high quality; perfect results  
every time regardless of the load quantity
- **Hygienic cooking chamber door with  
sealed triple glazing**, right hand hinged door
- LED lighting integrated into the hygienic cooking chamber  
door
- **Hygienic cooking chamber** of corrosion resistant  
stainless steel
- WLAN\*\* (Wireless Local Area Network)

## Accessories

- Hanging rack, standard configuration, 6 shelf inserts for  
GN 2/1, with tilt protection for containers, distance bet-  
ween insert levels 65 mm



FKG COD621TG2



## Option

- Left hand hinged door
- Two position safety door lock
- Additional external multi-point core temperature probe  
(can not be retrofitted; can be used at the same time as  
an internal multipoint core temperature probe)
- Additional external sous vide single point sensor (can not  
be retrofitted)
- Prison version
- Special voltage
- SmokeInside – integrated smoking function
- ETHERNET interface
- MKN Grease Collection System
- MKN SteelPlus – CO<sub>2</sub>e-reduced stainless steel  
(Scope 1, 2, 3)\*\*\*

## Product safety



\*\* in all certified countries




\*\*\* Further information at: [www.mkn.com/en/sustainability/mkn-steelplus](http://www.mkn.com/en/sustainability/mkn-steelplus)

Combi steamer  
**FlexiCombi®**  
 Gas combi steamer FlexiCombi® MagicPilot 6.2 MAXI  
 MKN-No.: FKG COD621TG2



world of cooking

FKGCOD621TG2

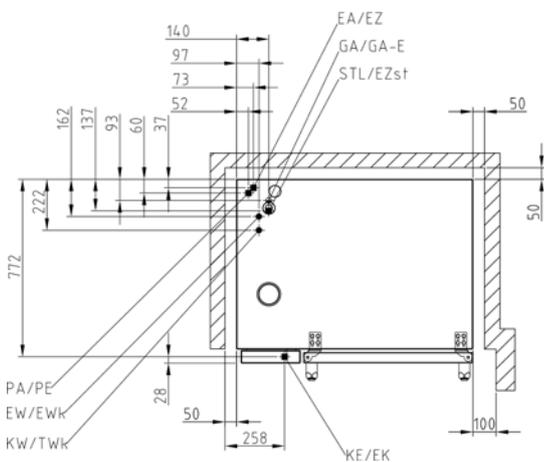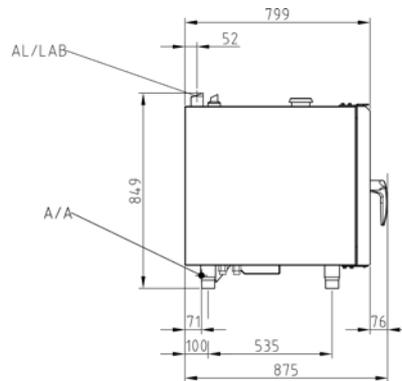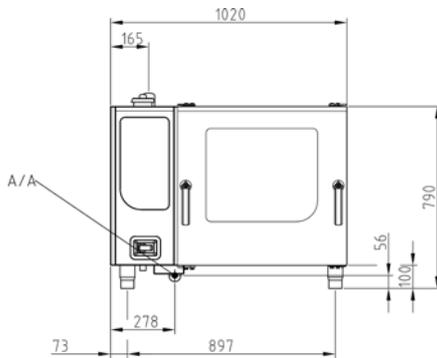

Please find detailed information at  
[www.mkn.com/en/login](http://www.mkn.com/en/login)

## General installation interfaces

### Interfaces provided on site

- Electricity connection (EA/EZ)
- Gas connection (GA/GA-E)
- Connection to cold water mains (KW/TWK)
- Soft water (EW/EWK)
- Waste water connection (A/A)
- Exhaust air (AL)

Appliance dimensions (LxWxH) (mm)	1020 x 799 x 790
Housing material	1.4301
Dimensions with grease collection system (LxWxH) (mm)	1520 x 899 x 790
Dimensions incl. packing (LxWxH <sup>2</sup> )(mm)	1020 x 1220 x 1090
Net weight (kg)	132
Gross weight (kg)	152
max. load weight (kg)	72
Installation instructions; safety clearance in mm	
at the rear	50
left and right respectively	50
recommended clearance at the rear of grease collection system	152
recommended clearance on the left of grease collection system	500
recommended clearance for service purposes	500
when the rack trolley is parked on the left	800
Clearance to heat sources on the left	500
Clearance to deep fat fryers on the left and right respectively	at least the length of the hand shower

# Combi steamer

## FlexiCombi®

### Gas combi steamer FlexiCombi® MagicPilot 6.2 MAXI

MKN-No.: FKG COD621TG2



world of cooking

FKGCOD621TG2

Capacity	
Shelf inserts	6
GN 1/1 (530 x 325 x 65 mm)	12
GN 2/1 (530 x 650 x 65 mm)	6
FlexiRack® (530 x 570 x 65 mm)	6
Plates (Ø 28 cm on FlexiRack® grids)	24
Plates (Ø 32 cm – plate rack trolley)	22
Meals per day	60 - 160

Electricity supply (220 - 240 V)	
Nominal power consumption (kW)	0.6
Voltage (V)	220 - 240 1 (N)PE AC
Fuse protection (A)	1 x 16
Frequency range (Hz)	50 / 60

Electricity supply (120 V)	
Nominal power consumption (kW)	0.6
Voltage (V)	120 1 (N)PE AC
Fuse protection (A)	1 x 16
Frequency range (Hz)	50 / 60

Electricity supply (100 V)	
Nominal power consumption (kW)	0.6
Voltage (V)	100 1 (N)PE AC
Fuse protection (A)	1 x 16
Frequency range (Hz)	50 / 60

Gas connection (GA/GA-E)	
Rated heat load (kW)	17
Type of gas	E & LL; 3B/P
Standard gas pressure – natural gas <sup>3</sup> (mbar)	20; 25
Standard gas pressure – liquid gas <sup>3</sup> (mbar)	30; 37; 50
Consumption rate according to DIN (kg/h)	1.34
Consumption rate according to DIN (m <sup>3</sup> /h)	2.05

Drinking water cold (KW/TWk)	
Water pressure (bar)	2 - 6
Connection size	DN 20 (G ¾" A)
Quality mmol/l	< 4
Consumption cleaning (l)	32

Soft water (EW/EWk)	
Water pressure (bar)	2 - 6
Connection size	DN 20 (G ¾" A)
Quality mmol/l	< 0.9
Consumption steaming (l/h)	21
Consumption combisteaming (l/h)	4.6
Consumption cleaning (l)	3

Waste water (A/A)	
Volume flow max. (l/min)	10
Connection size	DN 50
Quality	max. 80 °C

Exhaust air (AL)	
Exhaust gas mass flow (kg/h)	47
Exhaust gas discharge system	B13 (with) B23 (without flow safeguard)
Exhaust gas connection	to a ventilation system with safety shutdown
Exhaust gas temperature (°C)	230

According to VDI 2052 with a connection voltage of 400 V.	
Operated without steam condensate hood	
Heat emission latent (W)	3060
Heat emission sensitive (W)	2550
Steam output (g/h)	4505
Operated with FlexiCombi® Air condensation hood	
Heat emission latent (W)	918
Heat emission sensitive (W)	2550
Steam output (g/h)	1352
Noise level (db (A))	< 70
Type of protection	IPX5

<sup>3</sup> other types of gas on request

Combi steamer  
**FlexiCombi®**  
 Gas combi steamer FlexiCombi® MagicPilot 6.2 MAXI  
 MKN-No.: FKGCOD621TG2



world of cooking

FKGCOD621TG2

### Further features

- One hand door handle
- Non-contact door switch, door lock positions with end stop
- Insertable door seal – end user replaceable
- Drip pan with permanent drainage
- **DynaSteam** – dynamic process-oriented steam quantity adjustment depending on product load
- Dynamic autoreverse fan for extremely uniform cooking results
- 5 fan speeds programmable, even 10 speeds in connection with fan intervals
- Fan safety brake
- Integrated grease separation system
- Manual cleaning programme with user guide
- Maintenance instructions for external water filters
- **Time2Serve** – enter the required completion time
- **RackControl** – multiple timer
- **ClimaSelect® plus** – Climate control in steps of 10 %
- **Ready2Cook** – preheating, cooling down, climate preparation
- **PerfectHold** – keep warm function with SmartCoolDown
- Internal multipoint core temperature measurement (up to 99 °C)
- **Integrated heat exchanger**
- **MKN FlexiCombi® Connect** – PC software equipped as standard to compile cooking processes, for visualisation, storage and printing of HACCP data
- Integrated HACCP memory
- **Professional baking function** – to set baking programmes with humidity injection in ml, a rest period and dehumidification
- Manual steam injection/humidification
- Timer with start time pre-selection and real time display
- USB interface, e.g. for software updates\*\*
- Cooking process import function using a USB stick
- Display flashes after cooking time has elapsed
- Loudspeaker, adjustable tone control
- Audible signal after cooking time has elapsed
- Potential free contact for external steam condensate hood
- Direct waste water connection according to DVGW is possible
- Siphon is included with the appliance

### Special equipment

216232	Cabinet frame open on all sides (1000 x 655 x 850 mm)
216251	Cabinet closed on three sides (1000 x 696 x 850 mm)
FKG_AIR_6_10	FlexiCombi® Air condensation hood
845986	Stacking kit for gas table top appliances (6.x + 10.x / 6.x + 6.x)
216243	Cabinet frame open on all sides, 270 mm high (6.x + 6.x)

### GN 2/1 trays (please refer to accessories brochure)

202388	Granite enamelled tray, 20 mm deep
10017317	Granite enamelled tray, 40 mm deep
202390	Granite enamelled tray, 65 mm deep
202383	Baking tray – perforated Roasting tray
202386	Roasting tray – non-perforated
206103	Grid
202065	Container, non-perforated, 20 mm deep
202070	Container, non-perforated, 40 mm deep
202066	Container, non-perforated, 65 mm deep
202072	Container, non-perforated, 100 mm deep
202380	Container, perforated, 40 mm deep
202381	Container, perforated, 60 mm deep
202382	Container, perforated, 95 mm deep

FK_BANQUET_6	Complete Perfection banquet system consisting of plate rack, roll-in frame, transport trolley rack and thermal cover
--------------	--

10014181	Barcode scanner including USB cable for charging
TWO_IN_ONE	WaveClean two-in-one cleaning cartridge

846061	Flow safeguard (exhaust gas duct)
--------	-----------------------------------

### Special equipment MKN Grease Collection System:

10032350	Starter set for GCS
10032215	Transport trolley for 2 collection containers 20 l
10032236	Collection container 20 l with screw cap
10032237	Closure: Outlet tap with ball valve 3/4" incl. seal for collection container
10032579	Additional collection tray with drain filter

\*\* without surcharge under <https://shop.mkn.de>

MKN Maschinenfabrik  
 Kurt Neubauer GmbH & Co. KG  
 Halberstaedter Strasse 2a  
 38300 Wolfenbuettel / Germany

Phone +49 (0)5331 89-0  
 Fax +49 (0)5331 89-280  
 E-mail [export@mkn.de](mailto:export@mkn.de)  
[www.mkn.com](http://www.mkn.com)



Please find detailed information at [www.mkn.com/en/login](http://www.mkn.com/en/login)

Subject to technical modifications!  
 Version: 1.10.2024