Fusion

GP Combination Prep Case

Structural Concepts®
DELIVERING FRESH. ALWAYS.™

- **GP441RRLB** 51"L x 52-1/4"D x 55-3/8"H
- **GP541RRLB** 62-7/8"L x 52-1/4"D x 55-3/8"H
- **GP641RRLB** 75-3/8"L x 52-1/4"D x 55-3/8"H
- **GP841RRLB** 99-3/4"L x 52-1/4"D x 55-3/8"H
- **GP1041RRLB** 123-1/4"L x 52-1/4"D x 55-3/8"H



GP641RRLB

Included

- Remote DX refrigeration
- 12" & 16" Solid shelving
- LED top & shelf lights
- One year parts & labor warranty
- Refrigerated rear storage
- Sanalite® cutting board
- Stainless steel rear exterior
- Warmest average product temperature of 40°F or less

Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Laminate (stock colors)	• Laminate (non-stock colors) • Powder coated (stock/non-stock colors) • Powder coated Silversan Black • Stainless steel
INTERIOR COLOR	• Powder coated Silversan Black	• Stainless steel
LOWER FRONT PANEL COLOR	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel
BASE SUPPORT	• Rail system for shims (remote)	
BUMPER FRONT	• 1" Boston bumper (specify color)	• 1" Stainless steel plate rail bumper
END PANEL PROFILE	• Curved	• Flat angled
END PANELS	• Full w/stainless steel mirror interior	• None (specify per line-up)
CONDIMENT PANS	• None	• 1/6 size stainless steel pans w/ lids
PRICE TAG MOLDING	• None	• 1" Price tag molding (black or silver) • Universal price tag molding (clear w/ open top)
SNEEZE GUARD	• Clear glass w/ stainless steel ADM posts	• Frameless clear glass
LIGHTS	• LED 3500K w/ frosted lens	• LED 4000K w/ frosted lens
NOSE LIGHTS	• None	• LED nose light
ELECTRICAL CONNECTION	• Electrical leads (remote)	
REFRIGERATION	[1] • Remote DX refrigeration	[1] • Remote w/thermostat, solenoid & TXV
SENSOR	• None	• CPC discharge air sensor (remote)
ACCESSORIES		• Drain strainer • Night curtain, retractable, non-locking • Removable wire security cover, locking

Std Notes: 1 - Read important notes for remote options

Option Notes: 1 - Read important notes for remote options


Fusion


GP Combination Prep Case

Structural Concepts
DELIVERING FRESH. ALWAYS.™


Intended Environment:	Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
Zone	**Intended Product To Be Displayed**	**Warmest Avg Prod Temp ° F**
1	Packaged / unpackaged refrigerated products-Prechilled to Warmest Avg Prod Temp.	40


PLAN VIEW

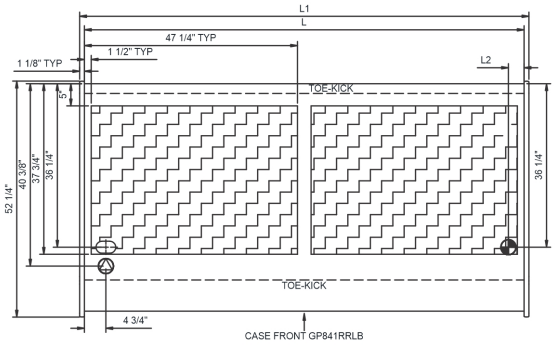


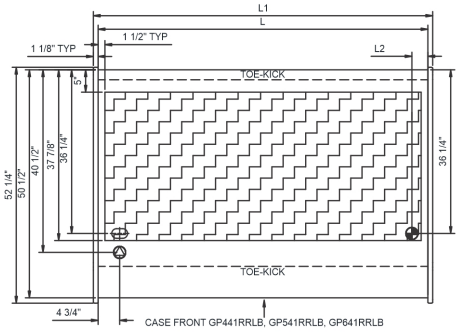

SIDE VIEW

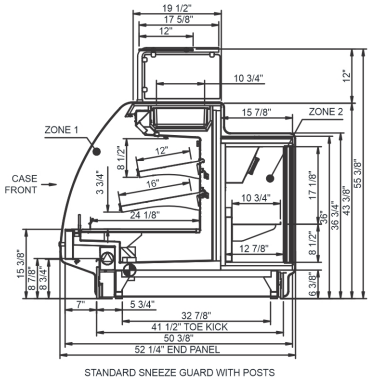

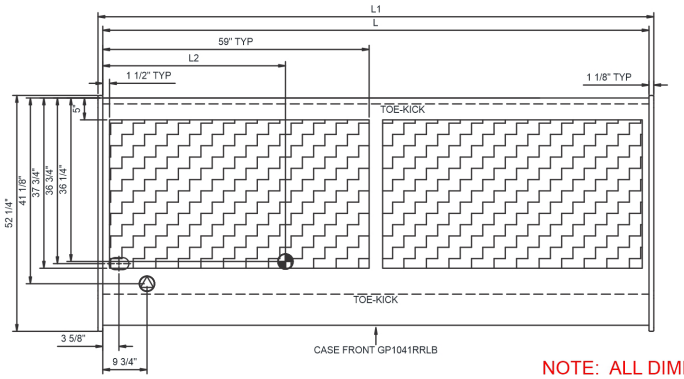

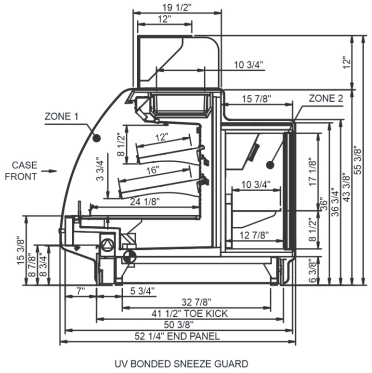

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH $\frac{3}{4}$" OR 1$\frac{1}{2}$" PVC TUBE).
REFRIGERATION LINE CONNECTION.
REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
SELF-CONTAINED CASE SERVICE ACCESS AREA.
DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
GP441RRLB	48.75	51.00	3.50	Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	3.27	266	2+G	Leads Multiple	20.00	5184	4800	700
				Remote (R404A)	Circuit #1	110-120	1	60	3.27	266	2+G	Leads Multiple	20.00	5184	4800	
GP541RRLB	60.63	62.88	3.50	Remote (DX)	Circuit #1	110-120	1	60	5.27	308	2+G	Leads Multiple	20.00	6091	5640	1,000
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	4.47	303	2+G	Leads Single	20.00	6091	5640	
GP641RRLB	73.13	75.38	3.50	Remote (DX)	Circuit #1	110-120	1	60	4.06	209	2+G	Leads Multiple	20.00	7603	7040	1,375
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	4.14	414	2+G	Leads Multiple	20.00	7603	7040	
				Remote (R744 TRANSCRIT	Circuit #1	110-120	1	60	4.76	209	2+G	Leads Multiple		7603	7040	
GP841RRLB	97.50	99.75	3.50	Remote (DX)	Circuit #1	110-120	1	60	5.86	656	2+G	Leads Multiple	20.00	10109	9360	1,400
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	5.86	656	2+G	Leads Multiple	20.00	10109	9360	
GP1041RRLB	121.00	123.25	40.50	Remote (DX)	Circuit #1	110-120	1	60	7.97	367	2+G	Leads Multiple	20.00	9504	8800	2,000

*** Does not include electric defrost on freezer models.

Regulatory Approvals:	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7

In Accordance with AHRI Std 1200

DOE 2017 Energy Efficiency Compliant

Important Notes:

1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
3) 55" minimum door entry clearance required (without shipping skid).
4) Units must be shimmed during installation to ensure unit is level and plumb.
5) Pans are not supplied with unit.

⚠ **WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Placement of Case

Consider where the display case will be positioned relative to walls, ceilings, HVAC vents, windows, and other equipment discharging warm air.

The 5′ - 10′ - 15′ Rule

Stay 5′ away from an exterior window

Direct sunlight increases the heat load on the front of the display resulting in the refrigeration system having to work harder and possible condensation on the case.

Remain 10′ away from HVAC ceiling vents

Air blowing on the front of the display interrupts the air curtain and causes product temperatures to increase.

Minimum 4″ clearance to walls & ceilings.
Refer to spec sheets & design guide for further information.

With service display cases that have a glass front, air blowing on the front glass causes condensation to develop.

Position the display 15′ away from exterior doors

Air drafts from the front exterior doors interrupt the air curtain, allowing warm air to penetrate the inside of the display, affecting product temperature.

