

Nat 5



CAPACITY

5 TRAYS GN 1/1 H20 - H40 - H65

10 TRAYS GN 1/1 H20

10 TRAYS EN 60x40 - 10 GRIDS GN 1/1

+90 | 23 kg **+90** | 18 kg
▼+3 **▼-18**

PROGRAMS

Blast chilling Shock freezing

Fish sanitizing Thawing

Pre-cooling Ice cream hardening

Bottle cooling. Hot gas defrosting.

Cabinet drying. Cabinet sanitizing

VERSIONI

 **S** Plug-in air condensing unit

 **R** Without condensing unit

 **W** Plug-in water condensing unit

CONSTRUCTION FEATURES

Adaptive 7" touch screen controller

Monocoque construction.

Internal and external construction in AISI 304 stainless steel.

Stainless steel feet adjustable in height.

Door gasket resistant to minimum reaching temperatures.

Cabinet profiles and door profiles resistant to minimum temperatures.

Technical compartment placed under the cabinet.

Condensing unit placed in the technical compartment, removable and easily inspectable.

Electrical panel with connectors, removable and easy to inspect.

Multi-level adjustable stainless steel AISI 304 tray holder, suitable to hold GN 1/1 and EN 60x40 trays. Easily removable structure for cleaning operations.

Internal cell with rounded corners to facilitate cleaning operations.

CFC-free high density polyurethane insulation.

Evaporator with cataphoresis rust protection.

Left side door hinge.

Heated door perimeter to avoid frost formation.

FUNCTIONS

Probe cycles: the core probe temperature controls the cycle ensuring control and precision.

Time cycles: the set duration controls the cycle.

Timer cycles: 6 different timers can be set that automatically warn when the set duration is reached.

Cascade cycles with multiple probes installed: the cycle allows to set a different target temperature for each installed core probe.

Cascade cycles with one probe installed: this is a single-phase cycle with infinite time that allows different foodstuffs to be treated continuously without the need to act on the controller.

Quick start: it is possible to choose a preferred cycle for quick start.

Possibility to choose between factory preset cycles or to modify all the parameters of each cycle.

Customizable multiphase cycles.

Possibility to modify the parameters also during the current cycle.

Rename of the display probes, to better distinguish the temperatures of each food.

Graph of the temperatures during the current cycles.

Recipe book for saving your favorite cycles.

HACCP data storage with the possibility of downloading via usb key.

STANDARD EQUIPMENT



n° 1 multi-point core probe.



AISI 304 stainless steel tray holder for GN 1/1 and EN 60x40.



Stainless steel feet adjustable in height.



Condensing tray, placed on the bottom of the machine.

OPTIONAL EQUIPMENT



Ozone generator for cabinet sanitization cycles.



Predisposition for 4 core probes (1 probe included).



Additional core probe.



Door with hinge on right side.





Kit of casters.

Technical data	S	R	W
Cooling capacity (Evap. -10°C / Cond. 45°C)	2042 W	-	2042 W
Cooling capacity requested	-	2069 W	-
Liquid line	-	1/4" [6] mm	-
Suction line	-	3/8" [10] mm	-
Condensation	autonomo aria	remoto	autonomo acqua
Refrigerant gas	R452A	R452A	R452A
GWP	2141	2141	2141
Climate class	4	4	4
Power supply (Ph / Volts / Hz)	220-240/1N/50	220-240/1N/50	220-240/1N/50
Max. power consumption cold cycles	1491 W - 7.3 A	190 W - 1.02 A	1411 W - 6.92 A
Blast chilling (+90 °C, +3 °C)	23 kg	23 kg	23 kg
Shock freezing (+90°C, -18°C)	18 kg	18 kg	18 kg
Internal dimensions (wxpxh)	650 x 433 x 410 mm	650 x 433 x 410 mm	650 x 433 x 410 mm
External dimensions (wxpxh)	750 x 864 x 970 mm	750 x 864 x 970 mm	750 x 864 x 970 mm
Capacity (liter)	115 L	115 L	115 L
Packaging dimensions	800 x 890 x 1124 mm	800 x 890 x 1124 mm	800 x 890 x 1124 mm
Packing volume	0.8 m ³	0.8 m ³	0.8 m ³
Gross weight	129 kg	111 kg	129 kg

EN22042

+65°C +10°C	kWh/Kg	0,091	+65°C -18°C	kWh/Kg	0,322
	Min.	96		Min.	261
	Kg	18		Kg	13



GASTRONOMIA / GASTRONOMY

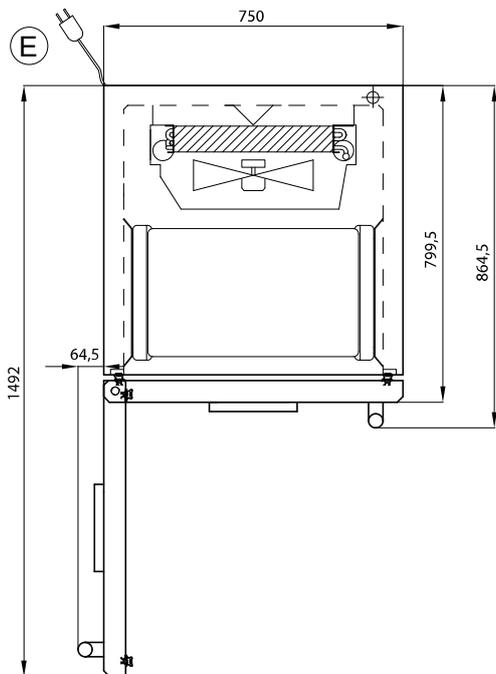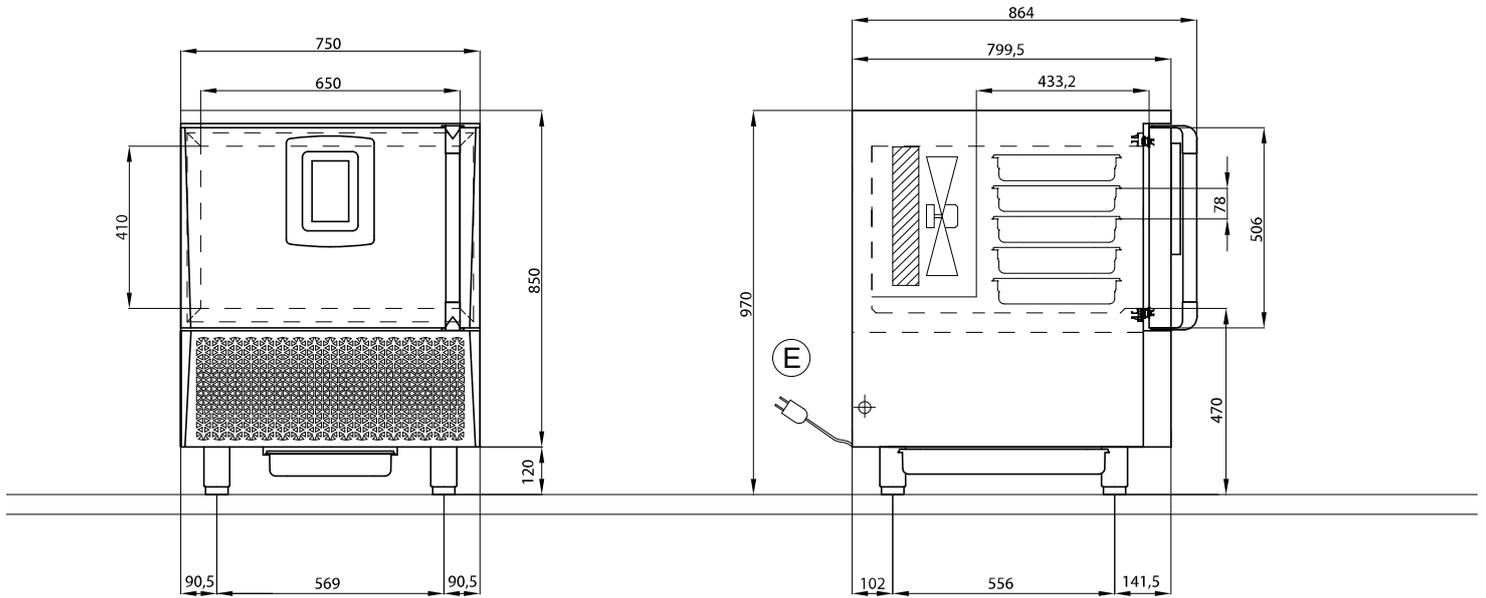

 H MIN 120
H MAX 165

 CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION



PASTICCERIA / PASTRY

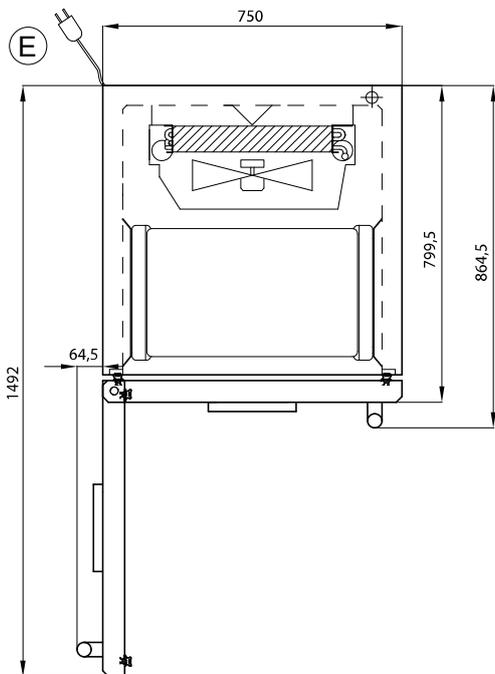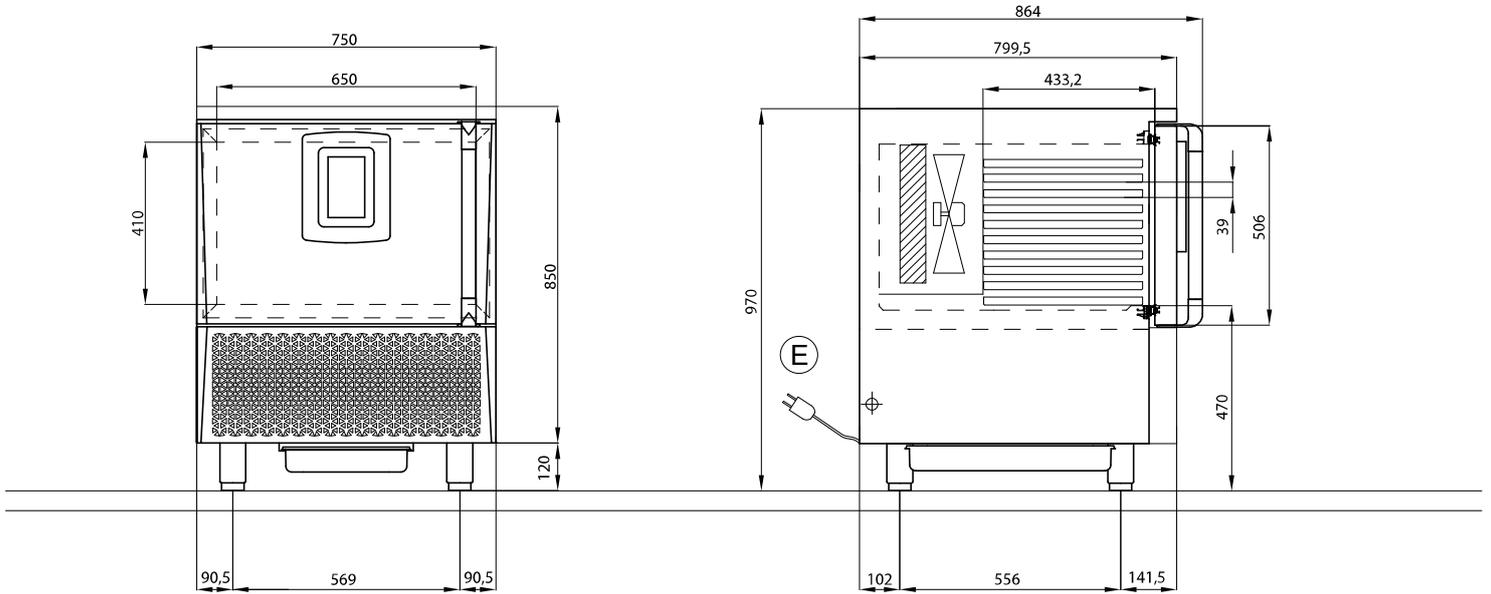

 H MIN 120
H MAX 165

 CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION

GELATO / ICE CREAM

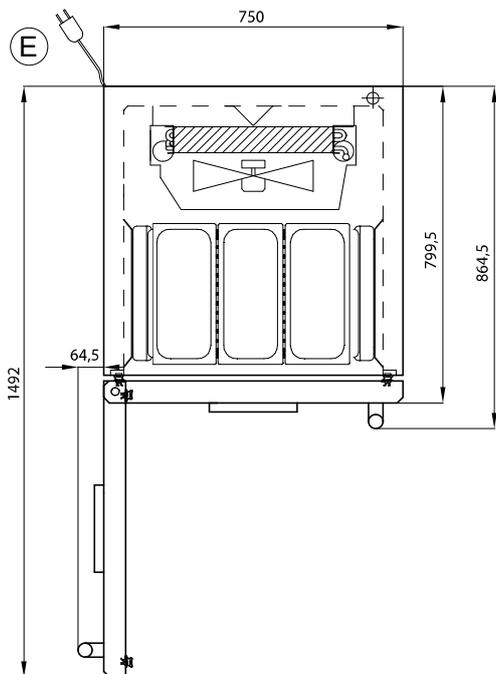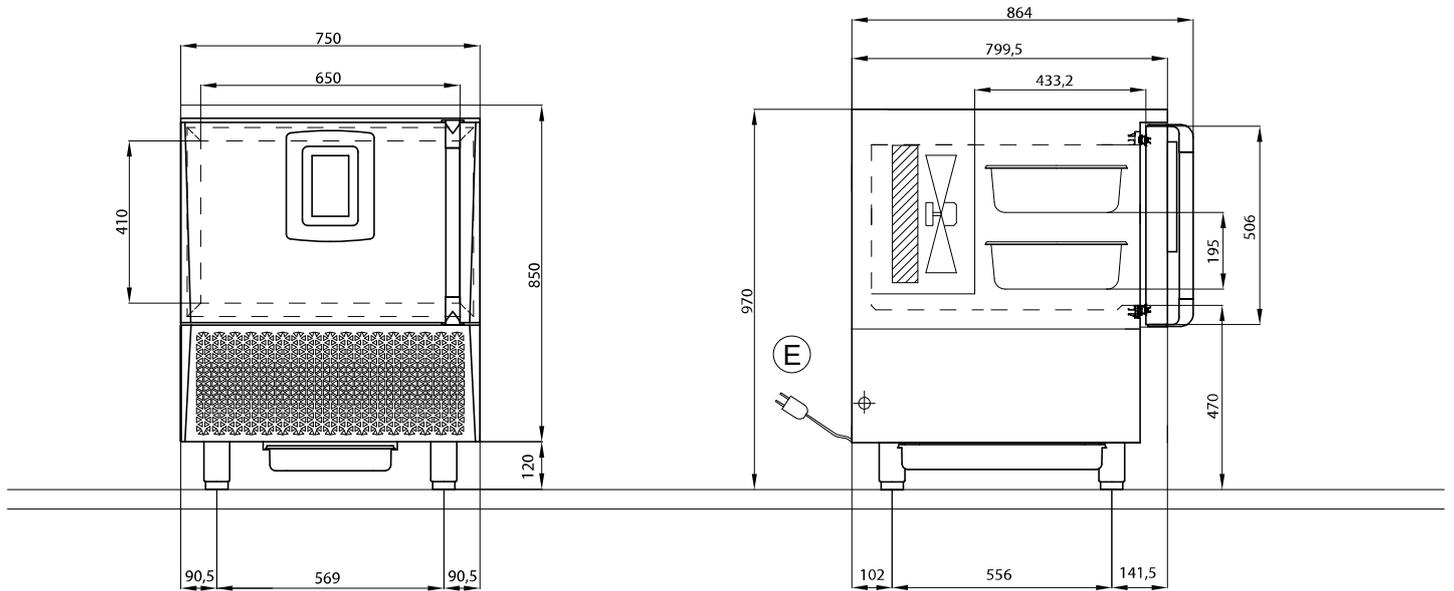

 H MIN 120
H MAX 165

 CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION