



# BEVERAGE-AIR®

PROJECT: \_\_\_\_\_  
 ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
 APPROVED: \_\_\_\_\_

## UNDERCOUNTER REFRIGERATORS

### Model: UCRD67AHC-2

TWO DRAWERS / ONE DOOR / SIDE-MOUNTED



### 7 YEAR WARRANTY Parts, Labor, and Compressor

#### CABINET CONSTRUCTION

- Stainless steel front, sides, top, door, drawers and grille (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing door with 120° stay-open feature, on cartridge style hinges
- Door opening includes low wattage, anti-condensate heaters
- Magnetic gasket attached to each door for positive seal
- Two (2) epoxy-coated steel wire shelves
- Field-reversible door (hinge kit not included)
- Snap-in drawer gaskets
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- 6" Casters, (2) with brakes standard



#### OPTIONS & ACCESSORIES

- |                                |                                                      |
|--------------------------------|------------------------------------------------------|
| • Stainless steel back         | • 3" Casters                                         |
| • Stainless steel interior     | • 6" Legs (stainless steel, black or seismic/flange) |
| • 16 Gauge stainless steel top | • Low profile casters                                |
| • Additional shelves           | • Roller kit                                         |
| • Shelf clips                  | • Remote option* (see note on back on page)          |
| • Right or left hinged door    |                                                      |
| • Lock (doors only)            |                                                      |
| • Wire shelf divider           |                                                      |

#### REFRIGERATION SYSTEM


- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F




# BEVERAGE-AIR®

## Undercounter Refrigerators Model: UCRD67AHC-2


PLAN VIEW

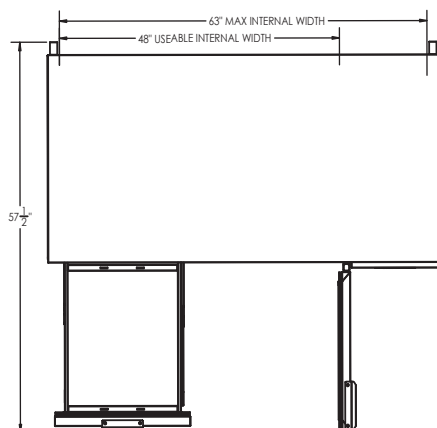

ELEVATION VIEW

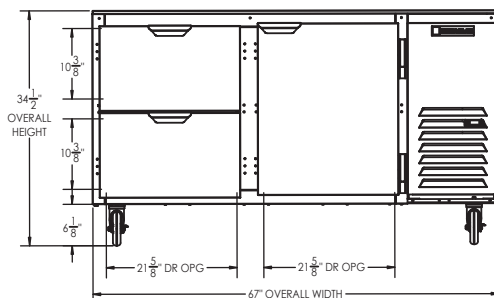

SIDE VIEW

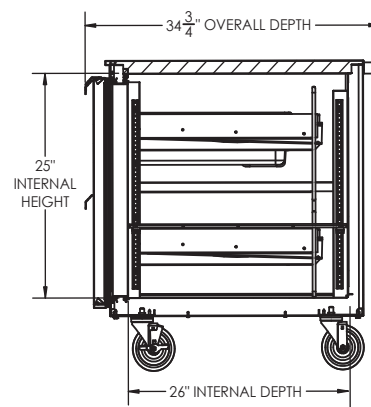

### EXTERNAL DIMENSIONAL DATA

|                            |                       |
|----------------------------|-----------------------|
| Width Overall (in)         | 67"                   |
| Depth Overall (in)         | 34 3/4"               |
| Height Overall (in)        | 34 1/2"               |
| Number of Drawers          | 2                     |
| Drawer Openings            | (2) 21 5/8" x 10 3/8" |
| Number of Doors            | 1                     |
| Depth with Drawer Extended | 57 1/2"               |

### INTERNAL DIMENSIONAL DATA

|                              |      |
|------------------------------|------|
| NET Capacity (cubic ft.)     | 19.2 |
| Internal Width Overall (in)  | 63"  |
| Internal Depth Overall (in)  | 26"  |
| Internal Height Overall (in) | 25"  |

### ELECTRICAL CONNECTION



115/601  
NEMA 5-15P

Unit pre-wired at factory  
and include 8' long cord  
and plug set.

### ELECTRICAL DATA

|                     |          |
|---------------------|----------|
| Full Load Amps      | 2.0      |
| Voltage             | 115/60/1 |
| Nema Plug (8' cord) | 5-15P    |

### REFRIGERATION DATA

|                           |                    |
|---------------------------|--------------------|
| Horsepower                | 1/5                |
| Capacity (BTU/Hr)         | 1350               |
| Heat Rejection (BTU/Hr)   | 2025               |
| Charge (lbs/grams/ounces) | 0.243 / 110 / 3.89 |

### SHIPPING DATA

|                       |          |
|-----------------------|----------|
| Gross Weight - Crated | 395 lbs. |
| Height - Crated (in)  | 40"      |
| Width - Crated (in)   | 70"      |
| Depth - Crated (in)   | 35"      |

\*NOTE: Remote units are field wired and come with 6" legs.  
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Required Clearance: 3" Bottom & 2" Rear

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 9/26 | Printed in U.S.A.