

Warewashing green&clean multi-rinse Rack Type, Energy Saving Device, ZERO LIME Device, electric, 150r/h, L>R

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



535017 (EMR15NELEW)

Multi Rinse Rack Type Dishwasher, 150 racks/hour, electric, Left>Right, Energy Saving Device, constant rinse, self cleaning, ZERO LIME Device, CLEAR BLUE Filtering System, WASH-SAFE CONTROL, touch screen, variable speeds, insulated doors, WRAS/ Watermark a

Short Form Specification

Item No.

Unit to be Electrolux multi-rinse rack type dishwasher. Operating direction __ left to right or __ right to left. Featured built-in Energy Saving Device (ESD) recovers the heat inside the machine to heat up incoming cold water to the boiler. ZERO LIME device automatically de-scales the whole hydraulic circuit and all washing & rinsing chambers. Multi-rinse area with built-in Wash-Safe Control system and rinse booster pump guarantees constant rinse pressure. CLEAR BLUE filtering system removes majority of soil from the wash water to ensure clean water for long time. Maximum Water Contact (MWC) wash arms are positioned along the full length of the wash tank. Powerful wash pump and specially designed wash spray arms guarantee cleaning. Washing is done with water circulating at 55-65°C. Final rinsing is done with clean water heated up to 85°C that is re-used in several phases in pre-rinse at around 70°C. Multi-rinse with double rinse tanks and multi rinse arms re-uses rinsing water several times to ensure hygiene on washed wares. Constant 0.4 liter/ rack rinse water consumption of cold water in any conveyor speed. Three conveyor speeds are selectable by the operator, one for maximum capacity, one compliant to DIN 10510 and one certified according to NSF/ANSI 3. Intuitive touch screen control panel provides easy communication on different levels. Large counter-balance door in all tanks has heat and noise insulation with easy internal access. Easy drain of water done through control panel. Standard end of the day self cleaning cycle and sanitation cycle both including internal side of the door. Modularity allows split delivery, customization and upgrade on-site and over time.

Main Features

- ZERO LIME Device as a fully automatic cycle ensures total scale removal from the boiler, the hydraulic circuit, the washing chamber and the rinsing chamber allowing ultimate performances and lower energy consumption thanks to highly efficient heating elements.
- Built-in Energy Saving Device (ESD) utilizes the hot steam generated by the machine in the rinse and wash tanks to heat up incoming cold water up to 55°C before entering the boiler, thus saving energy.
- Multi-rinse technology guarantees rinse water consumption of 0.4 liters/rack regardless of the conveyor speed to ensure low energy, water, detergent and rinse aid consumption.
- CLEAR BLUE filtering system removes soil from the wash water providing cleaner water and highly active detergent thus ensuring better washing performance and lower running costs.
- Built-in WASH-SAFE CONTROL system raises water temperature to 85°C to sanitize the rinse water. No external boiler is required. Built-in air break and rinse booster pump ensure constant temperature and pressure throughout the rinsing cycle regardless of the inlet water condition.
- Maximum capacity per hour of 150 racks easy to switch to DIN 10510 or NSF ANSI 3 compliant speed.
- Three conveyor speeds can be selected through the control panel by the operator and customized on site.
- Maximum Water Contact (MWC) wash arms are positioned along the full length of the wash tank.
- Multi-rinse arms in combination with double rinse tanks re-use final rinsing water in several phases to ensure hygiene and complete detergent removal on the washed wares.
- Auto-start/stop equipped in different zones ensures that the zone runs only when a rack is passing through it. This reduces water, energy, chemical consumption and noise.
- Built-in drain valve in the tanks allows automatic dump and fill to refresh the water in the tank without any interruption of the washing process.
- Intuitive touch screen control panel features user-friendly display to easily operate the machine and to monitor machine status. Three different levels of interaction are available each show relevant messages and information to the operator, the general maintenance staff and the authorized service partners.
- Automatic drain, clean and sanitize cycles featured as standard. The internal chambers, including the internal doors are completely cleaned or sanitized avoiding bacteria proliferation for maximum hygiene and reducing manual work/ time for operator.
- Self-draining wash pumps provide maximum hygiene and all wash and rinse zones drain automatically at the push of a button.
- All internal components: wash and rinse arms, tank filters, curtains can be easily removed for cleaning.
- IP25 protection against water jets, solid objects and small animals (larger than 6 mm).

APPROVAL: _____

- Large counter balanced inspection doors allow unrestricted all-round access to the wash and rinse area. Door is insulated with injected foam. This adds strength as well as reduces noise and heat loss.
- Adjustable feet for full access underneath the machine for cleaning.
- Splashhood at the entrance avoids water spilling outside the machine.
- Unit equipped with USB port making it simple to read data such as machine identification, counters and consumption, components, devices and alarm logs. Machine parameters can be uploaded and downloaded and firmware updated.
- Automatic back-up mode is activated when a failure occurs. Guided troubleshooting for fast fixes including 300 precises notifications and 23 easy-to-follow processes.

Construction

- Modularity design allows the machine not only be disassembled for delivery and re-assembled at customer's site, but also to be customized and upgraded on-site and over time.
- All main components made in heavy duty anti-corrosive 304 type stainless steel: external front, side panels and internal chambers, wash and rinse arms, doors and rack transportation system.
- Dishwasher structure is held together with a solid 50 x 50 mm stainless steel frame to provide long-term sturdiness.
- All electric components are put in one IP65 central box isolated from water and steam to ensure high reliability.
- External pre-arrangement for inlet water, drain water, detergent & rinse aid connections for fast and easy installation on both sides of the unit.
- Deep drawn pressed wash tank with fully rounded corners, sloped towards the drain to prevent dirt build up provides fast drainage in only a few minutes. Pressed wash tank with no welded points offer a guaranteed water tight solution.
- The unit is built on modularity concept for easy to add pre-wash, wash and up to 2 dryer modules onsite.
- All chambers without internal pipes and therefore no hidden dirt traps.

Included Accessories

- 1 of Kit splash hood for rack type with ESD PNC 865280
- 1 of Kit delime for rack type PNC 865282

Optional Accessories

- Medium hot air blower zone without door for Electrolux green&clean Multi Rinse Rack Type Dishwasher PNC 534056 ☐
- Corner drying zone for Electrolux green&clean Multi Rinse Rack Type Dishwasher PNC 534057 ☐
- Medium pre-wash zone for Electrolux green&clean Multi Rinse Rack Type Dishwasher with Energy Saving Device, ZERO LIME Device, WRAS/Watermark approval PNC 535036 ☐
- Large pre-wash zone for Electrolux green&clean Multi Rinse Rack Type Dishwasher with Energy Saving Device, ZERO LIME Device, WRAS/Watermark approval PNC 535037 ☐
- Medium drying zone with door for Electrolux green&clean Multi Rinse Rack Type Dishwasher PNC 535038 ☐
- Large drying zone with door for Electrolux green&clean Multi Rinse Rack Type Dishwasher PNC 535039 ☐
- Kit end limit switch for Rack Type dishwasher PNC 864138 ☐
- Kit of 12 stainless steel plugs for washing arms for multi-rinse and compact rack type PNC 864239 ☐
- Kit to adapt motorized table with green&clean Rack Type - Europe, UK, M. E., Africa, Asia, Latin America, Oceania PNC 865232 ☐
- Connection bracket for plain undershelf and grid undershelf (to be used if roller conveyor is connected directly to Rack Type Dishwasher with splash hood) PNC 865235 ☐
- Inclined extension table for roller conveyor PNC 865253 ☐
- Inclined extension table for splash hood PNC 865254 ☐
- Kit splash hood for rack type with ESD PNC 865280 ☐
- Kit water softener for Rack Type dishwasher PNC 865284 ☐
- Kit water meter PNC 865286 ☐
- Kit electronic connection for motorized table and remote pre-wash module PNC 865290 ☐
- Kit of splash panel to change on the splash hood for 90° and 180° curve table PNC 865291 ☐
- Lateral panel (to be used instead of splash hood on Rack Type with ESD) PNC 865489 ☐
- HACCP cable connection for Rack Type dishwasher PNC 865490 ☐
- Kit water softener and reverse osmosis for Rack Type Dishwasher PNC 865494 ☐

Electric

Supply voltage:

535017 (EMR15NELEW) 380-415 V/3N ph/50 Hz

Default Installed Power: 27.8 kW

Electrical power min: 20.8 kW

When the machine runs at DIN 10510 compliant speed.

Energy consumption: 24.7 kWh

At average working conditions.

Wash tank heating

elements: 14 kW

Triple tank heating

elements: 7 kW

Boiler heating elements: 3.5 kW

Wash pump size: 1.5 kW

Rinse pump size (final, duo, triple): 0.55 / 0.32 / 0.32 kW

Water:

Inlet water line size: G 3/4" / G 3/4"

Inlet cold water line size: G 3/4"

Drain line size: 50mm

Inlet water supply pressure: 1.5-6 bar

Inlet water supply temperature (wash and rinse):

5 - 65°C

The higher the temperature, the faster the warm-up.

Recommended temperature: 50°C.

Inlet water supply

temperature (rinse and pre-wash):

5 - 30 °C

Inlet water supply hardness: 0-14 °fH / 0-8°dH

Flow rate of wash pump: 500 l/h

When below 7°fH/4°dH special detergent and rinse aid are needed.

Peak rate of drain flow: 1.8 l/s

Wash tank size: 70 l

Duo rinse tank size: 20 l

Triple rinse tank size: 20 l

Rinse water consumption: 0.4 l/rack constant

Rinse water consumption at max. speed: 60 l/h

Key Information:

Productivity per hour (max. speed): 150 racks/2700dishes

Productivity per hour (DIN compliant speed): 114 racks/2052 dishes

Productivity per hour (NSF compliant speed): 96 racks/1728 dishes

Wash Temperature: 55 - 65 °C

Duo rinse temperature: 75-80 °C

Final rinse temperature: 85 °C

Triple rinse temperature: 70 - 75 °C

External dimensions, Width: 2080 mm

External dimensions, Height: 1785 mm

External dimensions, Depth: 895 mm

For transportation purpose only, the depth can be reduced to 795mm by removing the control box and the door handles.

Height with door open: 2095 mm

Charging hole size (width): 530 mm

Charging hole size (height): 490 mm

Net weight: 395 kg

Shipping weight: 450 kg

Shipping height: 1980 mm

Shipping width: 1040 mm

Shipping depth: 2560 mm

Shipping volume: 5.27 m³

Noise level: <62 dBA

Reference norm used to measure the noise:

IEC60335-2-58 annex AA.

Table to table distance: 2080 mm

Air Emission:

Air flow (top, exit): 145 / 145 m³/h

Air temperature: 45 - 45 °C

Air humidity (top, exit): 100 / 100 % r.h.

The data is measured at exhaust points at 25°C and 60% r.h. ambient conditions, 18°C inlet water temperature and refer only to the machine.

Latent heat: 12300 W

Sensible heat: 5000 W

This model requires a ventilation hood. Please refer to the attached Recommended Exhaust Hood Design.



Warewashing

green&clean multi-rinse Rack Type, Energy Saving Device, ZERO LIME Device, electric,

150r/h, L>R

Technical drawing of a two-door refrigerator. The drawing includes dimensions and labels for various components.

Dimensions:

- Overall height: 2095
- Overall width: 1780
- Door height (left): 913
- Door height (right): 565
- Bottom height (left): 187
- Bottom height (right): 187
- Top height (left): 300
- Top height (right): 775
- Bottom width (left): 80
- Bottom width (right): 80
- Internal width (left): 798
- Internal width (right): 798
- Door width (left): 47
- Door width (right): 47

Labels:




- V (Vent)
- EO (Exterior Outlet)
- ES (Exterior Switch)
- XP (Exterior Panel)
- ES (Exterior Switch)
- D (Door)
- EI (Exterior Inlet)
- U (Upper)
- EO (Exterior Outlet)
- ES (Exterior Switch)
- EQ (Exterior Outlet)
- WI (Water Inlet)
- CWI (Cold Water Inlet)

Technical drawing of a staircase section showing dimensions and component labels. The drawing includes a staircase with a landing and a door. Dimensions are given in millimeters (mm). Labels ES, EO, EI, XI, XD, and XR point to specific components. The overall height is 1635 mm, and the overall width is 576 mm. The drawing also shows a door with a handle and a lock.

CWI = Cold Water Inlet
D = Drain
EI = Electrical inlet (power)
EO = Electrical Outlet
EQ = Equipotential screw
ES = Electrical signal IN/OUT
U = USB port
WI = Water inlet

Technical drawing of the front elevation of a kitchen unit. The drawing shows a unit with a total width of 1325 and a total height of 895. The unit is divided into sections with various components labeled: XI, XD, XD, XR (top left); EI, EI (top center); V, D (bottom left); EI (bottom center); WI, CWI (bottom right). Dimensions are provided for various sections: 653 (total height), 200 (top section height), 401 (middle section height), 103 (bottom left section height), 100 (bottom left section width), 2080 (total width), 330 (top right section height), 140 (middle right section height), 795 (bottom right section height), and 50 (top right section width).



RECOMMENDED HOOD DESIGN OPTIONS

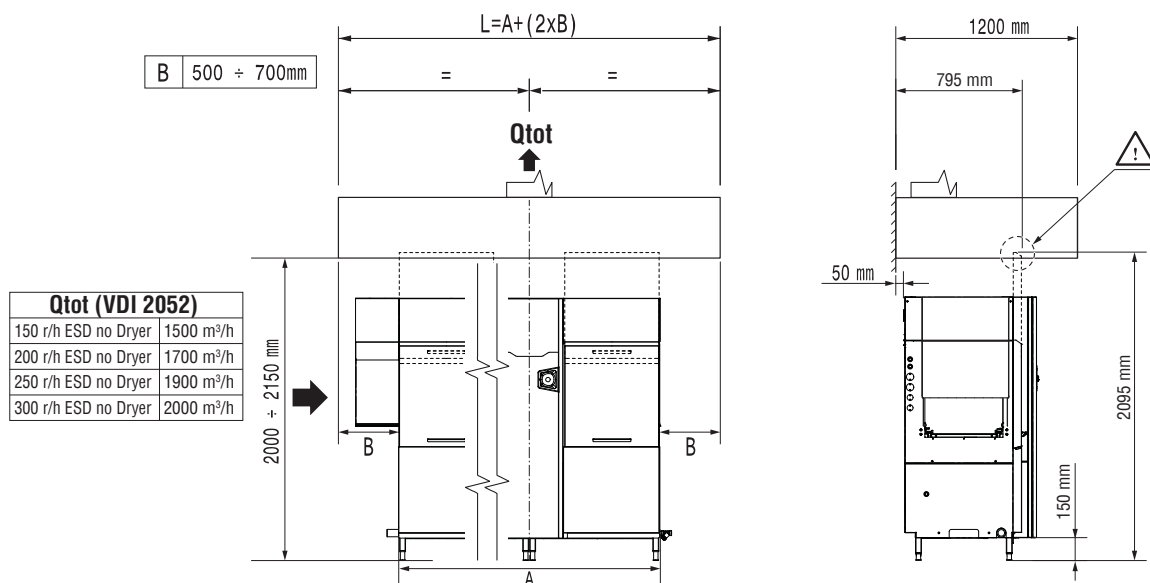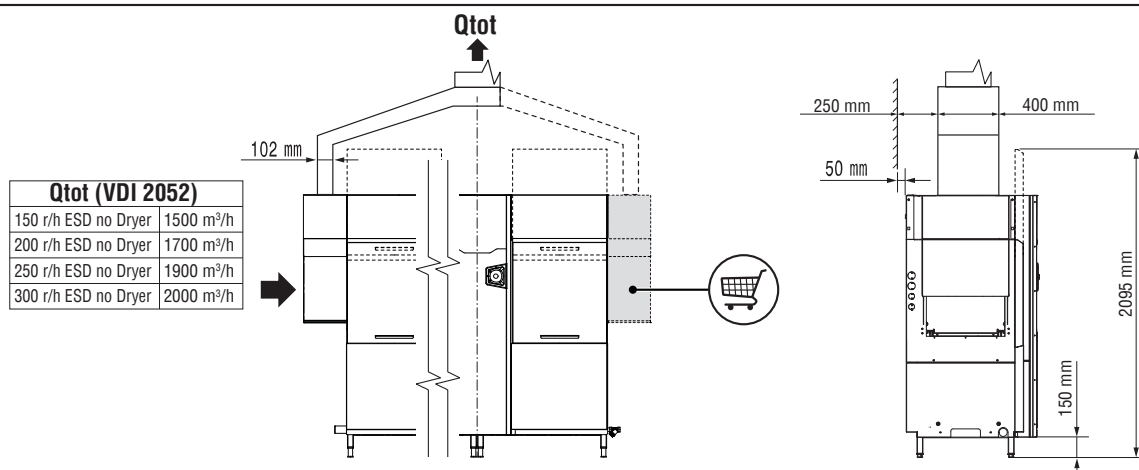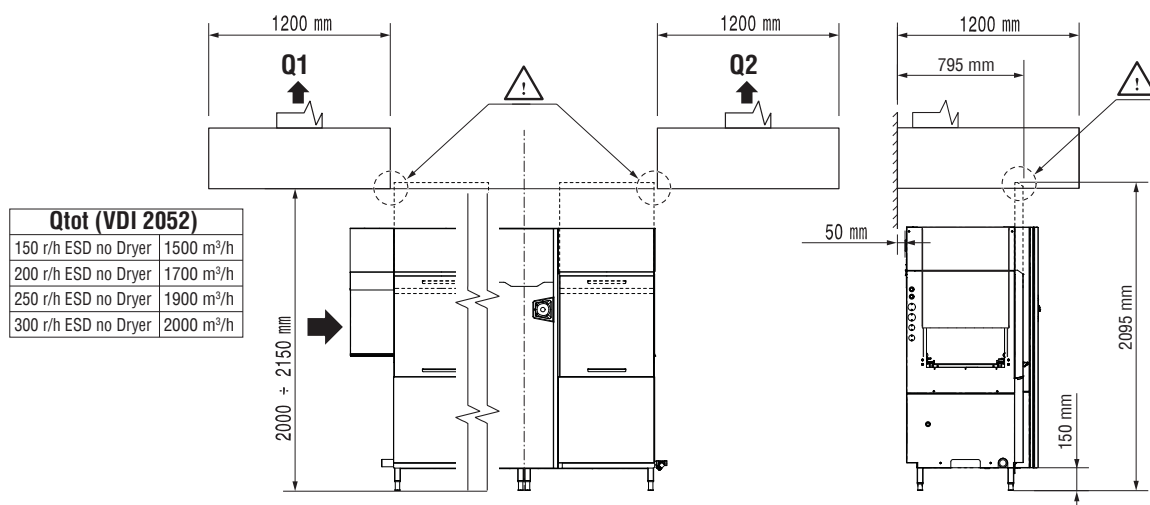

All exhaust hoods must be dimensioned and installed according to local regulations and industry standards which may differ from the recommendations herein suggested. Electrolux Professional is not liable for any failure in complying with local design standards.

DOC. NO. 59566N500
 EDITION 03.2017

RECOMMENDED TABLE CONNECTION

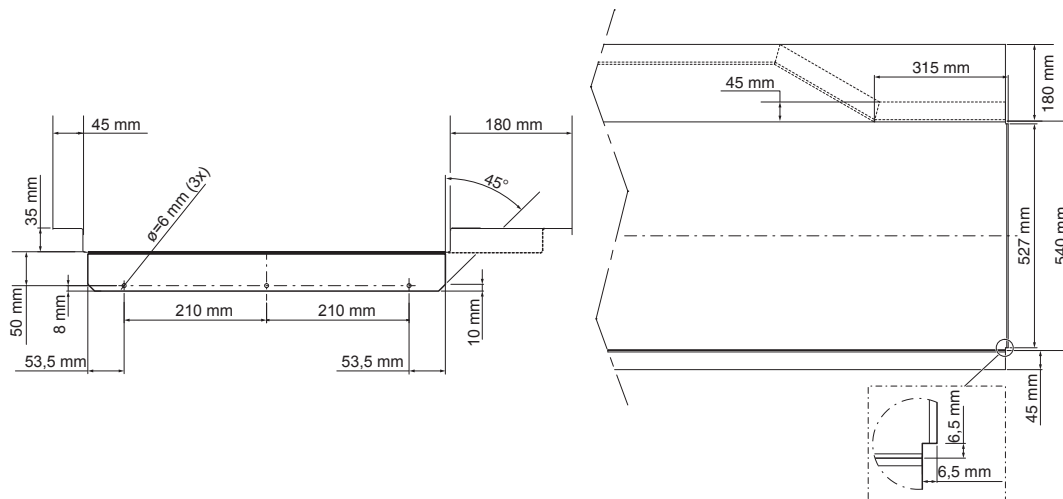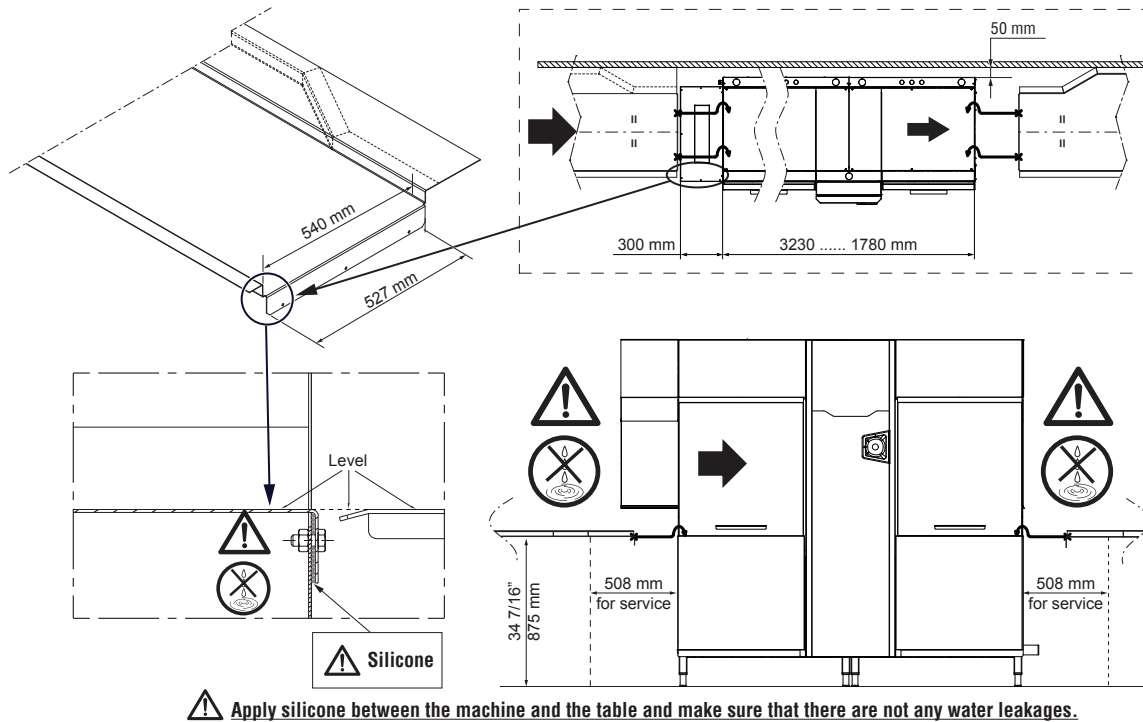

All tables must be connected to the dishwashing units according to local regulations and industry standards which may differ from the recommendations herein suggested. Electrolux Professional is not liable for any failure in complying with local design standards.

DOC. NO. 59566N600
 EDITION 02.2017