

# INDIRECT GAS COOKER LT.50 WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR1356059

MODELLO  
D73/10PGI05S

SERIE  
DIAMANTE70



## GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

## TECHNICAL SPECIFICATIONS

- Possibility of hot or cold water loading
- Stainless steel tank with aisi 316 bottom
- Indirect pans with automatic condensate drain valve

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

# INDIRECT GAS COOKER LT.50 WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR1356059

MODELLO  
D73/10PGI05S

SERIE  
DIAMANTE70

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1356059
DEFINITION	D73/10 PGI05 S PEN.GAS IND.M60 W/VAL 50L
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	88,000 Kg
VOLUME (net)	0,381
PACKAGE LENGTH	640,000 mm
PACKAGE WIDTH	870,000 mm
PACKAGING HEIGHT	1100,000 mm
PACKAGE VOLUME	0,700 m3
GROSS PACKING WEIGHT	99,000 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0,275 kW
GAS POWER	10,50
GAS POWER (G25.3/25mbar)	10,00
IP GRADE	IPX4
CERTIFIED MODEL	D73/10 PGI05

# INDIRECT GAS COOKER LT.50 WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project: .....  
Rev: .....  
Zone: .....  
Location: .....


CODICE  
CR1356059

MODELLO  
D73/10PGI05S


SERIE  
DIAMANTE70

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

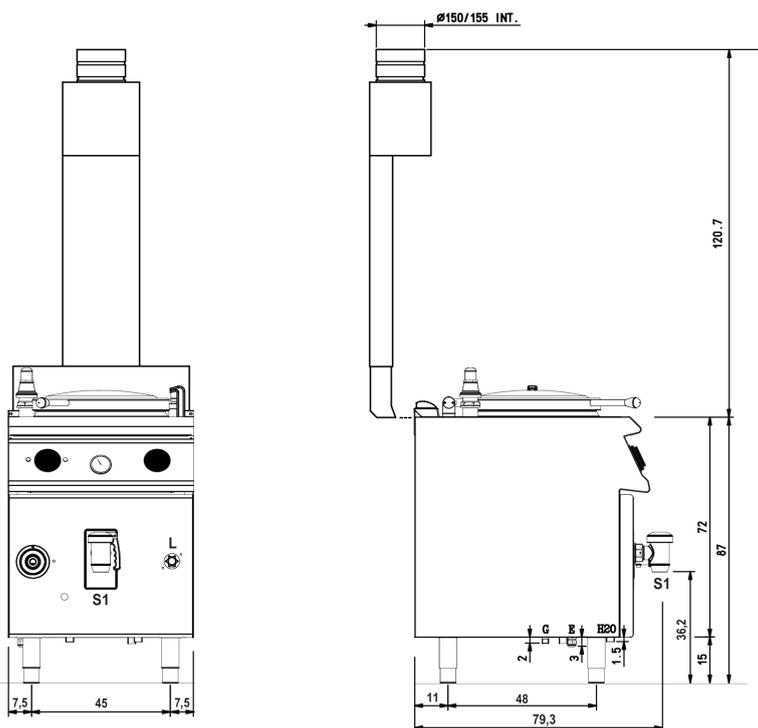

(D) 73/10 PGI05

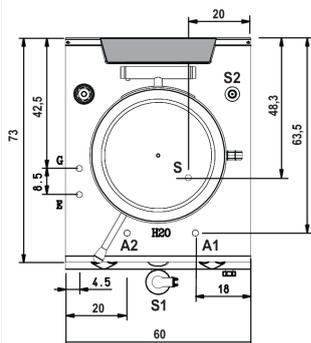

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacchi arrivo acqua - Wasseranschluss - Water inlet  
Arrivée eau - Union de agua - Wateraansluiting
- A1** = Calda - Heiss - Warm - Chaude - Caliente - Warm
- A2** = Fredda - Kalt - Cold - Froid - Fria - Koude
- EN ISO 228-1 G 3/4**
- E** Pressacavo entrata linea elettrica  
Stopfbuchse - Electric cable stress relief  
Presse étoupe de câble él. - Pisacable  
Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection -  
Arrivée gaz - Union de gas - Gasaansluiting
- EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)**
- S** Scarico acqua intercapedine - Wasserablauf Zwischenraum  
Jacket water drain - Evacuation eau double enveloppe  
Descarga de agua intersticios - Afvoer water tussenruimte
- EN ISO 10226-1 R 3/4**
- S1** Scarico acqua - Wasserablauf - Water outlet  
Vidange de l'eau - Desaguadero  
Wateraftapaansluiting  
1 1/2"

# INDIRECT GAS COOKER LT.50 WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR1356059

MODELLO  
D73/10PGI05S

SERIE  
DIAMANTE70

## Product's PLUS

Equipment certified for low voltage  
directive 2014/35/EU according to the  
international CB scheme.



Thanks to the jet-proofing certification  
(IPX5) obtained through specific tests,  
knobs and under-knobs can be washed,  
without compromising functionality  
and safety.



Possibility of hot or cold water loading



Stainless steel tank with aisi 316  
bottom



Indirect pans with automatic  
condensate drain valve



# INDIRECT GAS COOKER LT.50 WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356059

MODELLO  
D73/10PGI05S

SERIE  
DIAMANTE70

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	9C5	
MA97348000	9CV5	
CR0599730	7C8	
CR0599740	7CV8	
MA97349000	9-I5	
CR0592789	ZF6	
CR0592830	ZG	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0599649	7ZL	