

60" Combination Gas Ranges

Standard Features

- Stainless steel exterior including front, back sides, kick plate, back guard and over shelf
- 60" combination ranges standard with either a 24", 36" or 48" griddle top with 2, 4 or 6 burners
- Heavy duty 3/4" thick polished steel griddle plate
- Drip tray provided under burners to catch grease drippings
- 25,000 BTU top burners, 27,000 BTU griddle & 27,000 BTU oven burners
- Oven temperature range between 175°F to 550°F
- Standing pilot for open top burners
- Oven pilot with 100% safety shut off
- Enamel interior oven for easy cleaning
- Multiple position oven rack guides
- One (1) chrome oven rack per oven standard
- Available in Natural and Propane
- 3/4" NPT rear gas connection and regulator provided

MODELS:

ATO-2B48G/ATO-4B36G/ATO-6B24G

ATO-2B48G



ATO-4B36G



ATO-6B24G



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)




Conforms to ANSI
STD Z83.1 1b-2009 (2011)
Certified to CSA
STD 1.8B-2009 (2011)
Conforms to NSF/ANSI STD.4



SPECIFICATIONS

Model	Gas type	Burner name	BTU's	Number of burners	Oven size (inch)	Hot plates working area (inch)	Griddle working area (inch)	Valve types	Net weight (lbs)	Gross weight (lbs)
ATO-2B48G	NG	Hot plates	50,000	2	26 ^{1/2} ×26×14	2pcs 11 ^{4/5} ×11 ^{4/5}	48×20 ^{5/8}	Pilot light	805	970.5
		Griddle	102,000	4						
		Oven	54,000	2						
	LP	Hot plates	46,000	2						
		Griddle	102,000	4						
		Oven	54,000	2						
ATO-4B36G	NG	Hot plates	100,000	4	26 ^{1/2} ×26×14	4pcs 11 ^{4/5} ×11 ^{4/5}	36×20 ^{5/8}	Pilot light	792	948.9
		Griddle	75,000	3						
		Oven	54,000	2						
	LP	Hot plates	92,000	4						
		Griddle	75,000	3						
		Oven	54,000	2						
ATO-6B24G	NG	Hot plates	150,000	6	26 ^{1/2} ×26×14	6pcs 11 ^{4/5} ×11 ^{4/5}	24×20 ^{5/8}	Pilot light	775	940.5
		Griddle	48,000	2						
		Oven	54,000	2						
	LP	Hot plates	138,000	6						
		Griddle	48,000	2						
		Oven	54,000	2						

PLAN VIEW

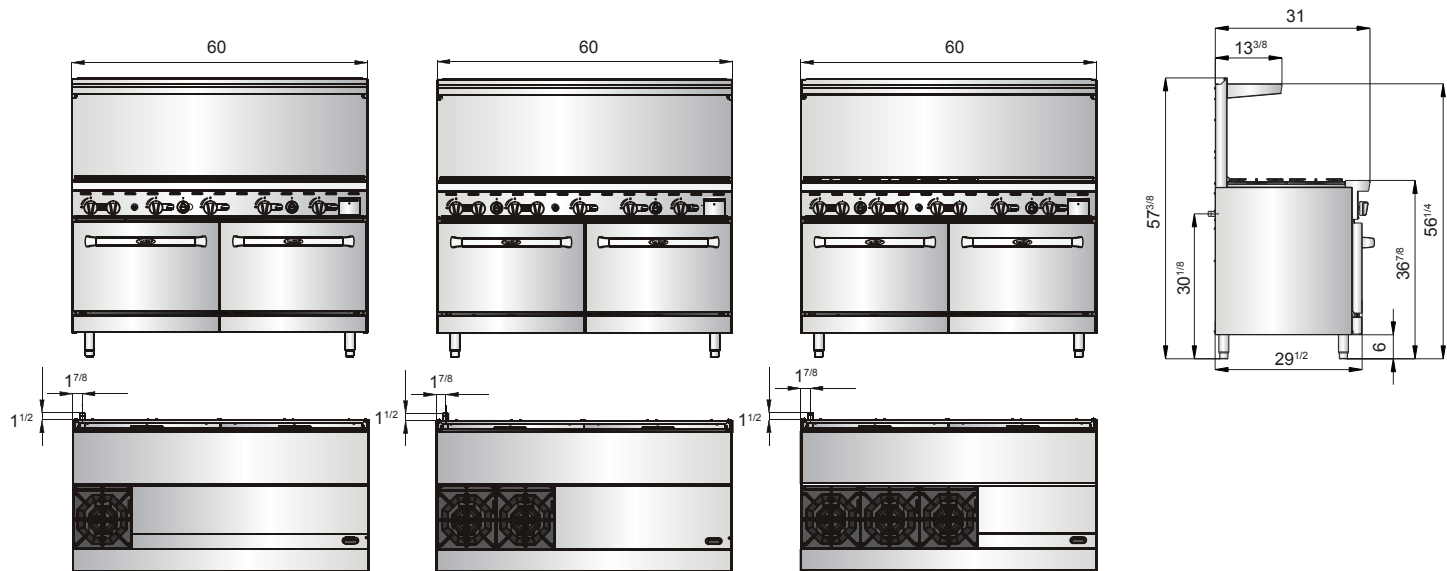

ATO-2B48G

ATO-4B36G

ATO-6B24G

