

# Delta<sup>®</sup> 1200

Chemical Sanitizing Rotary Glasswasher

## Standard Features

- ▶ Automatic conveyor system with composite carousel to prevent damage to glasses, mugs and stemware
- ▶ 12" clearance allows cleaning of taller glassware
- ▶ Clockwise rotation
- ▶ Single switch, auto-fill operation
- ▶ Simplified front access to all controls and chemical settings
- ▶ Solid-state and electromechanical controls
- ▶ Wash and rinse temperature gauges
- ▶ Adjustable rinse control allows hot or cold water final rinse for flexible sanitizing methods
- ▶ Removable upper and lower wash/rinse arms with removable end caps for easy cleaning
- ▶ Low-water protection for pump and wash tank heating element
- ▶ Fits compactly underbar
- ▶ Convenient chemical storage inside the machine
- ▶ Gravity drain
- ▶ Built-in chemical pumps and priming switches
- ▶ Efficient 1/10 HP wash pump
- ▶ Conveniently located conveyor drive motor
- ▶ Quick-removal side panel allows tool-free access to vacuum breakers for ease of service
- ▶ Double-wall cabinet for quiet operation and heat retention
- ▶ Adjustable bullet feet
- ▶ Durable stainless steel construction



Delta<sup>®</sup> 1200

## Specification Statement

Specified unit will be a Jackson Delta 1200 chemical sanitizing rotary glasswasher with clockwise rotation, and a composite carousel conveyor that prevents damage to glassware. Unit will be NSF rated, and will include detergent, rinse aid and sanitizer pumps with priming switches. Unit to be rated for 1,200 glasses per hour. Features include wash tank heating element, 1/10 HP wash pump motor, low-water protection for wash pump and wash tank heating element, choice of hot- or cold-water final rinses, gravity drain, chemical storage inside unit, and double-wall cabinet. 208/60/1 or 230/60/1. Constructed of durable stainless steel with adjustable bullet feet.

**1-year parts and labor warranty.**

## Options & Accessories

- ▶ Scrap Tray
- ▶ Water Hammer Arrestor
- ▶ Scale Prevention System (SPS)
- ▶ Replacement Cartridge for SPS



Get sparkling results  
fast on our high  
speed carousel!


- Composite carousel rack prevents chipping and damage to glassware
- Glass-activated shut off mechanism for hands-free operation
- Easy-to-clean upper and lower wash and rinse arms with removable end caps
- 12" clearance accommodates taller stemware, glasses, and mugs
- Internal rinse water tempering valve for compatibility with chlorine or iodine sanitizers
- Gravity drain
- Built-in chemical pumps and priming switches
- Convenient onboard chemical storage for three one-gallon containers
- Double-wall cabinet for quiet operation and reduced heat loss
- Available voltages
  - 115/60/1 (Delta 115)
  - 208/60/1 or 230/60/1 (Delta 1200)



**LEGEND**

- A - Electrical Connection
- B - Water Inlet, Hot, 1/2"
- C - Water Inlet, Cold, 1/2"
- D - Drain Connection, 2"

All dimensions from the floor can be increased 1 1/4" using the machine's adjustable feet.

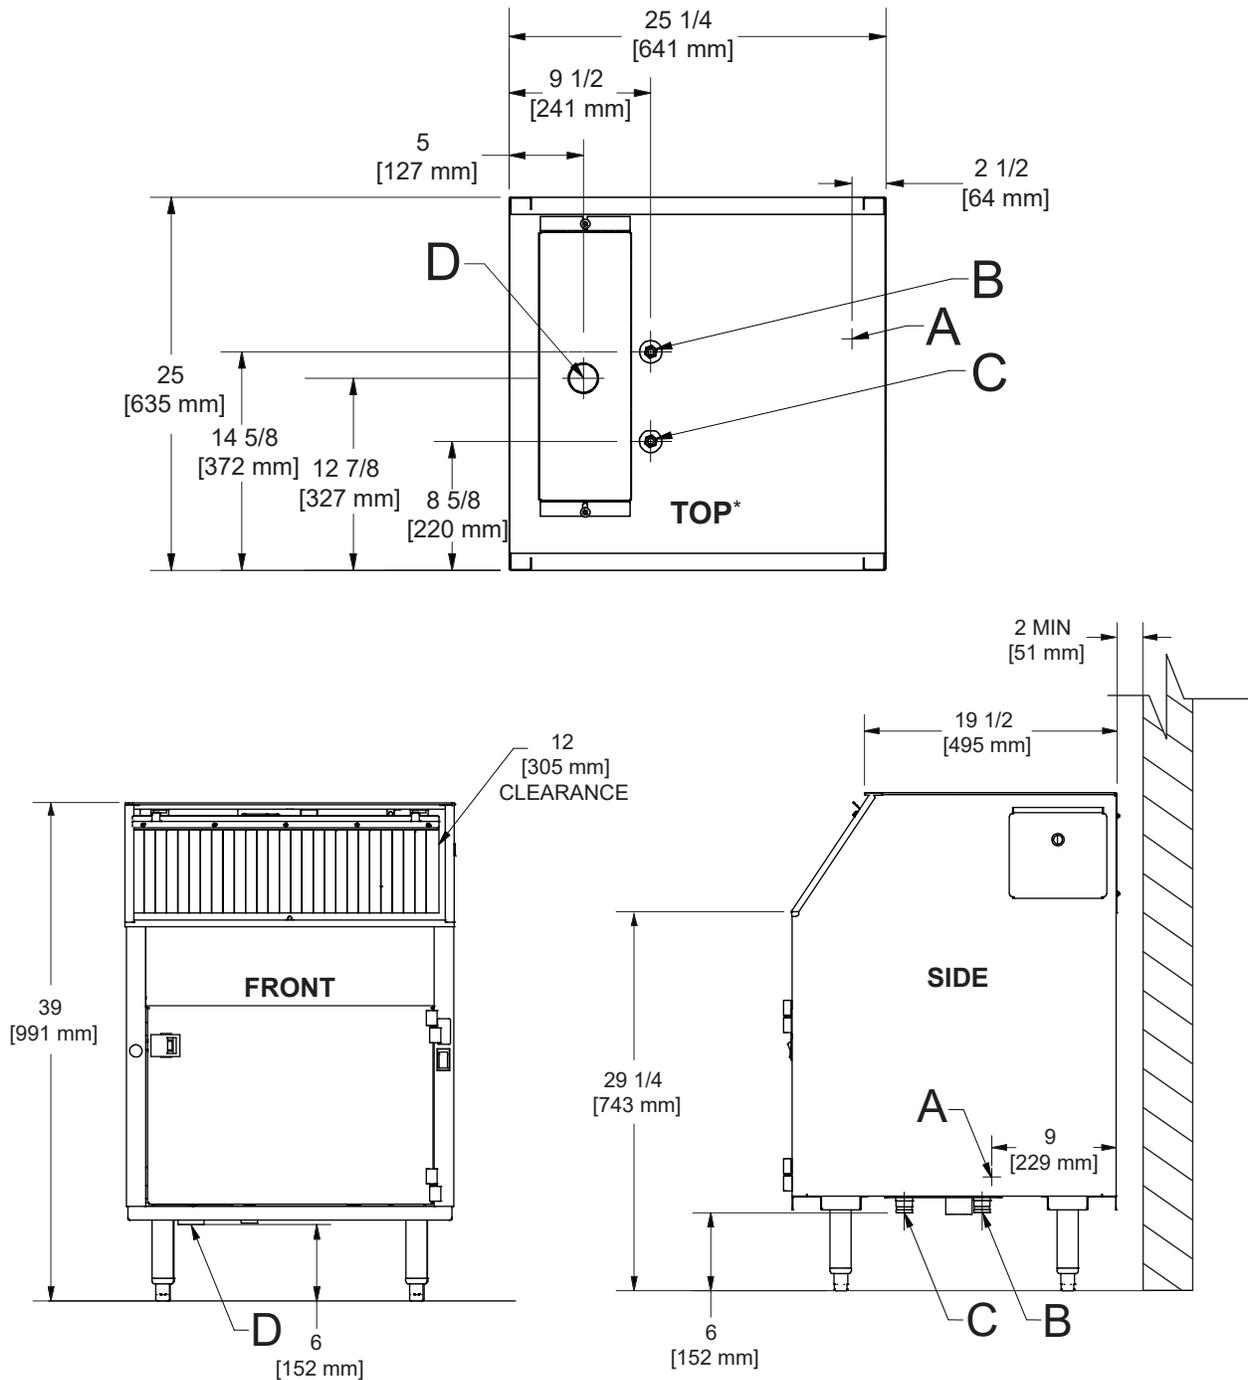



**Warewashing Systems**

### Operating Capacity

Glasses per Hour 1,200

### Operating Temperature

Wash Temperature (minimum) 130 °F/55 °C

Rinse Temperature (minimum) 75 °F/24 °C

### Operating Cycle (seconds)

Total Cycle 120

### Water Consumption

Gallons per Minute (hot) 0.39 (1.5 L)

Gallons per Minute (cold) 1.93 (7.3 L)

Gallons per Minute (combined) 2.32 (8.8 L)

Wash Tank Capacity (gallons) 3.0 (11.4 L)

### Water Requirements

Incoming Water Temperature 130 °F/55 °C

Flow Pressure (PSI) 20 ± 5

Incoming Water Connection (NPT) 1/2"

Drain Connection (NPT) 2"

### Electrical Specifications

Wash Pump Motor (HP)  
208v 1/10

230v 1/10

Wash Tank Heater (kW)  
208v 2.7

230v 3.3

### Chemical Specifications

Sodium Hypochlorite (PPM) 50

Iodophor (PPM) 12.5

Power Supply	Total Load	Minimum Circuit Ampacity	Maximum Overcurrent Protection
208/60/1	13.4 A	13.5 A	15.0 A
230/60/1	14.7 A	14.8 A	15.0 A

### Dimensions

Width 25 1/4" (641 mm)

Depth 25" (635 mm)

Height 39" (991 mm)

Inside Clearance Height 12" (305 mm)

Wall Clearance 2" (51 mm)

Drain Height 6" (152 mm)

### Shipping Details

Shipping Weight 210 lbs (95 kg)

Shipping Width 28" (711 mm)

Shipping Depth 28 1/2" (724 mm)

Shipping Height 51 3/4" (1314 mm)

Shipping Cube 23.90 cu ft

Shipping Class 100

## Contact Jackson

07610-002-66-57 [09/21/21]

### Address

6209 N U.S. Highway 25E  
Gray, Kentucky 40734

### Telephone & Fax

T 888.800.5672  
F 606.523.1799

### Email

customer.service@jacksonwws.com



JACKSONWWS.COM



JACKSON WAREWASHING SYSTEMS



JACKSON WWS

We reserve the right to change specifications in this document without incurring any obligation for equipment previously or subsequently sold.