

Technical data sheet for

E31D4 OVEN / VH31 VENTLESS HOOD ON THE SK2731U STAND

Half Size Digital / Electric Convection Oven with
Halton Ventless Condensing Hood on a Stainless Steel Stand



E31D4

Unit shall be a Moffat electrically heated Turbofan Convection Oven E.T.L. listed and NSF-4 listed. The oven shall have a one piece porcelain enameled oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Oven shall have capacity for four half size sheet pans and include a top broiling oven element and broil operating mode. The oven shall be controlled by an electronic control having separate digital displays and adjusting knobs for time and temperature functions. The oven control shall allow both manual and programmed operating modes and have separate control keys for selection of Broil mode, oven light function and timer operation. The unit shall include a halogen oven lamp. Oven shall be able to be bench mounted on 3" / 76mm feet or mounted on oven stand model SK2731U. Oven shall be fitted with a NEMA 6-15P cordset. Unit shall be supplied in 100% recyclable shipping packaging.

SK2731U

Unit shall be a Moffat Turbofan stainless steel oven stand NSF-4 listed. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with and support Turbofan Convection Oven models E27, E28 and E31. Unit shall be supplied in 100% recyclable shipping packaging.

STANDARD FEATURES

- 4 half size sheet pan or hotel pan capacity
- 3½"/ 80mm tray spacing
- Compact 24¼" / 616mm depth x 31⅞" / 810mm width
- Digital display Time and Temperature Controls
- USB port for programs
- Programmable for up to 30 programs
- Broil mode
- Single direction low-velocity fan
- 2.8kW heating in bake mode / 2.0kW grill-broil elements
- Safe-Touch vented side hinged door
- Stay-Cool door handle
- Porcelain enameled oven chamber

STANDARD FEATURES – VENTLESS CONDENSATION HOOD

- Removes need for installation under canopy or ducted oven hood
- Complies with EPA202 test method for less than <5mg/m³ grease laden effluent limits
- 3 stage filtering including charcoal odour filter
- Condensing heat exchanger for oven vent condensing and reduced heat emissions
- Self contained condensate collection – no connection to waste drain required
- Oven Hood interlock control
- Automatic 2 speed extraction fans - reduced noise/energy

VHIK31 INSTALLATION KIT

- Supplied standard with Hood
- Requires mechanical and electrical field assembly for connection of Hood to Oven

ACCESSORIES

- Turbofan SK2731U Oven Stand
- #H11715 Replacement Charcoal Filter for VH31

VH31

Unit shall be a Halton Ventless Condensing Hood, UL listed and UL EPH classified. The unit shall have all stainless steel construction, include 3 stage filtration and incorporate a condensing heat exchanger. Unit will feature an automatic 2 speed extraction fan with interlocked oven operation, Unit shall be 110-120V and fitted with a NEMA 5-15P cordset. Unit shall be provided with VHIK31 Installation Kit for connection and fitment to Moffat Turbofan Convection Oven model E31D4.

VHIK31 Installation Kit

Installation Kit shall be provided with VH31 Ventless Condensing Hood. Installation kit shall include: Wire harness for oven interlock connection to oven controls. Four 4" (100mm) oven feet and condensate collection pan and housing for self-contained condensate collection. Oven rear shroud for protection of interlock control harness and condensate drain tube. Oven to stand rear securing plate when oven is fitted on a Moffat Turbofan SK2731U Stand.

Halton VH Series Ventless Condensing Hoods are manufactured by Halton Company, USA, exclusively for Moffat Turbofan Convection Ovens.

E31D4 Half Size Digital / Electric Convection Oven

CONTROLS

Electronic controls with Digital Time and Temperature display, Manual or Program modes
 Broil/Grill mode quick select key
 Thermostat range 150-500°F / 50-260°C
 Timer range from 180 minutes in countdown mode
 Timer range up to 999 minutes in time count mode for holding, slow cooking
 Over-temperature safety cut-out

SPECIFICATIONS

Electrical Requirements

208V, 60Hz, 1-phase, 2.9kW, 13.9A
 220-240V, 60Hz, 1-phase, 3.1W, 12.9A
 NEMA 6-15P cordset fitted



External Dimensions (E31D4)

Width 31⁷/₈" / 810mm
 Height 24⁵/₈" / 625mm including 3" / 76mm feet
 Depth 24¹/₄" / 616mm

Oven Internal Dimensions

Width 22¹/₄" / 565mm
 Height 16³/₄" / 425mm
 Depth 15¹/₂" / 395mm
 Volume 3.2ft³ / 0.09m³

Oven Rack Dimensions

Width 21¹/₄" / 540mm
 Depth 14¹/₂" / 370mm

Nett Weight (E31D4)

119lbs / 53.8kg

Packing Data (E31D4)

150lbs / 68.2kg
 15.9 ft³ / 0.45m³
 Width 29¹/₈" / 740mm
 Height 28³/₈" / 720mm
 Depth 32⁷/₈" / 835mm

Drain Requirements – Optional

Hood water condensate can be taken to a water waste drain if desired. A 6ft / 1800mm long 3/8"OD drain hose is supplied with hood.

External Dimensions (VH31 Ventless Hood)

Width: 32¹/₄" / 818mm
 Height: 14³/₈" / 364mm
 Depth: 33¹/₂" / 852mm
 Allow 3" / 76mm rear clearance

Nett Weight (VH31 Ventless Hood)

101 lbs / 46.0 kg

Packing Data (VH31 Ventless Hood)

150lbs / 68 kg
 16.3ft³ / 0.46 m³
 Width: 34¹/₂" / 875mm
 Height: 21¹/₂" / 545mm
 Depth: 38" / 965mm

SK2731U Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E27, E28 and E31 Series model ovens
 6 position tray runners standard
 3" / 76mm diameter wheel swivel castors standard with 2 front castors with dual swivel and wheel
 Supplied CKD for assembly on site

External Dimensions (SK2731U Oven Stand)

Width 31⁷/₈" / 810mm
 Height 34⁵/₈" / 880mm
 Depth 25⁵/₈" / 650mm

Nett Weight (SK2731U Oven Stand)

43lbs / 19.5kg

Packing Data (SK2731U Oven Stand)

49lbs / 22kg
 3.9ft³ / 0.11m³
 Width 32⁵/₈" / 830mm
 Height 31³/₄" / 805mm
 Depth 6¹/₄" / 160mm

VH31 Ventless Condensing Hood

Including VHIK31 Installation Kit

CONTROLS

Illuminated Power switch
 Oven interlocked control

SPECIFICATIONS

Electrical Requirements
 110-120V, 60hz, 1-phase, 1.0A
 NEMA 5-15P 6ft cordset fitted



Water Requirements


No water connection required

INSTALLATION CLEARANCES

Rear 1" / 25mm
 LH Side 1" / 25mm
 RH Side 1" / 25mm

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 12" / 300mm from the appliance sides is required

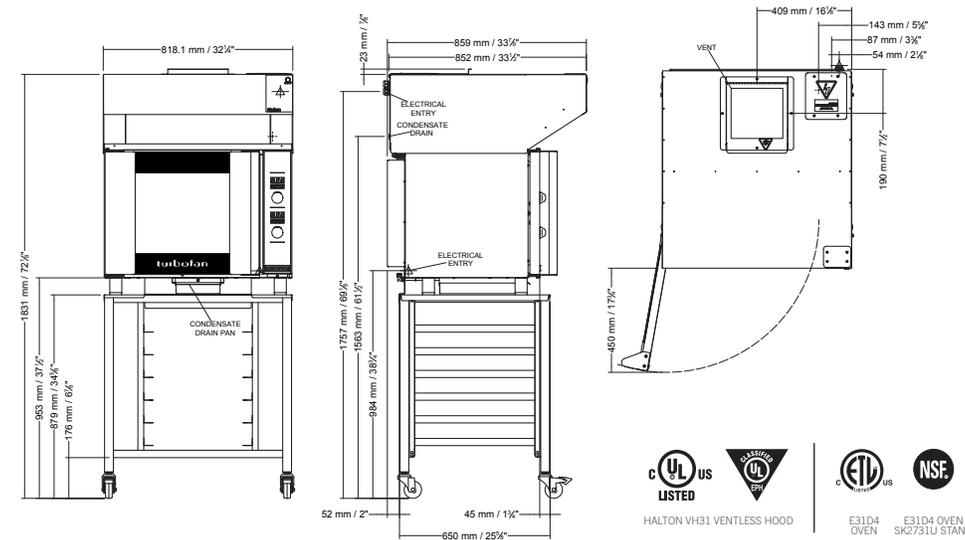

www.moffatusa.com
 www.turbofanoven.com

U.S.A.

Moffat Inc
 3760 Industrial Drive
 Winston-Salem
 NC 27105-2637
 Ph Toll Free 1-800-551 8795
 Ph 336-661 0257
 Fax 336-661 9546
 Email sales@moffat.com
 www.moffatusa.com

Manufactured by:
 Moffat Limited
 45 Illinois Drive, Izone Business Hub
 Rolleston 7675, New Zealand



Designed and manufactured by



ISO9001
 All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
 US.TF.N.S.2101

an Ali Group Company



The Spirit of Excellence