

# INDIRECT GAS COOKER LT.80 WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356069

MODELLO  
D74/10PGI08S

SERIE  
DIAMANTE70



## GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

## TECHNICAL SPECIFICATIONS

Possibility of hot or cold water loading  
Stainless steel tank with aisi 316 bottom  
Indirect pans with automatic condensate drain valve

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

# INDIRECT GAS COOKER LT.80 WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR1356069

MODELLO  
D74/10PGI08S

SERIE  
DIAMANTE70

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1356069
DEFINITION	D74/10 PGI08 S PEN.GAS IND.M80 W/VAL 80L
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	99,800 Kg
VOLUME (net)	0,508
PACKAGE LENGTH	850,000 mm
PACKAGE WIDTH	850,000 mm
PACKAGING HEIGHT	1150,000 mm
PACKAGE VOLUME	0,831 m3
GROSS PACKING WEIGHT	110,000 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0,275 kW
GAS POWER	17,00
GAS POWER (G25.3/25mbar)	16,50
IP GRADE	IPX4
CERTIFIED MODEL	D74/10 PGI08

# INDIRECT GAS COOKER LT.80 WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project: .....  
Rev: .....  
Zone: .....  
Location: .....


CODICE  
CR1356069

MODELLO  
D74/10PGI08S

SERIE  
DIAMANTE70

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

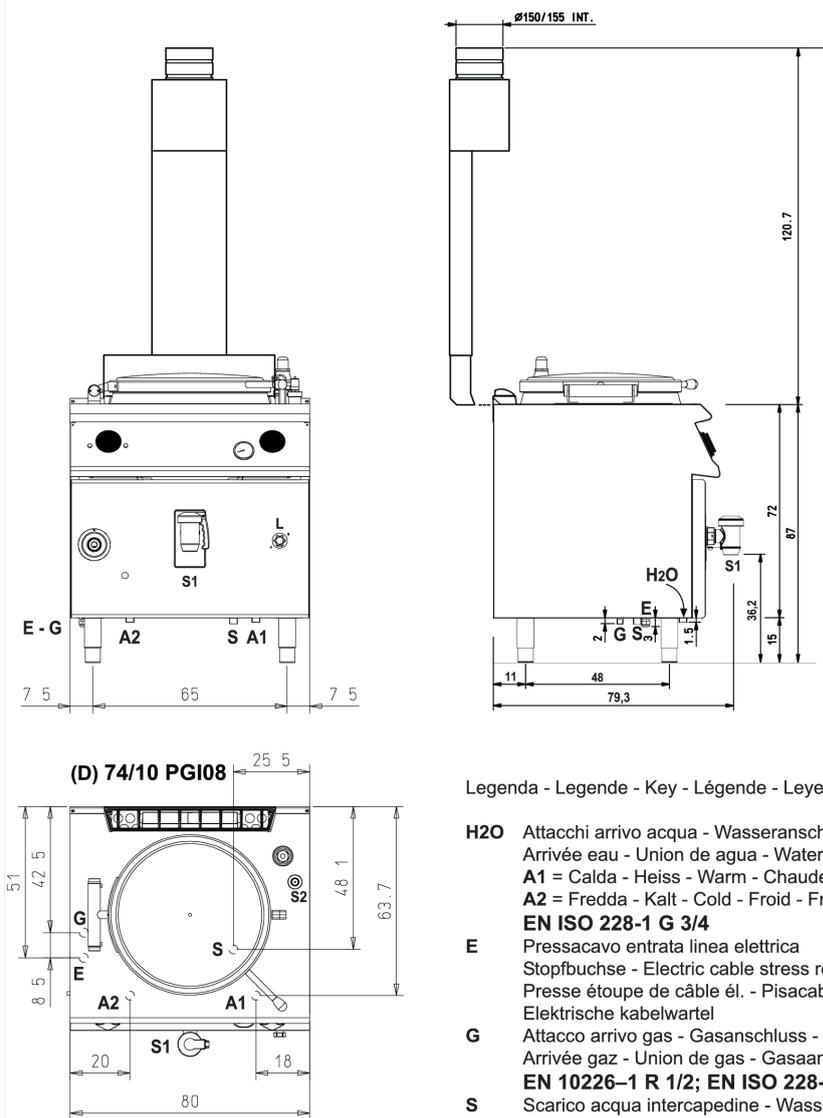

### Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacchi arrivo acqua - Wasseranschluss -Water inlet  
Arrivée eau - Union de agua - Wateraansluiting
- A1** = Calda - Heiss - Warm - Chaude - Caliente - Warm
- A2** = Fredda - Kalt - Cold - Froid - Fria - Koude  
**EN ISO 228-1 G 3/4**
- E** Pressacavo entrata linea elettrica  
Stopfbuchse - Electric cable stress relief  
Presse étoupe de câble él. - Pisacable  
Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection -  
Arrivée gaz - Union de gas - Gasaansluiting  
**EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)**
- S** Scarico acqua intercapedine - Wasserablauf Zwischenraum  
Jacket water drain - Evacuation eau double enveloppe  
Descarga de agua intersticios - Afvoer water tussenruimte  
**EN ISO 10226-1 R 3/4**
- S1** Scarico acqua - Wasserablauf - Water outlet  
Vidange de l'eau - Desaguadero  
Wateraftapaansluiting  
**1 1/2"**

# INDIRECT GAS COOKER LT.80 WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR1356069

MODELLO  
D74/10PGI08S

SERIE  
DIAMANTE70

## Product's PLUS

Equipment certified for low voltage  
directive 2014/35/EU according to the  
international CB scheme.



Thanks to the jet-proofing certification  
(IPX5) obtained through specific tests,  
knobs and under-knobs can be washed,  
without compromising functionality  
and safety.



Possibility of hot or cold water loading



Stainless steel tank with aisi 316  
bottom



Indirect pans with automatic  
condensate drain valve



# INDIRECT GAS COOKER LT.80 WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356069

MODELLO  
D74/10PGI08S

SERIE  
DIAMANTE70

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	9C5	
MA97348000	9CV5	
CR0599730	7C8	
CR0599740	7CV8	
MA97349000	9-I5	
CR0592799	ZF8	
CR0592830	ZG	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CMF0708	CMF0708	
CR0599649	7ZL	