Project:_____

Location:_____

Item #:_____ Quantity:_____

Model #:_____

MODEL: IRR-AGB23_2

REACH-IN:
Top Mounted Reach-in Refrigerators



GENERAL FEATURES

- ***Higher energy efficiency.*** *R290 refrigerant with electric fans, LED lighting and evaporative tray without electric resistances.*
- ***Sanitation.*** Our units feature a hygienic design with rounded corners that have a large radius, making them easy to clean. Additionally, the shelves and runners inside the display can be quickly removed for thorough interior cleaning. Each unit is equipped with a trap at the bottom to facilitate cleaning.
- ***Doors.*** Self-closing door system features a permanent pressure mechanism, ensuring a secure closure every time. Additionally, a convenient 'stay open' feature engages when the door remains open at 95 degrees or beyond. Our doors also include triple chamber door gaskets that are easy to remove and snap in, ensuring an effective seal. Plus, for added flexibility, our doors are field reversible, allowing for easy installation and use in a variety of settings.
- ***Control System.*** Our temperature management system offers unparalleled precision, allowing for highly accurate temperature settings. With greater flexibility in adjusting temperature ranges, our system can be tailored to meet the unique needs of each end user. This ensures optimal performance and maximum satisfaction with every use.
- ***Lighting.*** LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% to 90% compared to a traditional bulb, better light quality.
- ***100% Tested.*** All condenser units are 100% tested, in helium chambers for refrigerant leak detections***.***
- ***Certified.*** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate Division
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599
www.infrico.us
sales@infrico.com

Project:_____

Location:_____

Item #:_____ Quantity:_____

Model #:_____

MODEL: IRR-AGB23_2

REACH-IN:
Top Mounted Reach-in Refrigerators

STANDARD FEATURES

➢ **Exterior**

- AISI 430 Stainless Steel.

➢ **Interior**

- AISI 430 Stainless Steel.
- Sealed interior floors and rounded cabinet corners.
- LED lighting.
- Internal drain trap for easy cleaning.

➢ **Door**

- Polyurethane insulated door.
- Exterior: AISI 430 Stainless Steel.
- Interior: AISI 430 Stainless Steel.
- Self – closing door with stay open feature.
- Stainless Steel heavy-duty hinges.
- Triple chamber snap in door gaskets for easy removal and cleaning.
- Field reversible door (hardware needed).
- Heated door frame to avoid ice accumulation. (Freezers only)
- Door locks.
- Full-height door opening: 23” x 53” (584x1346 mm).

➢ **Insulation**

- CFC- Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation.
- Low GWP & Zero ODP effect.

➢ **Casters**

- 4" Diameter casters already installed.
- Locks provided on front set.

OPTIONAL FEATURES

✓ Stainless Steel wire shelf.

✓ Additional slide kits.

✓ Set of 6” legs, height adjustable from 5” to 8”.

✓ Electrical connection is 230 V / 1 ph / 50 Hz (Plug type and consumption varies).

INFRICO-North America Corporate División
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599
www.infrico.us
sales@infrico.com

Project:_____

Location:_____

Item #:_____ Quantity:_____

Model #:_____

MODEL: IRR-AGB23_2

REACH-IN:
Top Mounted Reach-in Refrigerators

- **Shelving**
  - (3) Three plastic coated wire shelves single door with stainless steel tray slides included.
  - Dimensions WxD: 20-7/8" x 25-5/8" (530 x 650 mm).
  - Tray slides are compatible with 18" x 26" (457 x 660 mm) and 12" x 20" (305x660 mm) sheet pans.
- **Refrigeration**
  - Digital temperature controller with automatic defrost system.
  - Hinged control panel, easily removable.
  - **Compact refrigeration system Monoblock, INFRIBLOCK®.**
  - Energy-saving non-electric condensate pan.
  - Evaporator coil coated with anti-corrosion material 100% Polyester.
  - Expansion valve.
  - **Refrigeration capacity:**

    IRR-AGB302 - 1511Btu/h(14ºF) / 443W(-10ºC).

- **Electrical**
  - Cord and NEMA 5-15 plug.



  - Electrical connection is 115V / 1ph / 60 Hz.
- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

Project:_____

Location:_____

Item #:_____ Quantity:_____

Model #:_____


MODEL: IRR-AGB23_2

REACH-IN:
Top Mounted Reach-in Refrigerators

MODELS	Dimensions (inches) (mm)			Doors	Shelves	Ref	Ref. Weight (Lbs.) (gr.)	Temperature Range (ºF) (ºC)	Capacity (Cu.Ft.) (L)	Cond. Unit. H.P.	Case Amps 115V	Crated weight (Lbs.) (kg.)
	W	D	H									
IRR-AGB23_2	27 (687)	31-1/4 (800)	84 (2.113)	2	3	R290	0,32 (110)	-10ºF/0ºF (-23ºC/-17ºC)	21,5 (610)	1/4	3,49	319 (145)


PLAN VIEW

ELEVATION

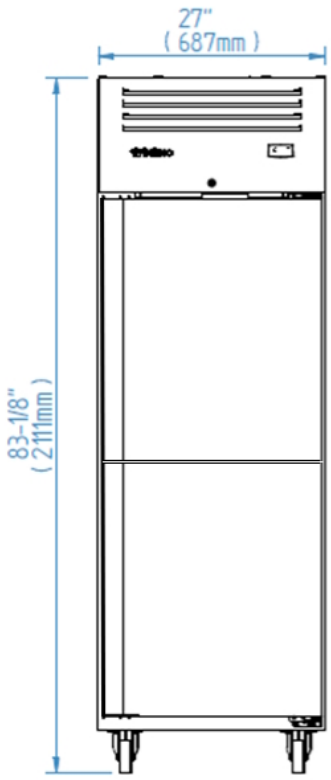


IRR-AGB302

RIGHT VIEW

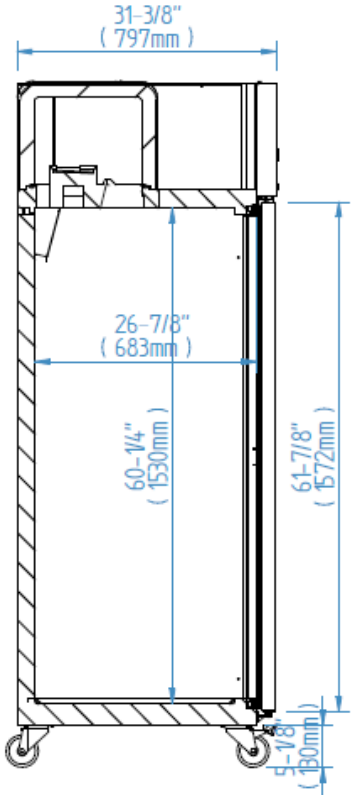

PLANT VIEW

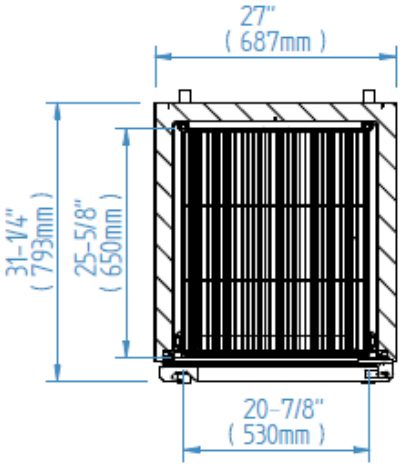

Review:01 Date: 11/10/2023 IRR-AGB23_2

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate División
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599
www.infrico.us
sales@infrico.com