

PROOFER & HEATED HOLDING CABINETS

Non-Insulated – Universal – For Various Size Trays, Pans, and Gastro-Norm

TEMP SET RANGE: 90° – 190°F (32° – 88°C) 

NON-INSULATED PROOFER/HEATER "ETC-UA-PH" SERIES

Two cabinets in one! Dual-purpose cabinets proof and heat, eliminating costly duplication of equipment

- 1** User-friendly mechanical control panel has separate air moisture and air temperature controls, and includes steam deflector shield to protect controls from moisture damage
- 2** Humidity system with separately controlled moisture and heat settings enables the user to create high humidity with low heat output - an ideal environment for proofing
- 3** Removable humidity pan: 12" x 20" pan provides large water reservoir - removable, easy to clean and replaceable
- 4** Stainless steel wire universal angles accommodate a large variety of pan sizes on adjustable 1 1/2" centers
- 5** Field reversible door - flexible installation options for kitchen layout
- 6** Easy to maneuver - FWE cabinets are constructed with durable, maintenance-free casters designed to easily move around your space and lock into place
- 7** Magnetic workflow door handle - ergonomically accommodates kitchen staff and servers at varying heights
- 8** Sloped inside top directs condensation towards the back of the cabinet, preventing drips onto product


****Two year limited warranty***



(Shown with Optional Accessory 3.5" Casters)



Control Panel



Humidity Pan



Adjustable Tray Slides





Magnetic Workflow Door Handle

PROOFER  HEATER

SPECIFICATIONS

PROOFER & HEATED HOLDING CABINETS

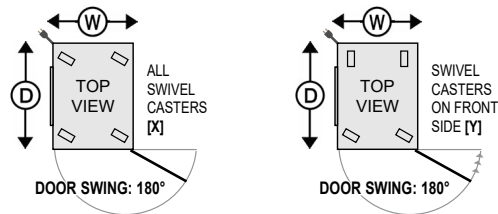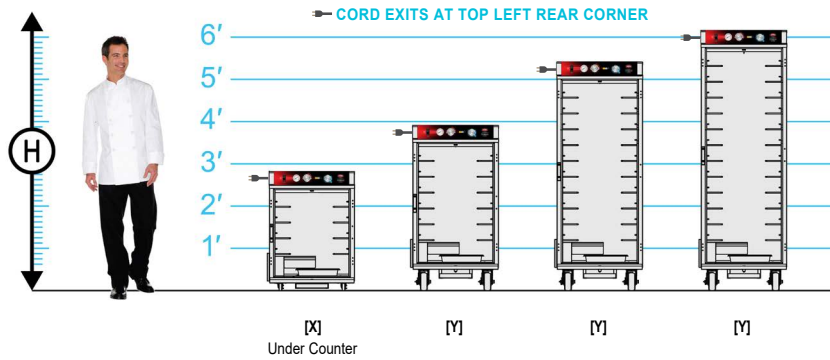

ELECTRICAL DATA			
▼ STANDARD			
VOLTS	120	208	220-240
WATTS	1900	1830	2430
AMPS	15.8	8.8	10.1
HERTZ	50/60	50/60	50/60
PHASE	Single	Single	Single
PLUG USA	5-20P	6-15P	6-15P
PLUG CANADA	5-20P	6-15P	6-15P

▼ Lowest voltage shown is standard.

CAPACITIES OF TRAYS / PANS: 4.5" (114 mm) Spacings are Standard [A]																							CONSULT FACTORY FOR SHIPPING CLASS			
MODEL NUMBER	STANDARD CAPACITY: NUMBER OF TRAYS/PANS @ 4.5" Spacings (114 mm) [A]									OPTIONAL CAPACITY: NUMBER OF TRAYS/PANS @ 3" Spacings (76 mm)									OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)				SHIP WT. LBS. (KG)			
	TRAY/PAN SLIDES PROVIDED	18 x 26	12 x 20	14 x 18	18 x 13	20 x 22	10 x 20	GN 2/1	GN 1/1	MAXI-PAN	TRAY/PAN SLIDES REQUIRED (Additional)	18 x 26	12 x 20	14 x 18	18 x 13	20 x 22	10 x 20	GN 2/1	GN 1/1	MAXI-PAN	HIGH "H"	DEEP "D"		WIDE "W"	NO. OF DOORS	CASTER SIZE
		4	8	8	8	4	8	4	8			4	5	10	10	10	5	10	5		10	5		10		
Under Counter	4 pr	4	8	8	8	4	8	4	8	4	5 pr (1 pr)	5	10	10	10	5	10	5	10	5	34" (864)	33.5" (851)	25.25" (642)	1		
	6 pr	6	12	12	12	6	12	6	12	6	9 pr (3 pr)	9	18	18	18	9	18	9	18	9	47" (1194)	33.5" (851)	25.25" (642)	1	5"	240 (109)
	10 pr	10	20	20	20	10	20	10	20	10	14 pr (4 pr)	14	28	28	28	14	28	14	28	14	65" (1651)	33.5" (851)	25.25" (642)	1	5"	285 (130)
	12 pr	12	24	24	24	12	24	12	24	12	17 pr (5 pr)	17	34	34	34	17	34	17	34	17	74" (1880)	33.5" (851)	25.25" (642)	1	5"	320 (145)

[A] Universal tray slides accommodate: (1) 18" x 26", (2) 12" x 20", (2) 14" x 18", (2) 18" x 13", (1) 20" x 22", (2) 10" x 20" trays/pans. Uprights punched on 1.5" (38 mm) centers. Universal tray slides are adjustable. Number of tray slides are listed above. Standard spacings are 4.5" (114 mm).

ETC-UA-PH models are available with:
See-thru Lexan Door [add "L"]
Dutch Doors [add "D"]

Note: Dutch Doors are 2 half size doors only available on full-size models.

CONSTRUCTION. Heliarc welded, single unit construction; 20 gauge polished stainless steel exterior, 22 gauge stainless steel inside bottom. Inside top shall be sloped to direct condensation to the rear of the unit.

HANDLES. Full-size, form-fitting recessed hand grips shall be mounted on each side of cabinet.

DOORS AND LATCHES. Flush mounted, field reversible, stainless steel insulated doors. High temperature gasket sealed; gasket shall be cabinet mounted. Magnetic work flow door handle shall be full length, vertical, and positive closing. ETC-UA-4PH is standard with horizontal work flow handle. Each door shall have two (2) heavy-duty edgemoat die cast hinges. The hinge and latch mountings are reinforced with stainless steel backing plates.

CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. ETC-UA-4PH model shall be standard with a caster configuration of four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

TRAY SLIDES. Welded rod-style tray slides are stainless steel for greater durability and sanitation. Fully adjustable/removable and designed to give secure bottom tray support. Removable stainless steel uprights shall be

punched on 1.5" (38 mm) spacing, on center, for easy tray adjustment, and shall easily lift off of heavy-duty stainless steel brackets without the use of tools for cleaning.

PROOFING SYSTEM/CONTROLS. Built in humidified holding system shall include two (2) separate long life Incoloy nickel-chromium alloy heating elements per cavity; separate, adjustable controls shall be provided for each function. One to control the interior air temperature, and one to control the interior air moisture. An oversized stainless steel water reservoir shall be removable for ease of cleaning/sanitation. System shall have a Hi-Temp, self-lubricated, impedance protected fan-cooled blower motor for moist air distribution. Controls shall be up-front, recessed and shall include a full range thermostat

adjustable to actual temperature. Thermostat shall include temperature scale marked in ten degree increments (F/C) from 90° to 190°F (32° to 88°C). An operational range thermometer, adjustable moisture control (Low to High) with "P" to indicate "Proof" position, 20 amp ON/OFF power switch, humidity cycle light, and thermostat cycling light shall also be included.

ELECTRICAL CHARACTERISTICS. 3 wire grounded tri-directional power cord and plug, rear mounted for safety. See electrical data chart above for amperage and receptacle configuration. See electrical chart for models that require a dedicated circuit.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

ELECTRICAL

220 volt, 50/60 Hz, single phase
Element upgrade

Electronic controls
Mechanical timer

DOORS

Key locking door latch
Dutch doors

Left hand door hinging
See-thru Lexan doors

Glass doors

SPACINGS

Fixed rack assembly
Extra stainless steel tray slides

Shelves

CASTERS

All swivel casters

Larger casters

EXTRAS

X-factor frame (consult factory)