

Drop-In Drop-in refrigerated well, static with fan (3 GN container capacity)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



341042 (DIIC3)

Drop-in refrigerated well,
static with fan (3 GN
container capacity)

Short Form Specification

Item No. _____

Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations. Designed to serve the food in gastronorm containers with a maximum height of 150mm. Food introduced at the correct temperature maintains its core temperature according to Afnor Standards. Automatic defrosting guarantees evaporators clearance and efficient well cooling. Digital control with temperature display with precise adjustment (0,1°C). Fully compliant HACCP digital controls include visible alarms. A constant flow of cold air circulating through the containers guarantees the correct food temperatures. Temperature uniformity and fast cool down times are guaranteed thanks to powerful radial booster fans. Cylindrical stainless steel air diffusers provides a constant air circulation. 84% faster cool down time (than static refrigerated well) reduces energy consumption by allowing the operator to switch the machines on only when needed. Wells in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion. R290 refrigerant gas (GWP=3) to reduce environmental impact and increase cooling efficiency. The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled. Then cooled air is being distributed with radial booster fans.

Main Features

- Suitable for GN 1/1 containers with a maximum height of 150 mm.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- CB and CE certified by a third party notified body.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.
- Available drop-in dimensions: 2, 3, 4, 5, 6 GN.
- Designed to serve the food in gastronorm containers.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- Remote version is available.
- A constant flow of cold air circulating through the containers guarantees the correct food temperatures. Temperature uniformity and fast cool down times are guaranteed thanks to powerful radial booster fans. Cylindrical stainless steel air diffusers provides a constant air circulation.
- 84% faster cool down time (than static refrigerated well) reduces energy consumption by allowing the operator to switch the machines on only when needed.

Construction

- Well bottom is inclined to facilitate water drainage.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion.
- IPx2 water protection.
- The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled. Then cooled air is being distributed with radial booster fans.

APPROVAL: _____



Electrolux
PROFESSIONAL

Drop-In Drop-in refrigerated well, static with fan (3 GN container capacity)

Electric

Supply voltage:

341042 (D11C3)

220-240 V/1N ph/50 Hz

Electrical power max.:

0.57 kW

Water:

Water drain outlet size:

1"

Key Information:

External dimensions, Width: 1100 mm

External dimensions, Height: 595 mm

External dimensions, Depth: 620 mm

Net weight: 51.3 kg

Shipping weight: 65.7 kg

Shipping height: 715 mm

Shipping width: 1140 mm

Shipping depth: 660 mm

Shipping volume: 0.54 m³

Set temperature: -20 / -10 °C


Noise level: 62 dBA

Refrigeration Data


Refrigerant type:

R290

Side

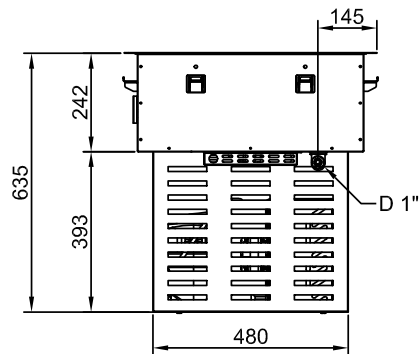

Top

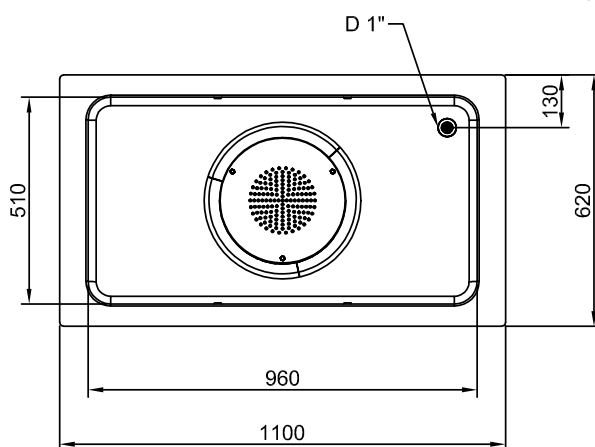

D = Drain
EI = Electrical inlet (power)



Drop-In
Drop-in refrigerated well, static with fan (3 GN container capacity)



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2020.11.12





Electrolux
PROFESSIONAL

Drop-In Drop-in refrigerated well, static with fan (3 GN container capacity)

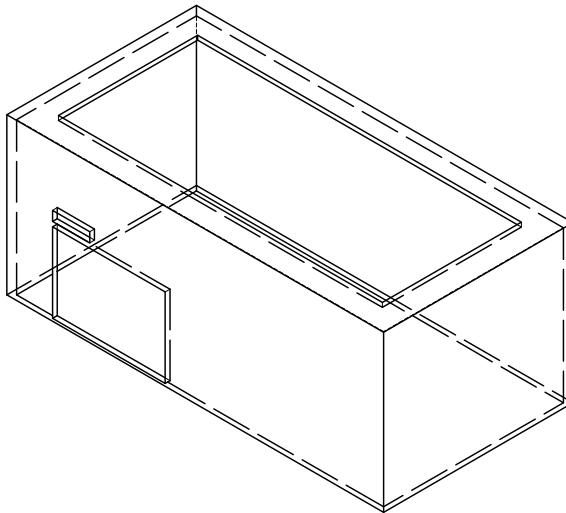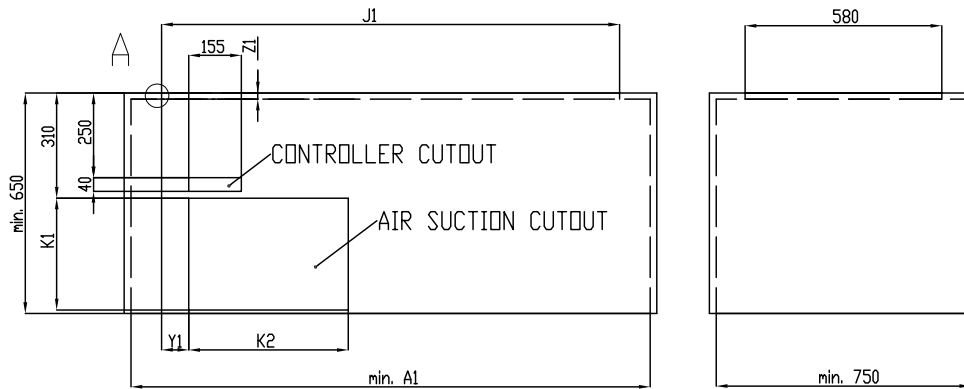

	J1	A1	K1	K2	Y1	Z1
2 GN	700	880	330	470	80	20
3 GN	1030	1200				
4 GN	1350	1530				
5 GN	1670	1850				
6 GN	2000	2180				

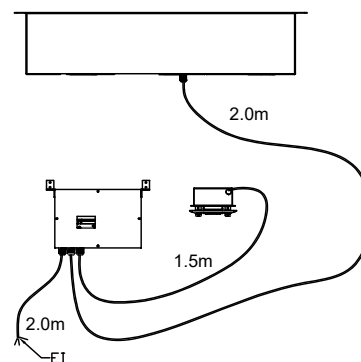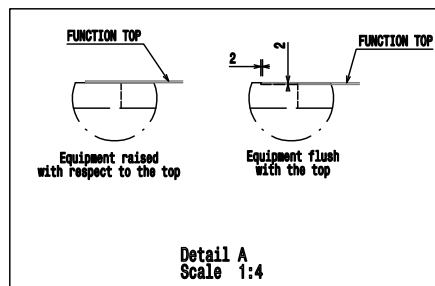

6. IDS COLD STATIC WELL WITH FAN



Drop-In
Drop-in refrigerated well, static with fan (3 GN container capacity)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2020.11.12