

Culino 100E Static Jacketed Kettle

Model – Culino 100E (4215205)

STANDARD FEATURES

- Culino static jacketed kettle
- Electric heated version
- 316 Stainless steel bowl
- Flat panel digital controls
- Food temperature control (option)
- Multifunction timer (option)
- Automatic measured water filling (option)
- Electric tilting
- Measuring stick
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories




TECHNICAL DATA

Net Volume	100L	Electrical	Power 16 kW
Spare Volume	10.5 L		Voltage 400-415V,
Gross Volume	110.5 L		3P+N+E 50/60Hz
Dimensions			AMP 25A
Width	1154mm	Total Heat	16kW
Height	1039mm	Load	Latent 0.8 kW,
Depth	792mm		Sensible 3.4 kW
Connections		Waste	By kitchen
Water	Cold ø15mm		contractor
	Hot ø10mm	Net Weight	232 kg

NOTE - Mandatory installation kit required for all installations, options are:

- Single kettle surface – 4215837
- Single kettle subsurface – 4215838
- Group kettle surface – 4215845
- Group kettle subsurface - 4215846

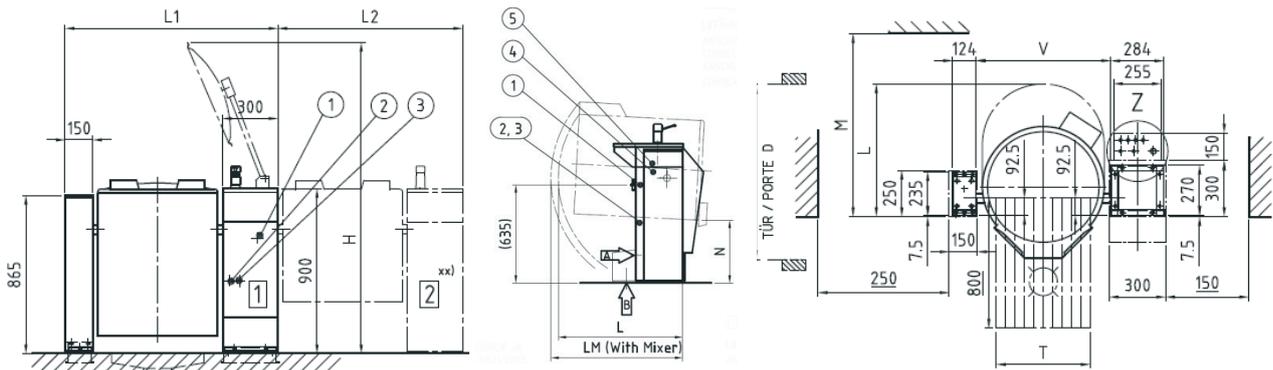

Finland
metos.com/manufacturing

Metos Oy Ab
 Ahjonkaarre
 FI 04220 Kerava
 Finland
 Telephone +358 204 3913
international.sales@metos.com

- (1) Electrical connection
- (2) Cold water connection
- (3) Hot water connection
- (4) Data cable (HACCP option)
- (5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	T mm	D mm	N mm	V mm
100E	1154	1004	1080	710	850	1800	500	785	405	720

Disclaimer: All unit capacities are based on subjective testing.

In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.