

Under-equipment Stands

# TRCB-96-HC

 Under-Equipment Refrigerator, 4 Drawers



Dimensions	
External Width (mm)	2426
External Depth (mm)	816
External Height (mm)	648
Exclusions	Depth does not include 26 mm for rear bumpers.
Net Volume (Litres)	156
Gross Volume (Litres)	589
Per Drawer Capacity (max depth mm)	3x 1/1 GN (100)
Unpackaged Weight (kg)	223
Packaged Weight (kg)	234
Packaged Dimensions (W x D x H mm)	2565 x 914 x 775
Supplied with	Heavy duty lock-in-place ø 102 mm castors (127 mm height)

Build	
Drawer Count	4
Exterior Construction	Stainless steel front and top, aluminium sides and rear
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Right side
Clearance Required	26 mm rear, 26 mm right side. Minimum clearance of 102 mm is required between bottom of cooking equipment heating element and the TRCB top.
Cord Length (Meters)	2.13
Max Weight Supported (kg)	651
Standard w/ Locks	Not Standard (build option)

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	2
Watts	460
Climate Class	5
Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Test Standard	EN 16825
EEC	D
Energy Efficiency Index	67.3
Defrost Type	Auto
Energy Consumption (kWh/24h)	4.033
Energy Consumption (kWh/Annum)	1472



Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia


[0800 783 2049](tel:08007832049)  
[+41 61 563 07 05](tel:+41615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



# TRCB-96-HC

Under-Equipment Refrigerator, 4 Drawers

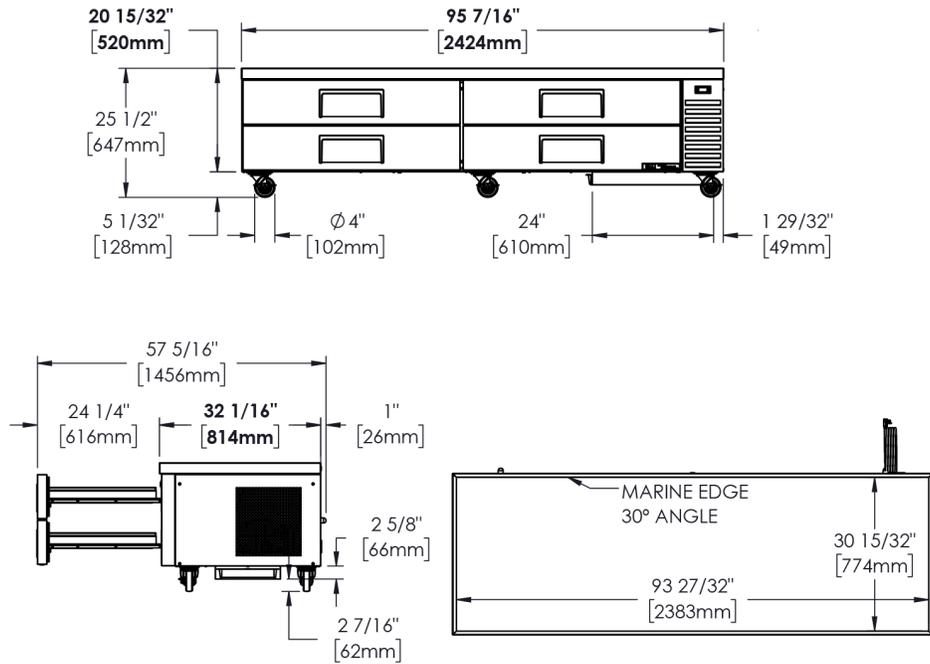

Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
[+41 61 563 07 05](tel:+41615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

