

PROJECT:		
ITEM #		QTY:
MODEL#		
AIA #	. SIS #	

VICTORY ELITE™ TOP MOUNT REFRIGERATOR

VERSA-1D-HD-HC



EXCLUSIVE WARRANTY

- 7 Year Parts, Labor and Compressor
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)

NO INC.

CABINET CONSTRUCTION

- · Stainless Steel Front, Gray Coated Sides
- · Aluminum Interior
- Snap-In, Magnetic Door Gasket(s)
- · Heavy Duty Cam Lift Hinges
- · Stay-Open Door Feature For Easy Product Loading
- 6" Casters
- · 8' Cord And Plug

FEATURES

- High Performance Refrigeration System With An Electronic Control
- · Expansion Valve Technology
- · Energy Efficient LED Lighting
- 3 Heavy Duty Epoxy Coated Shelves

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- · Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- · Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Refrigerator Capable Of Maintaining Product Temperature Between 36°F And 38°F



Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs

OPTIONS & ACCESSORIES

THE USA COLOR TH

- · Stainless Steel Back
- Stainless Steel Breaker
- Stainless Steel Interior
- Stainless Steel Exterior
 6" Legs Or 3" Casters
 (no charge at time of order)

Tray Slides

- · Seismic/Flanged Legs
- Additional Shelves: Heavy Duty Epoxy Coated Chrome Plated Or Stainless Steel
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see not on back page)

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com


Rev. 7/1/24 Printed in U.S.A.


APPROVAL: _____ DATE: ____




VERSA-1D-HD-HC



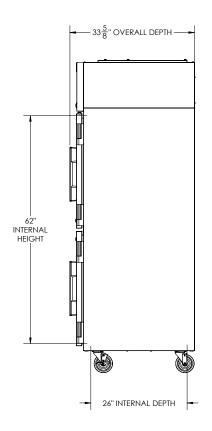

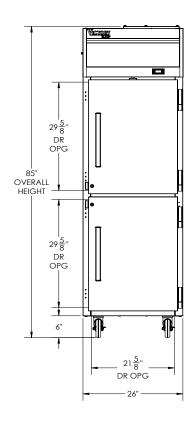



We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top clearance is required

CHARACTERISTICS EL		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	21.17	Cabinet Voltage	115/60/1	Height	88"
Width, Overall (in.)	26"	Total Amperes	2.7	Width	35"
Depth, Overall (with handles)	33 5/8"	NEMA Plug (8' cord)	5-15P	Depth	45"
Height Overall (6" casters)	85"	REFRIGERATION DATA		Crated Weight	346 lbs
Depth, Door Open 90°	55 1/8"	Condensing Unit Size, HP	1/4	*NOTE: Remote units are field wired and comes with 6" legs. Refrigerant must be specified at	
Door Openings (in.)	215/8" x 29 5/8"	Refrigerant*	R290		
No. Of Doors/Shelves	2/3	Capacity (BTU/HR) (100°F/20°F)	1702		
		Heat Rejection (BTU/HR)	2553	time of order.	
		Charge (lbs/grams/ounces)	0.2425 / 110 / 3.88		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Rev. 7/1/24 Printed in U.S.A.

