

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

### P-SERIES REACH-IN WARMING CABINET

PH2 Half-Solid Double Door Warming Cabinet

MODEL: **PH2-1HS** 



## 3 Year Parts/Labor Warranty

#### **CABINET CONSTRUCTION**

- Exterior stainless steel front and side (galvanized top, bottom &
- Interior is made of corrosion resistant aluminum
- Operational indicator panel contains thermometer and adjustable thermostat control which is accurately calibrated from 80°F to 180°F
- Manually controlled humidity vents are provided in the top of the
- Self closing doors with safety stops
- Heavy-duty cylinder lock and self-adjusting magnetic gasket
- Stainless steel breaker
- Cam-lift hinges
- Anti-microbial door handles
- Three (3) silver freeze shelves
- 6" Adjustable legs standard

#### **OPTIONS & ACCESSORIES**

- Pan slides
- 3" or 6" Casters
- 6" Seismic Legs

#### **ELECTRICAL SYSTEM**

- 20 AMP breaker required for double door units
- Strip type 750-watt heating elements, operating on 208-240/60/1, having a total of 1500 watts per compartment.
- Externally mounted blower system maintains even temperature through out the food zone area.


















MODEL	PH2-1HS
EXTERNAL DIMENSIONAL DATA	
Width Overall	52 1/8"
Depth Overall with Handle	34 5/8"
Height Overall with Legs	83 3/4"
Number of Doors	4
Depth with Door Open 90°	57 5/8"
Door Opening (in)	21 1/2" x 24 1/4"
INTERNAL DIMENSIONAL DATA	INTERNAL DIMENSIONAL
NET Capacity (cubic ft.)	44.57
Internal Width Overall (in)	48 1/8"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	56 5/8"
ELECTRICAL DATA	
Cabinet Voltage 208-240	208-240
Max. Fuse Size T.D.	15 AMPS
Feed Wires	2
Heater Watts per section (@240V)	1500
Total Wattage (Heaters & Fan @240V)	3000
Total AMPS	11.3 / 13.0
WEIGHT DATA	
Gross Weight (Crated lbs)	460 lbs
Height - Crated	87"
Width - Crated	60"
Depth - Crated	45"

# **Warming Cabinet** Model: PH2-1HS

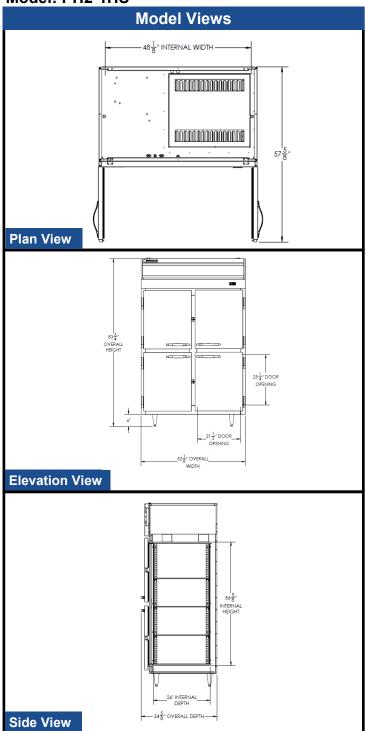

#### **ELECTRICAL CONNECTION**



Units pre-wired at factory and include 8' long cord and plug set.











