

Overview

Chilled display units incorporating a cold well, the unique Moffat innovative “Polar Air Stream” system provides a constant wall of cold air which moves across the well blanketing the food displayed and recirculates back through the system. Holding pre-chilled food at a safe and regulated temperature. Retaining taste and freshness throughout, perfect for fruit and vegetables, salads, and cold drinks. Self-contained units with accurate digital control, automatic defrost, high pressure warning, and automatic condensate evaporation. Utilising a highly efficient, naturally occurring hermetically sealed hydrocarbon refrigeration gas type R290 reducing the carbon footprint and energy consumption.

The chilled well is designed to accommodate various type of dishes alternatively Gastronorm GN1/1 pans can be used.



Key Features:

- 4 models in the range holding 2 to 5 GN 1/1 Gastronorm type containers.
- Mobile all swivel castors two with brakes
- Size 3, 4 & 5 have condensing unit set at 90° angle. Removes the need for unsightly vents in the front panels.
- Accommodates 60mm deep 1/1 GN pans [not supplied].
- Digital thermostat and temperature control with automatic defrost.
- Advanced air flow design with unique polar air stream technology.
- Fully insulated efficient, eco-friendly, refrigeration. 24 hour operation.
- Maintaining the core product temperature of pre-chilled food below 5°C in ambient condition not exceeding 25°C and 60% relative humidity
- Automatic condensate water evaporation [no need to empty drip trays]
- Supplied with 2m long power cord and 13amp plug [13A 230v 50Hz]

Options:

- Various illuminated overhead gantry options
- Wide choice of coloured outer panels (durable plastic coated steel)
- Fold down solid tray slide or tubular tray rail
- Gastronorm adaptor 3 x 1/3 GN Size (Code: DGPA)
- Prep-shelf and cutting board (Codes: D2PS, D3PS, D4PS & D5PS)
- Rear sliding doors (Codes: D2DD, D3DD, D4DD & D5DD) Deli models only

Note:

Low height models are available set at 800mm high. Ideal for children up to 12 years. These low height models have a “B” added to the model code.

All size 2 refrigerated models come standard with straight-through ventilation. The air vents must remain unobstructed and easily accessible for coil cleaning.


Size 3,4, & 5 have the ventilation on the operator’s side.

Optional solid tray slide

Model	Matching unit size
VC2TS	2
VC3TS	3
VC4TS	4
VC5TS	5

Optional tubular tray rail

Model	Matching unit size
VC2TR	2
VC3TR	3
VC4TR	4
VC5TR	5

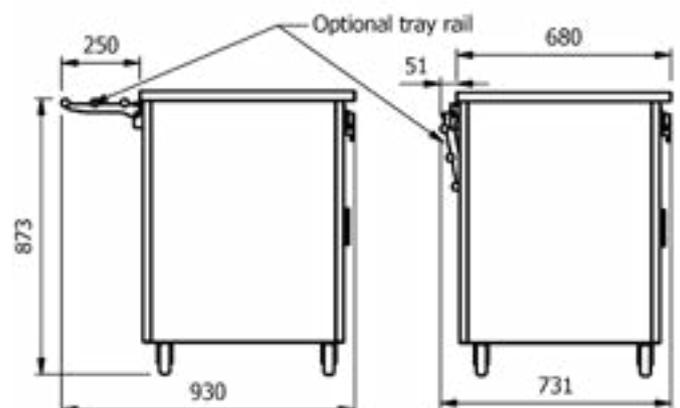



	Model	GN 1/1 Capacity	Weight (kg)	L x W x H (mm)	Electrical Supply	Power Rating (kw)	Rating with gantry (kw)
Base Unit No Gantry	VC2RW*	2	95	830 x 680 x 900	13amp	1.2	1.22
	VC3RW	3	125	1158 x 680 x 900	13amp	1.2	1.23
	VC4RW	4	155	1486 x 680 x 900	13amp	1.2	1.23
	VC5RW	5	185	1814 x 680 x 900	13amp	1.5	1.53

*Special Configurations

Size 2 models are not available in front controls (FC) or no Gantry (NG)



VCRWFC



VCRWNG

Units sited against a rear wall with controls on the front Add **FC** to the code.

Units without a gantry sited with front against a low wall or serving hatch add **NG**

Gantry options

Curved glass type, open or closed front with LED illuminated gantry



	Open Front	Closed Front	Height above top (mm)	Power Rating (kw)
			405	
	VC2LG	VC2LGF	405	0.023
	VC3LG	VC3LGF	405	0.027
	VC4LG	VC4LGF	405	0.032
	VC5LG	VC5LGF	405	0.037

Square glass type, open or closed front with LED illuminated gantry



	Open Front	Closed Front	Height above top (mm)	Power Rating (kw)
			405	
	VC2LGS	VC2LGSF	405	0.023
	VC3LGS	VC3LGSF	405	0.027
	VC4LGS	VC4LGSF	405	0.032
	VC5LGS	VC5LGSF	405	0.037

Deli curved or square glass type, closed front with LED illuminated gantry [Note: the shelf is not chilled]



	Open Front	Closed Front	Height above top (mm)	Power Rating (kw)
			538	
	VC2LGD	VC2LGDSL	538	0.023
	VC3LGD	VC3LGDSL	538	0.027
	VC4LGD	VC4LGDSL	538	0.032
	VC5LGD	VC5LGDSL	538	0.037

Island curved or square glass type, with LED illuminated gantry



			Height above top (mm)	Power Rating (kw)
			405	
	VC2LGi	VC2LGiSL	405	0.023
	VC3LGi	VC3LGiSL	405	0.027
	VC4LGi	VC4LGiSL	405	0.032
	VC5LGi	VC5LGiSL	405	0.037



MADE IN BRITAIN