


SERVUE™ — TOUCHLESS REFRIGERATED SLIDE-IN

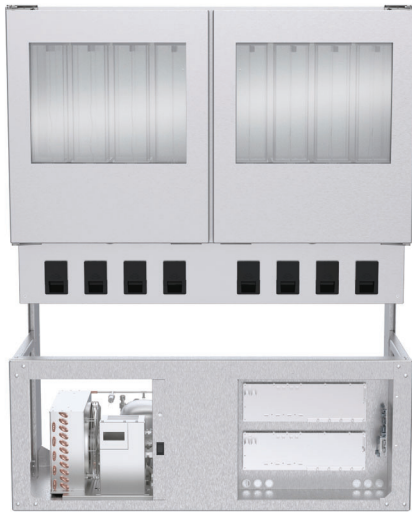

DESCRIPTION

SerVue™ Touchless Refrigerated Slide-In by Vollrath® replaces open salad bars. This self-serve unit stores ingredients in covered canisters behind glass doors to reduce contaminants. The well-lit interior highlights eye-level items that dispense when a bowl is placed under the sensor.

The self-contained refrigerated cabinet maintains ingredients at food-safe temperatures, allowing longer periods of serving and optimal freshness. Remaining food is stored in configurable, covered dispensing canisters to reduce transfer to separate coolers. Canisters are available in two sizes—large with 6-paddle wheel and small with a 6-paddle or 10-paddle to facilitate variety. Customize units with fabricated cabinetry and align side by side or back to back to maximize flexibility.

WARRANTY

All models shown come with a Vollrath® one-year warranty, against defects in materials and workmanship, with an additional four years on the compressor. For full warranty details, please refer to vollrathfoodservice.com.

CERTIFICATIONS



INSTALLATION & CLEARANCE

- Provide a minimum of 80 in² fresh-air intake on front.
- There must be a minimum of 2 ½" (6.4 cm) back clearance.
- Purchaser is responsible for mounting Control Screen.
- Ensure cords have slack and can move freely to avoid strain at connection points, and kinking / pinching.
- Unit is for indoor use only and must be installed in a surrounding cabinet (fabricated separately).
- Customer-side lockable doors are recommended.
- Each SerVue unit requires a dedicated electrical circuit rated to the nameplate value.

Due to continued product improvement please consult vollrathfoodservice.com for current product specifications.

ITEMS & ACCESSORIES

Model			
FC-4TD-28120-C			
Item	Description		
2210791	Lg Canister Assembly w/ Lg 6-Paddle Wheel (3 included)		
2210792	SM Canister Assembly w/ Sm 6-Paddle Wheel (5 included)		
2210793	SM Canister Assembly w/ Sm 10-Paddle Wheel (not included, Sm 10-Paddle fits in small canister)		
Item	Description	Item	Description
2210691	Canister Cover Sm	2210643	Funnel Assembly Sm
2210690	Canister Cover Lg	2210641	Funnel Assembly Lg
2210702	Serving Canister Sm, 172 fl. oz.	2210738	Agitation Rod Sm
2210701	Serving Canister Lg 306 fl. oz.	2210739	Agitation Rod Lg
2210645	Wheel Shaft Sm	2210707	Dispensing Wheel Sm 6-Paddle
2210647	Wheel Shaft Lg	2210706	Dispensing Wheel Lg 6-Paddle
2210786	Funnel Adapter Assembly Sm	2210708	Dispensing Wheel Sm 10-Paddle
2210785	Funnel Adapter Assembly Lg		

NOTE: Unit is made to order and cannot be canceled or returned. Visit VollrathFoodService.com for canister part details.



FEATURES & BENEFITS

- Touchless dispensing & enclosed canisters reduce germs.
- LED lighting in refrigerated cabinet attracts customers.
- Insulated glass doors offer visibility to food.
- 4-well footprint simplifies serving-line integration.
- 8 Interchangeable canisters are included — 3 large and 5 small — allow a variety of ingredient configurations.
- Two sets of sensors allow one person to dispense at canisters 1-4, while another uses canisters 5-8.
- Simplistic use and maintenance enhances convenience.
- Self-contained refrigeration maintains food-safe temperatures, reduces ingredient-to-cooler transfer, and optimizes product freshness.
- Concealed Control Touchscreen facilitates technician/operator-only use and tethered 3' (91.4 cm) cord allows versatile mounting and placement inside the cabinet.
- Condensate evaporator eliminates the need for drains.
- Stainless steel design provides food-safe durability.
- Integrated canister paddle wheels facilitate gentle ingredient dispensing for optimal product quality.



Approvals	Date

SERVUE™—TOUCHLESS REFRIGERATED SLIDE-IN



DIMENSIONS – INCHES (CM)

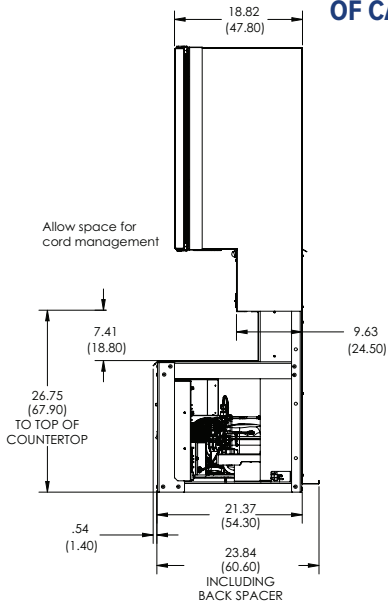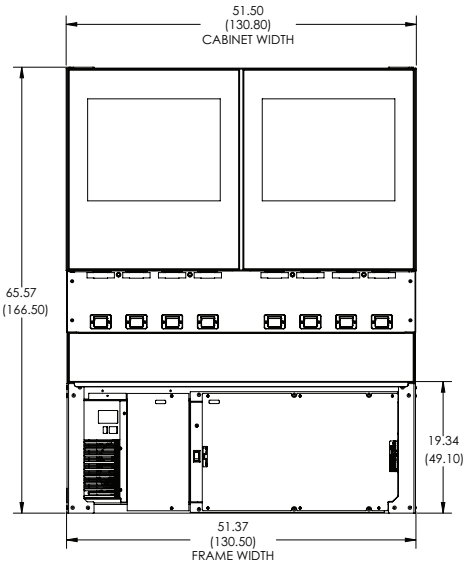

ALL SIDES MUST REMAIN EASILY ACCESSIBLE TO SERVICE PERSONNEL WITHOUT DISMANTLING OF CABINET OR INFRASTRUCTURE.

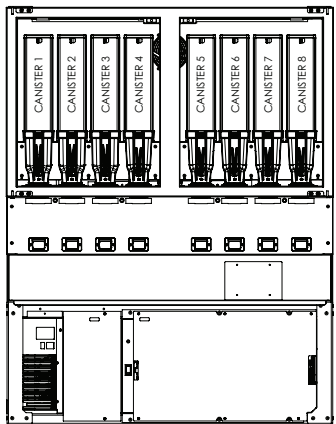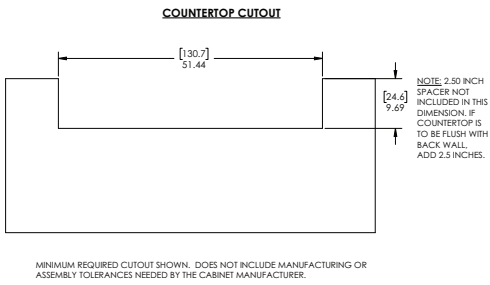

Ø 0.44 MOUNTING HOLE LOCATIONS

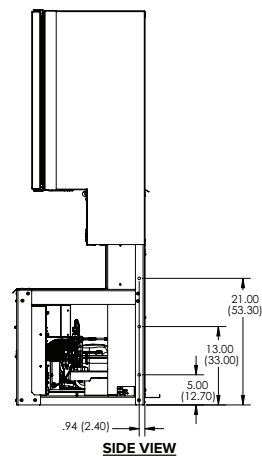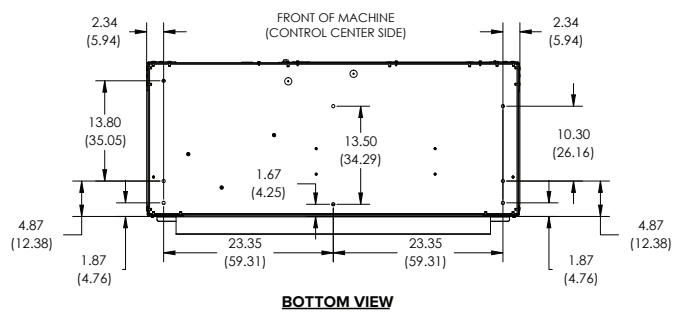

DIMENSIONS & SPECIFICATIONS (WITHOUT FABRICATED CABINET)

Model	Electrical					Weight		
FC-4TD-28120-C	V Base Unit	hz	Running Amps	Plug	Control	lbs (kg)		
	120 VAC	60	5.3	NEMA 5-15P	30.50" (77.47) W Tethered 3' Internal Cord	425.00 (192.80)		
	Unit Dimensions in Inches							
	H	W Cab	W Frame	H Base Only	H Base to Countertop	Drip Edge	D Sensor to Back	D w/Spacer
	65.57	51.50	51.37	19.34	26.75	.54	9.63	23.84

NOTICE: Spill trays are not included and are the responsibility of the purchaser. Vollrath® tray 30522 is suggested and any type of spill/collection system is highly recommended.