



ELECTRIC **SALAMANDER BROILER**

IMPERIAL**ISB-36-E**

ELECTRIC ELEMENT

- Two 3 KW incoloy heating elements.
- Independent left and right heating zones maximize function and performance.
- 208 and 240 volts, 3 phase operation

EXTERIOR FEATURES

- Constructed using aluminized steel for maximum heat retention and heat distribution.
- Stainless steel front, sides and top.
- Welded and polished stainless steel seams.
- Mounts over IR and IHR Imperial ranges with mounting accessory.
- Can be wall or counter mounted.
- One year parts and labor warranty.

BROILER RACK

- Chrome plated heavy duty rack.
- Loads and unloads easily.
- 4 positions with positive locking broiler carriage.
- Full width, large capacity for high production in peak hours.
- Cradle and carriage design for cooking foods directly on the rack.
- Spring balanced cradle assembly rolls out 10" (254 mm) for easy loading and unloading.
- Full width broiler pan has a full length pull handle. Pan removes easily for cleaning.

**MADE IN USA****IMPERIAL**


1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

© 2025 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates



ELECTRIC

SALAMANDER BROILER

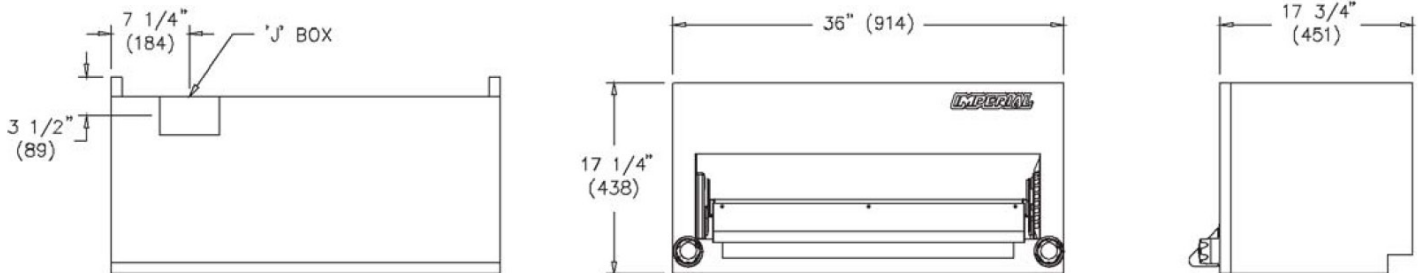

SALAMANDER BROILER

MODEL	DESCRIPTION	DIMENSIONS	CRATED DIMENSIONS	ELEMENTS KW	ELEMENTS NUMBER	SHIP WEIGHT KG	SHIP WEIGHT LBS
ISB-36-E	SALAMANDER	36" W X 17 3/4" D X 17 1/4" H (914 X 451 X 438 MM)	38" W X 20" D X 21" H (965 X 508 X 533 MM)	3 KW ea.	2	95	210

ELECTRICAL REQUIREMENTS

MODEL	TOTAL KM	VOLTS	PH	AMPS
ISB-36-E	6	208	1	28
	6	240	1	25
	6	208	3	25
	6	240	3	22

CLEARANCE REQUIREMENTS

For use only on non-combustible surfaces. Legs are required for counter top installation. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.



MADE IN USA

OPTIONS AND ACCESSORIES

- Wall mounting kit
- 4" (102 mm) leg kit for counter mounting
- Reinforcement channels to mount on range

