

Frymaster®

OCF30G

OIL CONSERVING GAS FRYER



FPGL230CA

Oil-conserving fryers deliver the same cooking performance as traditional models while using 40% less oil, reducing both consumption and waste. Their energy-efficient design supports greener operations and safer, more streamlined maintenance. Every feature is purpose-built to solve real kitchen challenges while promoting sustainability.

Use 40% Less Oil: With built-in filtration and a high fresh-to-used oil ratio, OCF fryers can extend oil life by up to 92%, meaning fewer refills and reduced oil usage. The result is substantial cost savings and powerful environmental benefits.

Smart Control for Quality & Efficiency: The 3000 Controller monitors food and oil quality, oil life, and fryer performance, helping optimize every cook. With 20 programmable buttons and automatic load compensation, it ensures consistent results with minimal effort.

Flexible Frying, Tailored to Your Kitchen: The OCF fryer offers unmatched versatility with full-pot and split-pot models to suit a variety of cooking needs. Optional features like basket lifts, a standalone Spreader cabinet, and built-in manual filtration enhance productivity and adaptability in any kitchen setup.

Project _____
 Item _____
 Quantity _____ CSI Section 11400 _____
 Approval _____ Date _____

MODELS

- FPGL130C
(no built-in filtration)
- FPGL230CA
- FPGL330CA

CONTROLLERS

- 3010
- 3000 (standard)

OPTIONS / ADD-ONS

- Split pots
- Basket lifts
- Spreader cabinet
- Bulk oil: disposal and fresh fill
- Semi-solid shortening kit

SPECIFICATIONS

OIL CAPACITY	30-lbs. (15 liters) PER FULL 17-lbs. (8.5 liters) PER SPLIT
FRYING AREA	13" x 14" x 3.75" (33 x 35.6 x 9.5 CM) PER FULL 6" x 14" x 3.75" (15 x 35.6 x 9.5 CM) PER SPLIT
POT TYPE	Open Pot (full or split)
GAS TYPE	Natural Gas Propane Mix
PLUG	NEMA 5-15P
POWER	70,000 BTU/HR (CE - 18.6 KW NET) PER FULL
STANDARD FEATURES	<ul style="list-style-type: none"> ▪ Infrared burners ▪ Deep cold zone ▪ Center-mounted RTD 1° action temperature probe ▪ Drain safety switch ▪ Combination gas valve with regulator ▪ Electronic ignition ▪ Innovative safety features ▪ Independent frypot construction ▪ Stainless steel frypot, door, and cabinet sides
STANDARD ACCESSORIES	<ul style="list-style-type: none"> ▪ (2) Twin baskets PER FRYPOT ▪ Basket hanger(s) ▪ Basket support rack(s) ▪ Jug-in-box (JIB) holder ▪ Filter starter kit ▪ Adjustable casters

Liter conversions are for liquid shortening @ 70° F



REVISED SPRING 2026

Frymaster®

318-865-1711
 1-800-221-4583
info@frymaster.com

8700 Line Avenue
 Shreveport, LA 71106-6800, USA
FRYMASTER.COM

 **WELBILT**
 an AI Group Company

DIMENSIONS	MODEL	OIL CAPACITY PER FRYPOT	OVERALL SIZE			DRAIN HEIGHT
			WIDTH	DEPTH	HEIGHT	
	FPGL130C	30-lbs. (15 liters)	15.9" (40.3 cm)	35.7" (90.6 cm)	45.7" (116.2 cm)	11.4" (29 cm)
FPGL230CA	17-lbs. (8.5 liters)	31.5" (79.9 cm)	29.9" (76.0 cm)	46.5" (118.1 cm)		
FPGL330CA	8.5-lbs. (4.25 liters)	47.1" (119.5 cm)				

CRATED	MODEL	WEIGHT	WIDTH	DEPTH	HEIGHT	CU. FT.	CLASS
	FPGL230CA	544-lbs. (261 kg)	38" (96.5 cm)	44" (111.8 cm)	53" (134.6 cm)	51	77.5
FPGL330CA	723-lbs. (328 kg)	53" (134.6 cm)	72				



Information is APPROXIMATE and may vary at time of shipment due to options/add-ons

GAS REQ.	GAS TYPE	INC. GAS PRESSURE	POWER
	NATURAL GAS	6" W.C.—14" W.C.	
	LIQUID PROPANE	9" W.C.—14" W.C.	
			70,000 BTU/HR (CE - 18.6 KW NET) PER FULL

POWER	REGION	CONTROLS PER FRYPOT	FILTER PER FRYPOT	BASKET LIFTS PER FRYPOT
	DOMESTIC	1 A	8 A	3 A
	EXPORT	1 A	4 A	2 A

Plug is optional on all units shipped with a cord. Canada is an exception; and cord, where available, must have a plug attached.

Cord length and gauge as well as plug type and style available vary depending upon fryer model, voltage, kW, destination, and customer specifications. Consult local codes or contact factory.

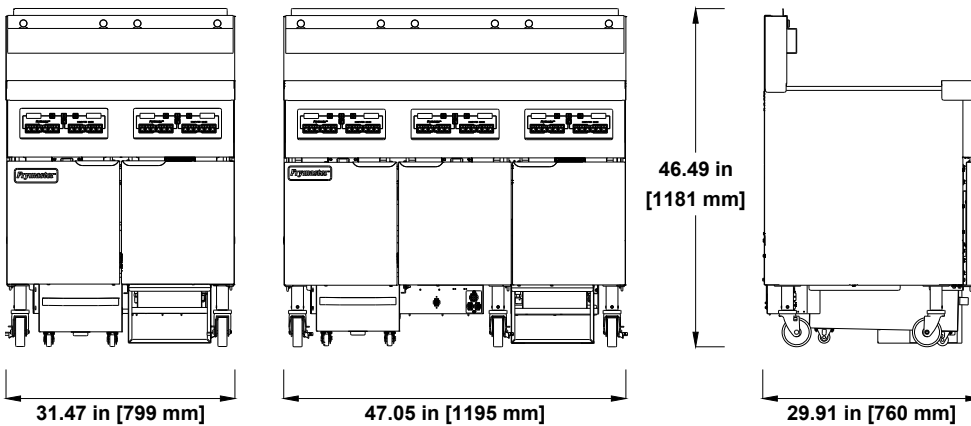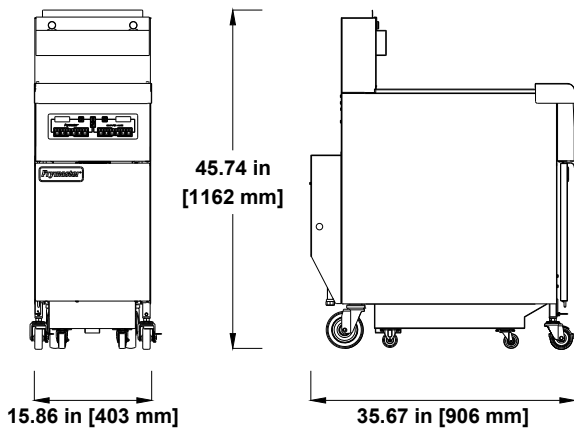

GAS CONNECTION	
FRYPOTS	SIZE NPT
1	(1) 3/4"
2-3	(1) 1"

CLEARANCE INFORMATION

Front: 36" (91.4 cm) for servicing and proper operation.

Sides & Rear: 6" (15.2 cm) from any combustible material.

VENTILATION REQUIREMENTS

When installing any fryer, NFPA Standard No. 96 must be strictly followed.

NOTES

- **DO NOT CURB MOUNT**

HOW TO SPECIFY

Electric or gas, gas type (if applicable), pot type, energy output, oil capacity, number of frypots, controller, filtration type, and optional feature(s).

- **Elevation:** Must specify elevation if between 5,000 – 10,000 ft. (Fryer may not perform at optimum levels above 10,000 ft.)

WARRANTY

Frypot & Assembly

7 years: Parts + Labor

Controller

1st year: Parts + Labor

2nd year: Parts Only

All Other Parts

1st year: Parts + Labor

2nd year: Parts Only