



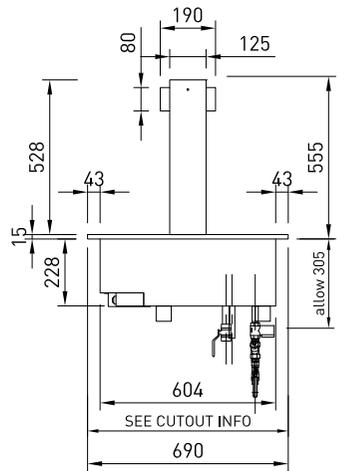

PRODUCT FEATURES

- Dual purpose used wet or dry
- Auto Fill - Dry elements
- Overhead halogen lights with adjustable dimmer
- Full size pans 65mm deep supplied (max 100mm)

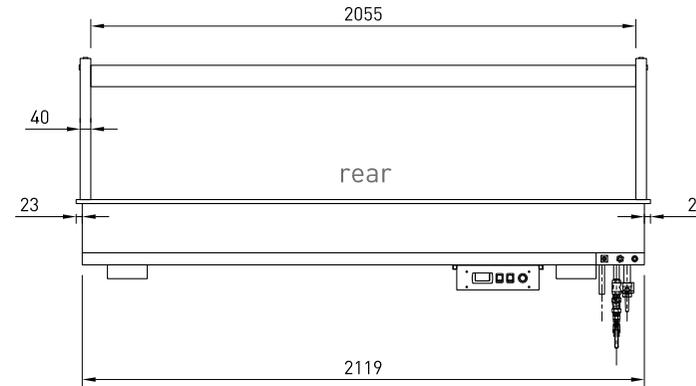

LSBM LEFT SIDE ELEVATION

GASTRO PANS

Units supplied with 1/1 pans at 65mm deep, max pan depth is 100mm



ELECTRICAL POWER

Electrical power cord 3000mm 1 phase connection required.

Unit must be hard wired on site to isolation switch.

WATER DRAINAGE

Screw on stop cock valve drain pipe
Ideally drain connected to waste. 90deg^C rated pipe
Overflow flexible waste pipe 19mm dia.1000 mm length from spigot must be connected to waste.

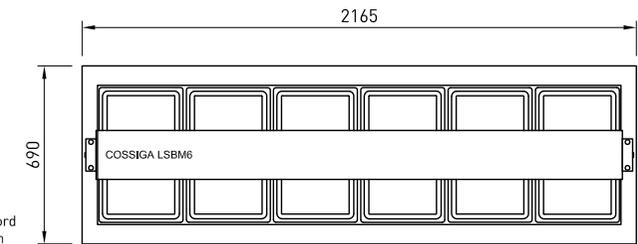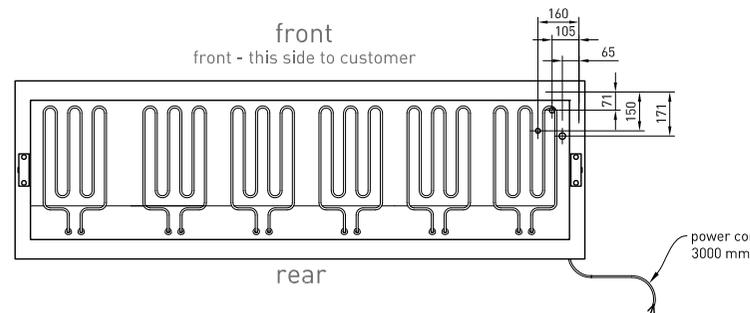

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

***ASSEMBLY REQUIRED**

MODEL	CABINET					PANS	WATER FILL	TEMP	DISPLAY AREA	POWER		CONNECTION ELECTRICAL POWER CORD 3000MM	VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]	CUT OUTS					LITERS	DEG C			M2	KW 230V	AMPS WITH LAMP	NZ/AUS/UK
LSBM6	2165	690	555	140	2140X635	6 x 1/1 65mm Gastro Pans	113	75 -95	1.10	6.56	28.5	40 AMP LEAD ONLY	220~240V	2270	770	670	140